Fence Guide & Catalog

2025

KENCOVE
FARM FENCE SUPPLIES

Fast, Friendly Service and Expert Advice

KENCOVE REWARDS

Sign up today and start earning!
Page 80

Featured Products

Strainrite Stretcher Bars

Page 11

Milwaukee Staple Gun

Page 16

LockJawz EXT 5.0

Page 39

Tru-Test Waterers

Page 59

HIGH-TENSILE, WOVEN WIRE, POSTS, GATES, ELECTRIC, PORTABLE SUPPLIES, HORSE FENCE

FREE SHIPPING
On Qualified Orders of $99 and More

1-800-KENCOVE
www.kencove.com

KENCOVE
FARM FENCE SUPPLIES

2025

Wire 3-9
Deer Fence. 10
Tools/Hardware 11-23
Electric Fence Supplies 24-41
Electric Netting 40-41
Posts 42-45
Post Drivers 46-53
Gates 54-57
Rotational Grazing. 58-66
Specialty Applications 67
Horse Fence. 68-75
How To 76-79

Easy Ways to Order

Phone
1-800-KENCOVE or 724-459-8991
Monday-Thursday 7am-6pm (EST)
Friday 7am-5pm (EST)
Saturday 8am-12pm (EST)

Fax
888-908-5353 (USA only)

Online
www.kencove.com or sales@kencove.com

Mail or Stop In

PA Warehouse
344 Kendall Rd
Blairsville, PA 15717

MO Warehouse
11409 East 218th St
Peculiar, MO 64078

IN Warehouse
113 West 5th St
Earl Park, IN 47942

ID Warehouse
102 Summers St
Caldwell, ID 83605

Warehouse/Order Pickup
PA: Mon-Fri 8am-4:30pm EST,
Sat 8am-12pm EST (Mar-Oct)
IN: Mon-Fri 8am-4pm EST
MO: 9am-4pm CST, Saturday by appointment
ID: Mon-Fri 7am-4pm MST

Shipping Policy

Free delivery on orders of $99.00 and more with no oversize or heavy items (indicated with). Free shipping applies to the Contiguous US only. Any orders shipping to AK, HI, Canada, or Mexico that are free shipping qualified are eligible for up to a 20% shipping discount. Kencove pays the shipping portion of your order which qualifies for free shipping. If a truck shipment is lower cost, and you can unload the truck, we pay the portion of the truck shipment cost that is free shipping qualified. $45.00 pallet fee may apply for oversize items such as deer net, woven wire, and t-posts.

Shipping carrier and charges are based on order weight, size, and destination. We work with dozens of shipping carriers to find the best rates. For freight or flatbed shipments, the customer is responsible for offloading and signing for goods on arrival. Carefully inspect your order upon receipt, and notify the carrier of damaged or missing packages. This information must be documented on the bill of lading. Shortages or errors must be reported to Kencove within 48 hours. FedEx fees, such as address corrections and Saturday delivery, are charged as published by the shipping carrier. For international shipments, the customer is responsible for all customs in the form of duties and taxes associated with the shipment. Freight quotes do not include this cost.

Items marked with symbol do not qualify for free shipping. These are usually large or heavy products. See page 82 for payment and return policies.

⚠ Proposition 65 Warning for California Residents:

This product can expose you to chemicals including di-2-ethylhexyl phthalate (DEHP), which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

Follow us:

















BASIC FENCE LAYOUT

WATCH THE VIDEO

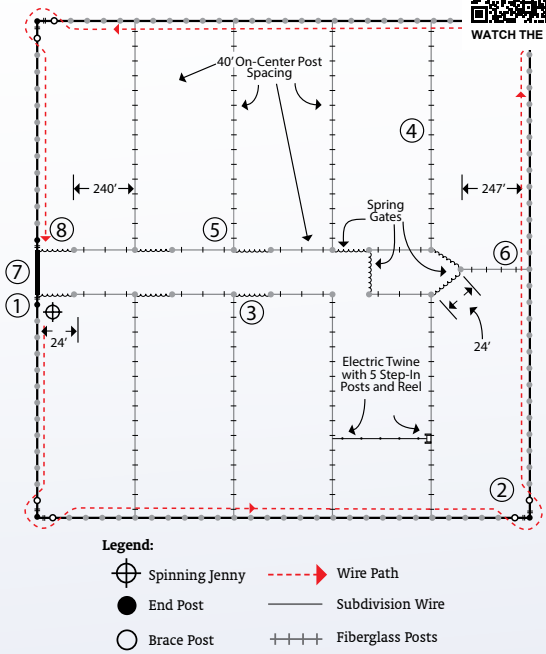

Intensively managed grazing of pastures can greatly improve the land's yield and quality. The basic idea is to concentrate the animals in a small enough area so they will harvest everything quickly, even the less tasty growth. Then move the animals to other small areas and let the eaten areas replenish without animal disturbance. After waiting for the proper maturity of the desired plants, the area is grazed again. Organic fertilizer (manure) is evenly distributed with no effort. Higher gains come from the pasture because the plants have time to recover and animals can be fed better. The need for expensive machinery and material inputs is reduced, allowing profits to jump. To do this much animal moving, the fencing must be effective and easy to use. A quick system is to open and close gates to a permanently divided pasture, but most people do not have enough permanent divisional fences. A setup with long, narrow pastures allows twine to be put up across the narrow width rather quickly. The most simple and economical way to increase the number of pastures is to use portable fences. Electric twine, fiberglass rods, plastic step-in posts, rewind reels, and portable energizers work together to make an excellent portable fencing system.

Max-Ten 200®

200 KSI, 12½ Gauge

The favorite of fence builders across the country for over 30 years.

- Polished electroplate
- Class 3 galvanized
- Ideal for all perimeter fences

BEST SELLING

Minimum break strength = 1,540 lbs

4,000' coil, 106 lb . . . . . WK2 . . . . . *
2,000' coil, 58 lb . . . . . WK2D . . . . . *
1,000' coil, 27 lb . . . . . WK2T . . . . . *
500' coil, 13 lb . . . . . WK2-500. . . . . *

Zinc/Aluminum

180 KSI, 12½ Gauge

ZA coated wire lasts up to 4-times as long as galvanized wire.

- Class 3 zinc/aluminum coating
- Hand knot or crimp
- Ideal for all perimeter fences

LONGEST LASTING

WG18 minimum break strength = 1,385 lbs

4,000' coil, 104 lb, 180 KSI. . . . WG18. . . . . *
2,160' coil, 57 lb, 180 KSI. . . . . WG18U . . . . . *
1,000' coil, 26 lb, 180 KSI. . . . . WG18T. . . . . *

180 KSI, 12½ Gauge

The standard for both electric and non-electric fences.

- Class 3 galvanized
- Hand knot or crimp
- Ideal for all perimeter fences

LOWEST PRICE

Minimum break strength = 1,385 lbs

4,000' coil, 104 lb . . . . . WSA2 . . . . . *
2,000' coil, 52 lb . . . . . WSA2D . . . . . *
1,000' coil, 26 lb . . . . . WSA2T . . . . . *
500' coil, 13 lb . . . . . WSA2-500 . . . . . *

Pricing Alert

* Due to fluctuating supply and cost of material please call 1-800-KENCOVE or visit us at www.kencove.com for current availability and pricing.

Max-Ten 200+®

210 KSI, 12½ Gauge

Our strongest 12½ gauge wire.
Excellent for electric or non-electric fences.

- Polished electroplate
- Class 3 galvanized
- Ideal for all perimeter fences

Minimum break strength = 1,617 lbs

4,000' coil, 104 lb . . . . . .WM2. . . . . *
2,000' coil, 52 lb . . . . . .WM2D . . . . . *
1,000' coil, 26 lb . . . . . .WM2T . . . . . *

200 KSI, 12½ Gauge

Nearly twice the breaking strength of standard 2-strand barbed wire.

- Class 3 galvanized
- Ideal for all perimeter fences
- Works best with crimp sleeves

Minimum break strength = 1,540 lbs

4,000' coil, 105 lb . . . . . WD2 . . . . . *
2,000' coil, 53 lb . . . . . WD2D . . . . . *
1,000' coil, 27 lb . . . . . WD2T . . . . . *

Black, 200 KSI, 12½ Gauge

With a black-painted coating, this wire emphasizes appearance and performance.

- Class 3 galvanized
- Ideal for all perimeter fences
- Works best with crimp sleeves

Minimum break strength = 1,540 lbs

4,000' coil, 106 lb, black . . . . . WBL2 . . . . . *
2,000' coil, 53 lb, black . . . . . WBL2D . . . . . *
1,000' coil, 26 lb, black . . . . . WBL2T . . . . . *

⚠ California residents see page 2 for Proposition 65 Warning

Max-Ten 170™

170 KSI, 12½ Gauge

- Polished electroplate
- Class 3 galvanized
- Works best for hand-knotting

Minimum break strength = 1,078 lbs

4,000' coil, 103 lb . . . . . WB17 . . . . . *
2,000' coil, 52 lb . . . . . WB17D . . . . . *
1,000' coil, 26 lb . . . . . WB17T . . . . . *

210 KSI, 14 Gauge

A popular alternative to 12½ gauge wire because it requires less bracing.

- Polished electroplate
- Class 3 galvanized
- Ideal for electric and interior fences

Minimum break strength = 1,004 lbs

5,000' coil, 89 lb . . . . . .WM45 . . . . . *
2,500' coil, 45 lb . . . . . .WM4. . . . . *
1,000' coil, 18 lb . . . . . .WM4T . . . . . *

210 KSI, 16 Gauge

Makes it possible to build low-cost subdivision fences quickly.

- Polished electroplate
- Class 3 galvanized
- Ideal for electric and interior fences

Minimum break strength = 614 lbs

6,000' coil, 66 lb . . . . . .WM6. . . . . *
3,000' coil, 33 lb . . . . . .WM6D . . . . . *
1,000' coil, 11 lb . . . . . .WM6T . . . . . *

Easy Payout Reels

This Class 3 galvanized wire is preloaded onto a wooden payout reel, making it easy and convenient to use.

12½ gauge, 1,000' . . . . . WL2 . . . . . *
14 gauge, 1,320'. . . . . WL4 . . . . . *
16 gauge, 2,640'. . . . . WL6 . . . . . *
16 gauge, 1,320'. . . . . WL6.5. . . . . *

You can expect Kencove's high-quality **Soft Wire** to last up to 50 years. Although soft wire can be easy to overstretch and break, many prefer it because it is simple to repair and retighten.

12½ Gauge Soft Wire Coils

Class 3 galvanized, 1,000'. . . . . WSS1 . . . . . *

Aluminum Wire, .08" Diameter

- Rustproof wire lasts up to 50 years
- Easy to repair & retighten
- Ideal for electric fencing

1,320' coil. . . . . .TT-828934 . . . . . *
2,640' coil . . . . . .TT-828935 . . . . . *

Barbed Wire

An affordable, effective option for livestock containment, predator control, and exclusion fencing. Available with two and four-point barbs in class 1-3 galvanization. ***Do not electrify.***

Rangemaster, 15½ ga, Class III galvanization, 4 point, 1,320' . . . . . WBW. . . . . *
Rangemaster, 12½ ga, Class I galvanization, 2 point, 1,320' . . . . . WBW-2PT-C1-5. . . . . *

Items with this symbol do not qualify for free shipping.

KIWI® Fixed-Knot Woven Wire Fence

KIWI® Fixed-Knot Woven Wire is an excellent choice if you are looking for a non-electric fence. Manufactured using Class III, Electro-galvanized Max-Ten wire providing superior strength and longevity. The Electro-galvanization process does not expose the wire to high temperatures so wire strength and hardness is not compromised. Made in the USA.

6" Stay Spacing, 330' Roll

35" height, 7 lines . . . . . WDN7-6BB . . . . . *
Save on 6 rolls or more . . . . . *
42" height, 8 lines . . . . . WDN8-6BB . . . . . *
Save on 6 rolls or more . . . . . *
48" height, 13 lines . . . . . WDN13-6BB . . . . . *
Save on 6 rolls or more . . . . . *
49" height, 9 lines . . . . . WDN9-6BB . . . . . *
Save on 6 rolls or more . . . . . *
60" height, 10 lines . . . . . WDN10-6BB . . . . . *
Save on 6 rolls or more . . . . . *
61" height, 15 lines . . . . . WDN15-6BB . . . . . *
Save on 6 rolls or more . . . . . *
75" height, 17 lines, deer . WDN17-6BB . . . . . *
Save on 6 rolls or more . . . . . *
96" height, 20 lines, deer . WDN20-6BB . . . . . *
Save on 6 rolls or more . . . . . *

2x4 Safety Mesh

48" height, 13 lines, 200' . . WH4-200BB . . . . . *
Save on 4 rolls or more . . . . . *
48" height, 13 lines, 100' . . WH4BB . . . . . *
Save on 9 rolls or more . . . . . *
60" height, 16 lines, 200' . . WH5-200BB . . . . . *
Save on 4 rolls or more . . . . . *
72" height, 19 lines, 100' . . WH6BB . . . . . *
Save on 9 rolls or more . . . . . *

3" Stay Spacing, 200' Roll

42" height, 8 lines . . . . . WDN8-3BB . . . . . *
Save on 4 rolls or more . . . . . *
48" height, 13 lines . . . . . WDN13-3BB . . . . . *
Save on 6 rolls or more . . . . . *

12" Stay Spacing, 330' Roll

35" height, 7 lines . . . . . WDN7-12BB . . . . . *
Save on 9 rolls or more . . . . . *
42" height, 8 lines . . . . . WDN8-12BB . . . . . *
Save on 9 rolls or more . . . . . *
48" height, 13 lines . . . . . WDN13-12BB . . . . . *
Save on 9 rolls or more . . . . . *
49" height, 9 lines . . . . . WDN9-12BB . . . . . *
Save on 9 rolls or more . . . . . *
96" height, 20 lines. . . . . WDN20-12BB . . . . . *
Save on 8 rolls or more . . . . . *

12" Stay Spacing, 660' Roll

35" height, 7 lines . . . WDN7-12-660BB . . . . . *
Save on 4 rolls or more. . . . . *
42" height, 8 lines . . . WDN8-12-660BB . . . . . *
Save on 4 rolls or more. . . . . *
48" height, 13 lines . . WDN13-12-660BB. . . . . *
Save on 4 rolls or more. . . . . *
49" height, 9 lines . . . WDN9-12-660BB . . . . . *
Save on 4 rolls or more. . . . . *

⚠ California residents see page 2 for Proposition 65 Warning

Fixed-Knot Woven Wire Fence

- Class 3 galvanized high-tensile
- Graduated spacing (smaller at bottom)
- 12½ gauge wire

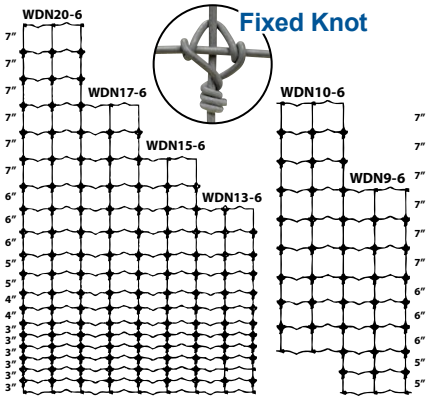

Call for discounts on pallet quantities.

3" Stay Spacing, 200' Roll ⚠

48" height, 13 lines . . . . . WDN13-3 . . . . . *
61" height, 15 lines . . . . . WDN15-3 . . . . . *

6" Stay Spacing, 330' Roll ⚠

42" height, 8 lines . . . . . WDN8-6 . . . . . *
48" height, 13 lines . . . . . WDN13-6 . . . . . *
48" height, 13 lines, black . . WDN13-6BL . . . . . *
49" height, 9 lines . . . . . WDN9-6 . . . . . *
60" height, 10 lines . . . . . WDN10-6 . . . . . *
61" height, 15 lines . . . . . WDN15-6 . . . . . *
75" height, 17 lines . . . . . WDN17-6 . . . . . *
75" height, 17 lines, black . . WDN17-6BL . . . . . *
96" height, 20 lines . . . . . WDN20-6 . . . . . *
96" height, 20 lines, black . . WDN20-6BL . . . . . *
120" height, 23 lines . . . . . WDN23-6 . . . . . *

12" Stay Spacing, 330' Roll ⚠

49" height, 9 lines . . . . . WDN9-12 . . . . . *
96" height, 20 lines . . . . WDN20-12 . . . . . *

12" Stay Spacing, 660' Roll ⚠

49" height, 9 lines . . . . . WDN9-12-660 . . . . . *

Hinge-Joint Woven Wire Fence

is designed with the safety and security of small livestock in mind. Class 3 galvanization adds 2½ times the zinc coating of conventional fencing for a longer, rust-resistant fence life. Graduated horizontal line spacing combined with 6" stay spacing ensures exceptional predator protection and peace of mind. Aside from livestock inclusion and protection, this fence also works as an exclusion fence around newly planted trees.

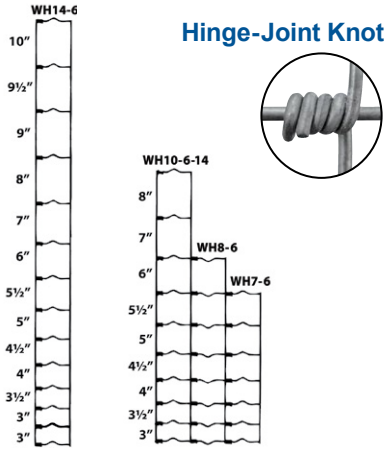

14 Gauge High-Tensile Wire, 330' Roll ⚠

*These rolls are constructed of 12½ ga wire on the top and bottom lines, and 14 ga wire on the interior lines.

26" height, 7 lines . . . . . WH7-6 . . . . . *
32" height, 8 lines . . . . . WH8-6* . . . . . *
47" height, 10 lines . . . . . WH10-6-14* . . . . . *
Save on 9 rolls or more . . . . . *

12½ Gauge High-Tensile Wire, 330' Roll ⚠

47" height, 10 lines . . . . WH10-6-12.5 . . . . . *
Save on 9 rolls or more . . . . . *
39" height, 9 lines . . . . . WH9-6 . . . . . *

Items with this symbol do not qualify for free shipping.

2x4 Fastlock Woven Wire Fence

- Class 3 galvanized, 12½ gauge
- Safe, smooth side knot
- Excellent predator control for high-value livestock
- 2" x 4" wire spacing

Vertical wire is uncut from top to bottom and all junctions are held together with a special S-shaped knot.

Fastlock Woven Wire

12½ gauge high-tensile wire

48" height, 100' . . . . . WH4 . . . . . *
48" height, 200' . . . . . WH4-200 . . . . . *
60" height, 100' . . . . . WH5 . . . . . *
60" height, 200' . . . . . WH5-200 . . . . . *
72" height, 100' . . . . . WH6 . . . . . *
96" height, 100' . . . . . WH8 . . . . . *

Black Fastlock Woven Wire

12½ gauge high-tensile wire

48" height, 100', black . . . WH4BL . . . . . *
48" height, 200', black . . . WH4BL-200 . . . . . *
60" height, 100', black . . . WH5BL . . . . . *
60" height, 200', black . . . WH5BL-200 . . . . . *
72" height, 100', black . . . WH6BL . . . . . *

Material List

Fencer's Choice® Stretcher Bar	Page 11
Fencer's Choice® Stretcher Bar Puller	Page 11
The Wire Twister	Page 11
Wire Bending Tool	Page 11
Wire Twisting Tool	Page 11
Easy Wire Puller	Page 12
Fence Staple Gun	Page 16
Fence Staples	Page 16
Gripple T-Clip	Page 18

Sheep & Goat Fence

4" x 4" wire spacing provides strong confinement and deters animals from putting their heads through the fence. The smooth side of the S-knot prevents injury to animals. With a strong mesh design, the potential for injury is minimized by flexing upon impact. Class 3 galvanized high-tensile wire will last more than 3-times as long as Class 1 coating.

- Strong confinement
- Durable S-knot prevents injury
- 12½ gauge, Class 3 galvanized high-tensile
- Easy to install on flat or hilly terrain

48" x 100' . . . . . WH4X4-100 . . . . . *
Save on 9 rolls or more . . . . . *
48" x 330' . . . . . WH4X4 . . . . . *
Save on 4 rolls or more . . . . . *

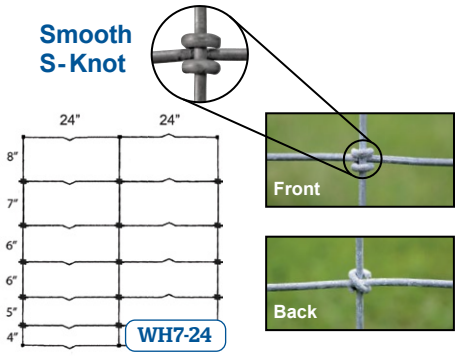

Fastlock Woven Wire

Designed for Cattle, Sheep, & Goats

Larger wire spacing makes it lighter and easier to install than standard woven wire. The potential for injury is minimized by flexing upon impact. 12½ gauge, Class 3 galvanized high-tensile wire provides strength and long life.

12½ gauge high-tensile wire, 24" spacing, 330'

36" height, 7 lines . . . . . WH7-24 . . . . . *

⚠ California residents see page 2 for Proposition 65 Warning

NEW

TORNADO®

Tornado® Wire

Quality woven wire is not just about tensile strength, it's also about ductility. Tornado Wire strives to provide both to ensure that your wire is strong enough to withstand the demands of farm and ranch life while being malleable enough to not break when wrapped and tied. Tornado Wire is the choice of many fence contractors for this very reason. Better performance. Better Installation. Better lifetime costs.

Titan Joint, 3" Spacing, 200'

48" height, 13 lines . . . WDN13-3T . . . . . *
Save on 6 rolls or more. . . . . *

Titan Joint, 6" Spacing, 330'

48" height, 13 lines . . . WDN13-6T . . . . . *
Save on 6 rolls or more. . . . . *
61" height, 15 lines . . . WDN15-6T . . . . . *
Save on 6 rolls or more. . . . . *
75" height, 17 lines . . . WDN17-6T . . . . . *
Save on 6 rolls or more. . . . . *
96" height, 20 lines . . . WDN20-6T . . . . . *
Save on 6 rolls or more. . . . . *
42" height, 8 lines . . . . WDN8-6T . . . . . *
Save on 12 rolls or more. . . . . *
49" height, 9 lines . . . . WDN9-6T . . . . . *
Save on 6 rolls or more. . . . . *

Titan Joint, 12" Spacing, 330'

96" height, 20 lines . . . WDN20-12T . . . . . *
Save on 6 rolls or more. . . . . *
49" height, 9 lines . . . . WDN9-12T . . . . . *
Save on 6 rolls or more. . . . . *

Titan Joint, 12" Spacing, 660'

49" height, 9 lines . . . . WDN9-12-660T . . . . . *
Save on 6 rolls or more. . . . . *

Torus, 2" Spacing, 100'

48" height, 13 lines . . . . . WH4T. . . . . *
Save on 9 rolls or more. . . . . *

Torus, 2" Spacing, 200'

48" height, 13 lines . . . . . WH4-200T. . . . . *
Save on 6 rolls or more. . . . . *
60" height, 16 lines . . . . . WH5-200T. . . . . *
Save on 6 rolls or more. . . . . *

Torus, 4" Spacing, 330'

48" height, 13 lines . . . . . WH4X4T . . . . . *
Save on 6 rolls or more. . . . . *

Torus, 4" Spacing, 660'

48" height, 13 lines . . . . . WH4X4-660T . . . . . *
Save on 2 rolls or more. . . . . *

Items with this symbol do not qualify for free shipping.

Photos courtesy of Goodman's Whitetail Haven

Fixed-Knot Woven Wire Fence

Graduated spacing, with the combination of high-tensile and solid vertical stays, provides excellent control for animal containment, exclusion, and predator protection. Class 3 galvanized.

6" Stay Spacing, 330' Roll ⚠

96" height, 20 lines . . . . . .WDN20-6 . . . . . *
96" height, 20 lines, black . .WDN20-6BL. . . . . *
120" height, 23 lines . . . . . .WDN23-6 . . . . . *

12" Stay Spacing, 330' Roll ⚠

96" height, 20 lines. . . . . .WDN20-12 . . . . . *

8" Cable Ties ⚠

8" cables are the perfect solution for many farm and ranch tasks that require connecting or attaching various materials. Great for attaching deer netting to posts.

Cable Ties, 100/pk. . . . . .DNCT8 . . . . . .3.95

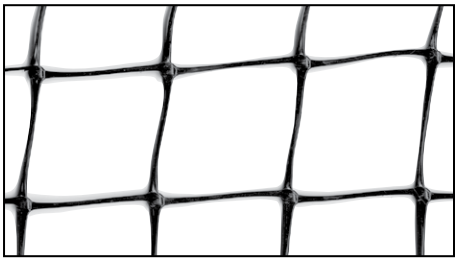

Our Deer Net is an excellent choice for keeping deer and other unwanted animals out of yards, gardens, and orchards. Much lighter and easier to install than woven wire, this netting can be installed on wood posts, fiberglass rods, or t-posts. UV-resistant polypropylene. Virtually invisible among vegetation.

- 2" x 2" openings
- Recommended 12' post spacing

Tenax Plastic Deer Netting

Made in the USA

4' x 165' . . . . . .DN4165 . . . . . .76.25
4' x 330' . . . . . .DN4330 . . . . . .142.25
6' x 165' . . . . . .DN6165 . . . . . 114.25
6' x 330' . . . . . .DN6330 . . . . . .227.25
8' x 165' . . . . . .DN8165 . . . . . .137.25
8' x 330' . . . . . .DN8330 . . . . . .274.25

Due to size and weight restrictions, 8' Deer Netting must be shipped by truck. It cannot be delivered by FedEx.

Monofilament ⚠

Monofilament is an alternative to wire that is ideal for trellis systems. This material is strong, easy to work with, and compatible with Gripple hardware.

8 ga, 500' Roll . . . . . DNC8SD. 38.75
10 ga, 600' Roll . . . . . DNC10SD. 32.75
12½ ga, 810' Roll . . . . . DNC12.5SD 29.95

⚠ California residents see page 2 for Proposition 65 Warning

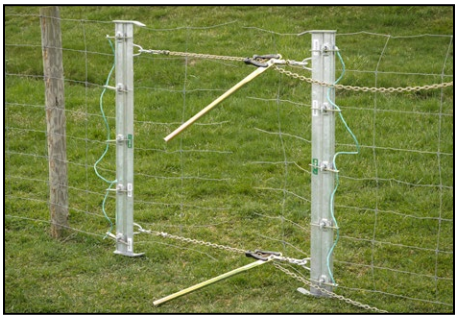

Strainrite Stretcher Bars

Strainrite stretcher bars can be used to tension most woven wire configurations. Woven wire is placed between the two-piece, press-formed steel stretcher bar and secured with wedges. Built to last with galvanized finish. Made in New Zealand.

52" Bar w/ Wedges. . . . . TSCRW52 . . . .324.75
Replacement Wedge Set . . TSCRW52W . . .39.75
60" Bar w/ Wedges. . . . . TSCRW60 . . . .384.75
Replacement Wedge Set . . TSCRW60W . . .49.75
75" Bar w/ Wedges. . . . . TSCRW75 . . . .429.75
Replacement Wedge Set . . TSCRW75W . . .59.75

Fencer's Choice® Stretcher Bar Puller

Accommodates various types of stretcher bars and has a 20' chain. The safety-latch hook attaches easily and stays secured. Electroplated for longevity.

Stretcher Bar Puller . . . . . TCSK 84.75

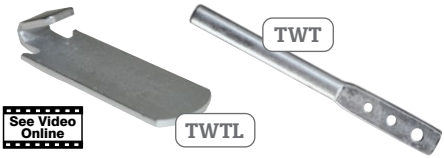

Wire-Twisting Tools

These tools make wire wrapping simple, and are especially helpful for bending preformed clips onto Poly-Droppers™. The short, flat tool is better for use in tighter spaces like woven wire.

Rod-Type Tool . . . . . TWT. 3.50
Fencer's Choice® Flat Tool . . . . . TWTL. 1.75

Fencer's Choice® Stretcher Bars

Wedges are placed vertically and staggered on the stretcher bar, making it easy to place the wire in the center of the bar. This system is especially useful when working with 2" x 4" woven wire or with 3" verticals.

4', 5 wedges. . . . . TSC4 . . . . .154.75
5', 6 wedges. . . . . TSC5 . . . . .199.75
6', 7 wedges. . . . . TSC6 . . . . .229.75
8', 9 wedges, 2-piece . . . . . TSC8 . . . . .309.75
10', 11 wedges, 2-piece . . . . . TSC10 . . . .369.75
Additional wedges. . . . . TSCW. 8.75

The Wire Twister

Attaches to your ⅜" cordless or electric drill to safely and neatly wrap wire ends on wire up to 10½ gauge. Produces professional-looking results. Use with 3" minimum woven wire spacing. Tool does not come greased. Must be greased before use.

The Wire Twister. . . . . TWTG 369.75

Woven Wire Bending Tool

Adds a tension curve in wire to eliminate sag. Made of lightweight cast aluminum.

Woven Wire Bending Tool . . . . . TBT. 12.95

Items with this symbol do not qualify for free shipping.

SMOOTH & COATED WIRE TOOLS

Strainrite Rewind Jenny ⚠

Mounts vertically to posts for easy rewinding of wire from a standing position. Winds wire tightly and neatly for convenient reuse. A quick-release rotor allows for simple coil removal when full. Holds up to 4,593' of 12½ gauge wire.

Rewind Jenny . . . . . TSJRW 499.75

KIWI® Spinning Jenny with Brake ⚠

Use to dispense smooth or coated wire with ease and features an adjustable brake to control overspin. Jenny can be placed on the ground or bolted to equipment. Three leg bases provide great stability. Hold down arms are adjustable to accommodate different coil diameters. Not for use with woven wire or Horserail. Optional rewinding hoop for TSJHH Only.

HD Spinning Jenny w/ Brake . . . . TSJHD . . 499.75
Spinning Jenny w/ Brake . . . . . TSJHH . . 119.75
Rewind Hoop . . . . . TSJRH . . . 59.95

Fencer's Choice® Non-Wheel Spinning Jenny ⚠

- 4 adjustable arms
- Pivots on ground pin
- Holds all coil sizes, including coated wire
- Some assembly required

Non-Wheel Spinning Jenny . . . . TSJA. 54.75

Easy Wire Puller ⚠

Ideal when terminating woven wire or tensioning slack strands. Works great on smooth and barbed wire. Features a rugged cast-iron jaw designed to be gentle on galvanized coating and 16" detachable pipe handle for plenty of leverage.

Easy Wire Puller . . . . . TWP 25.75

Meterman Measuring Wheel

- 19" diameter wheel
- Accurate measurements in any terrain
- Reads up to 10,000'
- Adjustable twist and lock handle

Measuring Wheel. . . . . TMW 89.75

⚠ California residents see page 2 for Proposition 65 Warning

INSTALLING WIRE TIGHTENER ON TENSION SPRING

Step 1

Step 2

Step 3

Step 4

When using the Tension Spring on corners or ends, use this plastic insulator (ICP1) to insulate hot wires. It is installed the same way as the strainer.



KIWI® Tension Spring ⚠ Made in the USA

Used for several purposes: to indicate the amount of tension on the wire, to act as a shock absorber, and to keep fence tension more uniform. When the spring is compressed to the first notch, it is under 150 lbs of tension, which is common for electric fences. Non-electric fences require more tension. When the second notch on the drawbar is exposed, there is about 250 lbs of tension on the fence. If the tension is greater, there will be problems with end, corner, bend, and dip posts pulling out of the ground. For short fences, springs allow the wire to give when needed. If you expect your fence to take a lot of abuse from falling trees or branches, tension springs on each wire are recommended. All Kencove springs have a Class 3 galvanized coating and strong drawbars.

HIGHEST STRENGTH & LONGEST LASTING SPRINGS ON THE MARKET

HD Tension Spring, 11⅞" . . . . . HTSHD. 7.45
Insulator for Spring . . . . . ICP1 . . . . . 0.75

Rapid Tightener ⚠

Makes installing EZ-Daisy Strainers fast and easy. The ½" drive ratchet speeds tightening while the notched arm holds the wire and strainer so you can easily install the pin. Fits SSDR and SSDN as well as most other brands of EZ-Daisy Strainers.

Rapid Tightener . . . . . TFDR 139.75

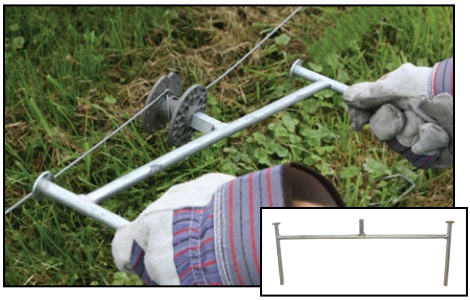

EZ-Daisy Handle ⚠

Makes it easier to tension online tighteners without needing an extra pair of hands.

EZ-Daisy Handle . . . . . TFD 7.45

KIWI® Wire Strainer ⚠ Made in the USA

The American-made original; often imitated but never duplicated. With a galvanized strap, spring clip, and zinc cog, this is a durable and long-tested strainer.

KIWI® Strainer . . . . . SAS 5.35
Save on 50 . . . . . 4.21/each

Donalds-Style Strainers ⚠

- Tension with crescent or box wrench
- Spring-steel latch
- Wider cog holds more wire and can be used with 1" Ponyrail

Galvanized strap/zinc cog . . . . . SDZ 4.75
Save on 50 . . . . . 4.45/each
Galvanized strap/alum. cog . . . . . SDA 3.05
Save on 50 . . . . . 2.75/each
Stainless strap/alum. cog . . . . . SDS 3.25
Save on 50 . . . . . 2.95/each

Hayes-Style Strainers ⚠

- Permanently hinged, flipper-type catch
- Spring clip
- Safe and easy to use

Stainless strap/zinc cog . . . . . SASS . . . 5.25
Save on 50. . . . . 4.85/each
Galvanized strap/alum. cog . . . . . SASAL . . 3.95
Save on 50. . . . . 3.65/each

WIRE STRAINER INSTALLATION

First, fasten all wires at their proper heights on the posts. Strainers should not be installed next to a rise or dip post. Install the strainer at the midpoint of the fence. If the wire is being pulled around several corners, it is best to be at the center of friction. Generally, we recommend 1 tightener per strand for every 2,600' of fence.

Put the wire through the hole in the spool until it is just out the other side. After cranking the spool nearly halfway around, pull the assembly so the wire moderately tightens. The wire should naturally bend over to the opposite side of the spool from the hole.

Wind the wire around, being careful to wind on top of the first section of wire. This will take the stress off the tight bend at the hole. Be careful as wire approaches higher tensions. Wear leather gloves, eye protection, and use the proper tightening handle. Strain wires from top to bottom for easier separation of the wires.

⚠ California residents see page 2 for Proposition 65 Warning



Strainer Handles ⚠

The Universal Strainer Handle (TFU) incorporates a spring-loaded ratchet pin and fits most common brands of permanent wire strainers such as the SRC, SDS, and SDZ. Our Hayes Handles (TFH, TFHC) are for all Hayes-Style Strainers (SAS, SASS, and SASAL). The TFHC features a rounded handle for added strength and ease of use.

Universal Handle . . . . . .TFU. . . . 14.75
Hayes-Style Handle . . . . . .TFH 4.95
Contractor-Grade Hayes Handle . . .TFHC . . . 7.25

KIWI® Online Tightener ⚠ Made in the USA

Made with a solid zinc cog and Class 3 galvanized clip. It is our strongest non-splicing wire strainer.

KIWI® Online Tightener. . . . . SSDK 3.95
Save on 50 . . . . . .3.75
EZ-Daisy Handle . . . . . TFD. 7.45

EZ-Daisy Online Tightener ⚠

This tightener is installed without having to cut the fence wire. Tighten with a ½" drive ratchet or EZ-Daisy Handle. Not for use with coated fence wire.

EZ-Daisy Tightener . . . . . .SSDN 3.15
Save on 50 . . . . . .2.95
EZ-Daisy Handle . . . . . .TFD. 7.45

KIWI® Strainer w/ Quick-End ⚠ Made in the USA

- Eliminates need for crimp sleeves
- Use with 12½ gauge wire
- Reduces stripping of coated wire
- Insert wire into Quick-End and tighten

KIWI® Strainer with Quick-End. . . .SASQ 6.15
Save on 50 . . . . . 4.89/each

Strainrite Strainers ⚠

These New Zealand favorites provide strength and tension you can trust. Choose from these beneficial features:



Rear hole design enables strainer to be threaded directly onto wire

- ***SRC*** – clip can safely be operated from outside of the bracket
- ***SRST*** – traditional ratchet and pawl design eliminates potential of mechanical failure

Clip Strainer . . . . . .SRC 5.15
Save on 50. . . . . 5.05/each
Triplex Strainer . . . . . .SRST 4.75
Save on 50. . . . . 4.65/each

Insulated Donald's Style Strainer ⚠

- Dacromet coating
- Eliminates end post insulators
- Tighten with Universal Handle (TFU)

Insulated Strainer . . . . . .SID. 4.95
Save on 50 . . . . . 4.75/each



KIWI® Class 3 Galvanized, 8 Gauge Staples ⚠

When stapling high-tensile wire, be sure to leave enough room to let the wire move freely. Use wide 2" staples for coated wire products. DB indicates double barbed.

Number of staples per pound is approximate.



1¼", 90 staples/lb	HB1	3.99/lb
1½", 66 staples/lb, DB	HBM	3.99/lb
1¾", 52 staples/lb, DB	HBS	3.99/lb
2", 48 staples/lb, DB	HB2	3.99/lb
Wide, 2", 46 staples/lb, DB	HB2W	3.99/lb
Save on 10 lb buckets	HB*-10	36.75
Save on 40 lb buckets	HB*-40	119.75

* ***Indicate staple size***

Staple Starter ⚠

Helps prevent staples from mushrooming when driving into hard wood. A few additional hits on staple may be needed to set staple to proper depth. Both starters accommodate up to 8 ga staples. TDSDW for 2" staples (HB2W).

Staple Starter, standard	TDSD	11.95
Staple Starter, wide	TDSDW	11.95

POWERED FENCE STAPLE GUNS

DEWALT Cordless Fencing Stapler ⚠

Powered by DEWALT's 20V MAX* battery, this staple gun can drive up to 590 staples per charge. Features like variable power settings, tool-free drive depth adjustment, and simple jam clearing give the operator confidence to complete the task at hand with efficiency. DEWALT 9-gauge barbed staples are available in 1¾" and 2". **Kit Includes:** two 5AH batteries, charger, and tool bag.

Fencing Stapler Kit	TTSDDKIT	849.75
1¾" Staples, 9 Gauge, 960/bkt	HCDS	95.75
Save on 2		92.75 each
2" Staples, 9 Gauge, 960/bkt	HCD2	108.75
Save on 2		105.75 each
Fencing Stapler, Gun Only	TTSDD	614.75

Milwaukee Cordless Fencing Stapler ⚠

Powered by Milwaukee's M18 REDLITHIUM™ CP3.0 battery, this staple gun can drive up to 600 staples per charge providing a 6X increase in productivity compared to manual installation. It features tool-free drive depth adjustment and simple jam clearing for ease of use. Milwaukee 9-gauge barbed staples are available in 1½", 1¾" and 2". **Kit Includes:** two 2AH batteries, charger, and tool bag.

Fencing Stapler Kit	TTSDMKIT	936.75
1.5" Staples, 9 Gauge	HCM1.5	102.75
Save on 2		97.75 each
1.75" Staples, 9 Gauge	HCM1.75	113.75
Save on 2		109.75 each
2" Staples, 9 Gauge	HCM2	116.75
Save on 2		113.75 each
Fencing Stapler, Stapler only	TTSDM	657.75

⚠ California residents see page 2 for Proposition 65 Warning

BRACING YOUR FENCE

Braces are the backbone of any fence and must be built correctly. Braces may be single or double, however the width should always be 2½ times the height of the fence. Cross members should be pipe, tubing, or round wood posts. Never use 4 x 4 or landscape timbers.

WATCH THE VIDEO

Ship Auger Drill Bit ⚠

⅜" x 13" . . . . . .TDB3813 . . . . . 11.75
¾" x 13" . . . . . .TDB3413 . . . . . 14.75

Hardwood Twist Sticks ⚠ 📦

are an economical way to tighten diagonal brace wires. Treated with ACQ or equivalent.

Twist Stick, 24" . . . . . .PTA. 1.95

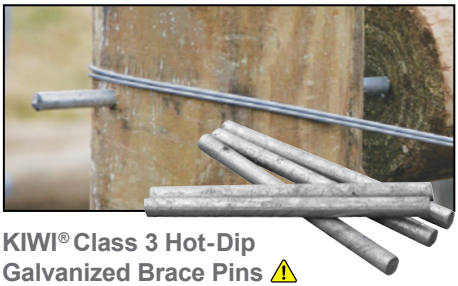

KIWI® Class 3 Hot-Dip Galvanized Brace Pins ⚠

5" x 0.35", each . . . . . H5PE. 0.41
Save on 100/box 📦 . . . . . H5PK. 31.25
10" x 0.35", each . . . . . H1PE. 0.76
Save on 100/box 📦 . . . . . H1PK. 58.75
12" x 0.35", each . . . . . H12PE. 0.93
Save on 100/box 📦 . . . . . H12PK. 70.75

Fencer's Choice® H-Brace Brackets ⚠

Simplify building H-braces. Install hangers at same distance from the ground and cut the horizontal post to tightly fit between vertical posts. Comes complete with two Dacromet-coated, heavy-gauge steel hangers, and twenty #2D drive, Dacromet-coated 1¾" screws. One pack of 10 will complete 5 H-braces.

H-Brace Bracket, 10/kit . . . .HBH10 . . . . . .42.75

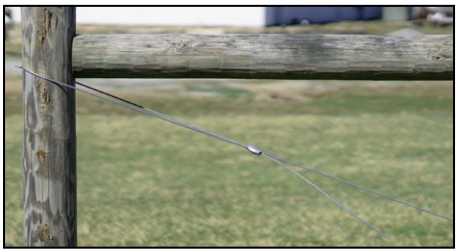

Quick-Brace ⚠

A quick and efficient way to tension any type of H-brace. Each kit includes galvanized, high-tensile steel cable with a loop at one end and a Gripple for tensioning. For maximum strength and safety, install Gripple 18"- 24" away from post.

Quick Brace, 12' brace. . . . HQBS12 . . . . . 9.75
Save on 30/box . . . . . HQBS12-30 . . 275.95
Extra Long, 16' brace . . . . . HQBS12XL. 19.50

📦 **Items with this symbol do not qualify for free shipping.**

GRIPPLE®

Gripple has been providing solutions for fence and trellis systems for decades. With a variety of products available, installing, joining, tensioning, repairing, and terminating wire is all possible with minimal effort. Whatever the project, Gripple offers a solution.

Gripple Tensioners

Small, 13-17 ga	CGS	1.45
Small, pack of 10	CGS-10-100	14.50
Medium, 10-14 ga or 15½ ga barbed	CGM	1.65
Medium, pack of 10	CGM-10-100	16.50
Large, 7½-10 ga	CGLP	1.85
Large, pack of 10	CGLP-10-120	18.50
Jumbo, 10-12½ ga	CGJ	2.05
Jumbo, pack of 10	CGJ-10-120	20.50
Barbed Wire, 12½ ga	CGB	1.65
Barbed Wire, 10/pk	CGB-10-200	16.50
Gripple 1, 11-15 ga, use at metal end posts	CG1	1.55
Gripple 1, 20/pk	CG1-20-200	31.00
Gripple Key, ea	CGKEY	1.95
Gripple Key, 2 ea, Retractable Keychain	CGKK	4.75
Gripple Twister, 100/pk	CGWT	21.75

Gripple T-Clip

- Secure wire terminations
- Simple and fast
- Ideal for woven wire

T-Clip 1, 10-14 ga, ea	CGT	1.65
T-Clip 1, 10/pk	CGT-10-200	16.50
T-Clip 2, 7½-10 ga, ea	CGT2	2.05
T-Clip 2, 10/pk	CGT2-10-120	20.50

- Use to join or tension
- No tying knots or twisting wire
- Serrated rollers grip the wire for a secure hold

Gripple Torque Tool, Contractor

Provides 10:1 mechanical advantage, long handles for leverage, quick-release cam, and Gripple Key. All metal construction ensures durability measuring 23½" overall length.

Gripple Contractor Tool . . . . . TGTC 174.75

Gripple Torque Tool

Has a 6:1 gearing system to deliver up to 800 lbs of load with minimal effort. An adjustable torque gauge controls the load applied to give consistent tension. Use with all sizes of Gripples.

Gripple Torque Tool . . . . . TGTTP 73.75

⚠ California residents see page 2 for Proposition 65 Warning

Fencer's Choice® Quick-End ⚠

Used for terminations at end posts. Use one for each wire on your fence. To install the Quick-End, drill a 7/16" hole (CWV1213, CWV1416) or a 5/8" hole (CWV811) through the end post and pull the wire through. Then put the Quick-End on the wire and tap it lightly into the hole. If final tensioning is to be done with the Quick-End, pull the wire to the end post with a chain grab, then push the slack through the Quick-End. For faster, easier tensioning, use the Gripple Torque Tool.

8-11 gauge . . . . . CWV811 . . . . . 1.78
12½ gauge . . . . . CWV1213. . . . . 1.66
14-16 gauge . . . . . CWV1416 . . . . . 1.56

Fencer's Choice® Quick-Splices ⚠

- Splice wires without a tool
- Internal spring-loaded clamps

8-11 gauge . . . . . CWL811 . . . . . 2.28
12½ gauge . . . . . CWL1213 . . . . 2.18
14-16 gauge . . . . . CWL1416 . . . . 2.09

KIWI® 304 Stainless-Steel Split-Bolt Line Taps ⚠

Standard size (CBTPSS) holds four 12½ gauge wires. Large Split-Bolt (CBTSSE) holds up to eight wires and has a 0.155" wide slot.

SS Split-Bolt, standard, each . . CBTPSS 1.65
SS Split-Bolt, large, each . . . . . CBTSSE 1.95

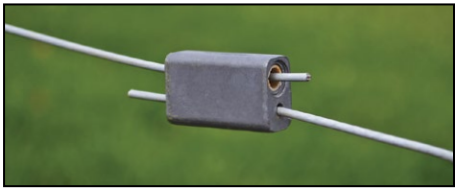

Fastlok ⚠

Holds stronger than similar 12½ gauge splicers for fast and easy inline splices. Kencove's pull testing resulted in more than 1,580 lbs of breaking strength. For additional tension, use the Gripple Torque Tool. Reusable and perfect for end and brace wires.

Fastlok . . . . . CLO 1.99
Save on 100 or more . . . . . 1.89 each

Fencer's Choice® Heavy-Duty Tension Tool ⚠

Will tension all sizes of Gripples, Fastlinks, and Fastloks. Featuring a quick-release cam, its all-metal construction is designed for heavy use and strength. Long handles provide extra leverage for high-tension applications. 10:1 geared mechanical ratio.

Heavy-Duty Tension Tool . . . TGTCC 104.75

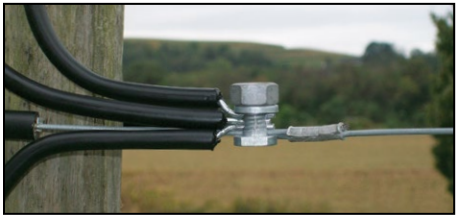

Fencer's Choice® Zinc Split-Bolt Line Taps ⚠

Split-Bolt Line Taps ensure connections are secure and highly conductive. Standard holds up to four 12½ gauge wires. Large holds up to six 12½ gauge wires.

Zinc Split-Bolt, standard . . . . . CBT 1.19

PERMANENT WIRE CONNECTIONS

KIWI® Crimp Sleeves ⚠ Made in the USA

When splicing wire, gritted crimp sleeves are used to maintain the full strength of the wire. At end posts and inline tightener brackets, use 2 sleeves. C2SS is great for electrical connections with 12½ gauge wire. The C2L gritted crimp sleeve is 70% longer than the C23 and requires at least 2 side-by-side crimps to get full strength. It can be used in place of the C23 in many applications. The C2L works well on fixed-knot and other woven wire since these fences are tightened to lower tensions. Using C2L sleeves in these applications saves money since you need 1 per splice versus 2 of the C23 size. The CT4's open side allows for installation onto existing high-tensile fence.

Uses	Item Code	Quantity	Price
KIWI® 12½ ga wire	C23	100/pk	15.75
KIWI® 12½ ga wire	C23-250	250/pk	37.75
KIWI® 12½ ga wire, long-spec sleeve	C2L	100/pk	27.75
KIWI® Aluminum, 12½ ga wire, long-spec sleeve	C2LAL	100/pk	22.75
KIWI® 12½ ga wire, long-spec sleeve	C2L-250	250/pk	59.75
KIWI® 12½ ga wire, short-spec sleeve	C2SS	100/pk	14.25
KIWI® 10½ ga smooth or 14-15½ ga barbed	C34	50/pk	19.25
KIWI® 8 ga smooth or 12½ ga barbed	C45	50/pk	24.75
KIWI® 14 or 16 ga wire	C12	100/pk	13.25
KIWI® 12½-14 ga wire, open tap	CT4PC25	25/pk	9.75
KIWI® 12½-14 ga wire, open tap	CT4	100/pk	32.75

EARTH ANCHORS

Earth Anchors

can be used to hold down posts at the bottom of ravines or to hold down a lifting brace post. Our earth anchors must have tie-down of choice added. With secure tie-down attached and anchor driven to appropriate depth, remove the drive rod and pull up on the guy wire until the anchor has turned 90-degrees at the bottom of the hole. It is in position when you are unable to pull it out by the guy wire. The rated hold is for firm soil. It may be less in soft ground.

Guy Wire ⚠

Stainless, 10.5 ga, 10'	DSC10	6.75
Stainless, 10.5 ga, 100'	DSC100	44.75
Stainless, 10.5 ga, 200'	DSC200	79.75

Earth Anchors & Drive Rods ⚠

Earth Anchor 68, 1100 lb hold	DB6	2.95
Earth Anchor 88, 3000 lb hold	DB8I	12.95
Drive Rod ½" x 3' for DB6	DB6DR	25.75
Drive Rod ¾" x 4' for DB8I	DB8IDR	41.95

⚠ California residents see page 2 for Proposition 65 Warning

Red-Handled, 4-Slot Crimp Tool ⚠

Crimps all Kencove sleeves. Long handles provide leverage to make crimping easier. Each tool is tested and adjusted prior to shipping. With proper care, these tools will last a lifetime. 20¾" length. Made in China.

Guaranteed For 5 Years

Red 4-Slot Crimp Tool . . . . . .TFFG 51.75

Nicopress® Crimp Tools Made in the USA

Heavy-duty, contractor-grade tools. The 1-slot tool is ideal for use with all 12½ gauge crimp sleeves, except open tap sleeves. The 4-slot tool will crimp all sizes of Kencove sleeves.

Nicopress 1-Slot Tool . . . . . .T1N 244.75
Nicopress 2-Slot Tool . . . . . .TNC2 . . . . . .169.75
Nicopress 4-Slot Tool . . . . . .TNC 299.75

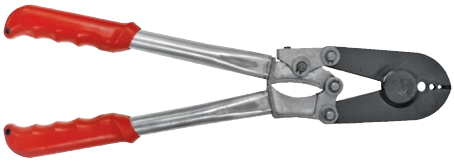

Fencer's Choice® 2-Slot Crimp Tool ⚠

Designed to cut, crimp, and strip all common fence wires. A hardened cutter is built into the nose. The small stripper hole is used for stripping coated wire and under-gate wire. The 2 crimp slots are for 12½-16 gauge (C23/C2L), and the second slot is for larger diameter smooth wire, barbed wire, and open-taps (C45/CT4). Includes crimp gauge, hex key, instructions, and 1-year warranty. Made in China.

2-Slot Crimp Tool . . . . . .TZ3 . . . . . .79.75

KIWI® EzePull 4-in-1 Fence Tool ⚠

This handy tool is perfect for building high-tensile wire fences. It crimps all 12½ gauge sleeves, cuts steel wire, and pulls staples with ease. Hardened, stainless-steel jaws and compact handles make this fencing tool strong and easy to use. Made in New Zealand.

KIWI® EzePull 4-in-1 . . . . . .TEP 229.75

Strainrite ProCrimp ⚠

The Strainrite ProCrimp is lightweight and enables single-handed, one-finger trigger operation, freeing up the operator's other hand to hold the wire. It eliminates the hard physical work of crimping by hand. Complete with power pack, charger kit, accessories, and storage case.
For use with 12½ gauge and 8 gauge wire.

Strainrite ProCrimp . . . . . TRPC 2,999.75

⚠ Items with this symbol do not qualify for free shipping.

KNIPEX

DESIGNED FOR FENCE WIRE

The TCTX is our most popular wire cutter and is specifically designed for high-tensile fence wire. The TCTXC is made with a recess in the blade that keeps wire in a better cutting position. The TCTXA, with an angled head for use in tight spaces, was built with fencing in mind. The TCTXL has longer handles to provide more leverage when cutting. Knipex cutters perform with minimum effort due to the lever-action design. Induction-hardened cutting edges and chrome-vanadium, heavy-duty steel give years of use. Made in Germany.

Knipex Wire Cutters ⚠

Knipex 71 01 200 R, 8"	TCTX	65.25
Knipex 71 01 250, 9 ⅞"	TCTXL	79.95
Knipex 71 31 200 R, 8", with recess	TCTXC	70.25
Knipex Spring Handle, with recess	TCTXS	76.75
Knipex Spring Handle, angled head	TCTXA	80.75

Knipex with recess in blade makes cutting easier by holding wire in ideal cutting position.

9" Heavy-Duty Wire Cutters ⚠

Made of alloy steel and are drop-forged for strength. Provide greater leverage, ease of use, and still fit conveniently in your pocket. Made in Japan.

9" HD Wire Cutters . . . . . TCTHD 19.75

H.K. Porter Cable Cutters ⚠

Hardened-steel blades for durability and vinyl-coated handles for a comfortable, non-slip grip. Spring loaded for ease of use. Ideal for cutting rope, twine, cable, or bungy cord. Made in China.

H.K. Porter Cable Cutters . . . TCTGC 19.95

Fencing Pliers ⚠

A wire gripper, staple puller, hammer head, soft wire cutter, and can be used to hold staples to prevent bending while driving. Made in China.

10" Fencing Pliers . . . . . TFP 9.75

Strainrite Fencing Pliers ⚠

Staple puller, hammer head, as well as wire holding, cutting, and twisting capabilities all in one tool. Made with high-strength steel.

Fencing Pliers . . . . . TFPR 35.75

Strainrite Staple Puller ⚠

Makes one-handed staple pulling easy. Use the oblong head for leverage when pulling. Features wire cutters, strippers, and a wire twisting hole.

Staple Puller . . . . . TSPR 129.75

⚠ California residents see page 2 for Proposition 65 Warning

NEW

Strainrite Wire Tension Tester ⚠

- Rugged construction
- Easy to read scale
- Calibration adjustable design

Wire Tension Tester . . . . . TWTT 139.25

Strainrite has been a trusted name in fencing since the 1970's. From the innovation of the New Zealand landscape, these tried-and-true products are built to hold up to even the toughest job. Strainrite's commitment to continuous product development has earned them recognition around the world.

NEW

Strainrite Chain Tensioner ⚠

- Contractor grade
- Smooth grip jaws

Fixed Handle . . . . . TCHRFH 139.75
Removable Handle. . . . . TCHR. 143.25

NEW

Strainrite Boundary Strainer ⚠

- Contractor grade
- Snap hook
- 19' chain

Boundary Strainer. . . . . TCSR. 199.75

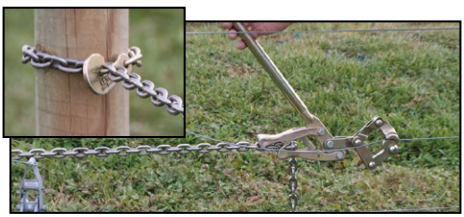

Kencove Chain Grab ⚠

Designed with a long chain, improved wire grab, and hook. Use the hook end of the chain when anchoring at an end post. Made with high-quality cast walking arms and grabs. Electroplated for longevity. Accommodates smooth and coated wire.

Kencove Chain Grab . . . . . TCHK 67.50

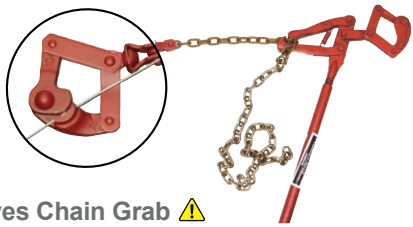

Hayes Chain Grab ⚠

- Heavy-duty chain and grab
- For use with high-tensile and barbed wire (6-16 ga)
- Does not damage galvanized coating
- 770 lb holding strength
- Made in New Zealand

Hayes Chain Grab . . . . . TCH 174.75

⚠ **Items with this symbol do not qualify for free shipping.**

CYCLOPS ENERGIZERS

CYCLOPS

NEW Made in the USA

Cyclops AC Energizers ⚠

Cyclops AC (mains) energizers are low-impedance, 110-volt plug-in energizers. These American-made units provide a longer pulse than most energizers and are fused on both the fence and power sides for maximum lightning and surge protection. Fuses are accessible from the outside of the case for easy replacement. Cyclops energizers come with a 1-year warranty from the date of purchase.

Hero, 1.5-Joule	EC1.5	154.75
Stallion, 2.5-Joule	EC2.5	198.75
Champ, 5-Joule	EC5	259.75
Brute, 8-Joule	EC8	347.75
Super, 12-Joule	EC12	524.75
Master, 20-Joule	EC20	697.74
Boss, 32-Joule	EC32	794.75

PATRIOT ENERGIZERS

PATRIOT™

Patriot AC Energizers ⚠

- AC powered, 110 volt plug-in
- Low-impedance
- Sizes for any application
- Made in New Zealand

Patriot, 0.1-Joule	TT-819957	37.75
Patriot, 0.2-Joule	TT-819958	62.75
Patriot, 0.3-Joule	TT-819959	74.75
Patriot, 0.5-Joule	TT-816863	96.75
Patriot, 1.2-Joule	TT-816864	119.75
Patriot, 2.0-Joule	TT-816865	159.75
Patriot, 3.5-Joule	TT-816867	219.75
Patriot, 6.7-Joule	TT-816869	239.75
Patriot, 13-Joule	TT-825681	397.75

Patriot DC Energizers ⚠

- DC powered, battery
- Low-impedance
- Sizes for any application
- Made in New Zealand

Patriot, 0.12-Joule	TT-820947	119.75
Patriot, 0.2-Joule	TT-819962	71.75
Patriot, 0.5-Joule	TT-818350	126.75
Patriot, 1.2-Joule	TT-818351	152.75
Patriot, 2-Joule	TT-818352	173.75

Patriot Dual-Purpose Energizers ⚠

- Powered by 110-volt plug or 12-volt battery
- Low-impedance
- Sizes for any application
- Made in New Zealand

Patriot, 0.5-Joule	TT-803401	129.75
Patriot, 1-Joule	TT-803402	164.75
Patriot, 2-Joule	TT-803403	204.75
Patriot, 3-Joule	TT-805153	247.75

KENCOVE ENERGIZERS

Kencove 1-Joule ⚠

- Pulsing power indicator
- Replaceable digital components
- Low-impedance
- 3-year warranty

1-Joule . . . . . EK1H 159.75

Kencove 4 or 9-Joule ⚠

- Pulsing power indicator
- Replaceable digital components
- Low-impedance
- 3-year warranty

4-Joule . . . . . EK4H 163.75
9-Joule . . . . . EK9H 339.75

Kencove 6 or 13-Joule ⚠

Designed and Assembled in the USA

- Produced by Power Wizard
- Diagnostic lights
- Preprogrammed for remote control
- Ultra-low impedance
- Half-power switch (13-joule only)
- 2-year warranty on energizer
- 1-year warranty on remote

6-Joule . . . . . EK6 . . . . . .214.75
6-Joule, with remote . . . . . EK6R. 319.75
13-Joule . . . . . EK13 . . . . . 349.75
13-Joule, with remote . . . . . EK13R 449.75

Kencove 24-Joule ⚠

Designed and Assembled in the USA

- Produced by Power Wizard
- Fence voltage indicator lights
- Preprogrammed for remote control
- Ultra-low impedance
- 2-year warranty on energizer
- 1-year warranty on remote

24-Joule . . . . . EK24 . . . . . .499.75
24-Joule, with remote . . . . . EK24R. 599.75

Kencove Remote & Fault Finder ⚠

Designed and Assembled in the USA

Turn your energizer on and off from anywhere along the fence line. This remote is also a digital voltmeter and amp meter. Use with Kencove by Power Wizard preprogrammed energizers. 1-year warranty.

Remote Control . . . VPAR 112.95

Kencove Dual-Purpose Energizers ⚠

Designed and Assembled in the USA

These low-impedance energizers by Power Wizard operate on a 110-volt electric plug or a 12-volt battery. With 1 or 3-joule output, they work great on small to mid-size pastures and rotational systems. Feature full-power and half-power settings to save battery life and LED indicator lights to show voltage and battery conditions. 2-year warranty covers lightning damage. Include AC-adapter and battery leads.

1-Joule, dual-purpose. . . . . .EKD1. . . . . 133.75
3-Joule, dual-purpose . . . . . .EKD3. . . . . 209.75

⚠ California residents see page 2 for Proposition 65 Warning

SPEEDRITE ENERGIZERS

Speedrite™

Speedrite Dual-Purpose Unigizers™ ⚠

Operate on a 110-volt electric plug or a 12-volt battery. The day/night sensor and adjustable pulse speeds round out the many advantages of these energizers.

Battery lead set and mains power adapter included.

- Day/night sensor
- Adjustable pulse speeds
- 6, 12, and 18-joule units preprogrammed for remote control
- Made in New Zealand
- 3-year warranty

Speedrite 1000, 1-joule . . . . . EXD1 . . . . . 152.75
Speedrite 2000, 2-joule . . . . . EXD2 . . . . . 226.75
Speedrite 3000, 3-joule . . . . . EXD3 . . . . . 254.75
Speedrite 6000, 6-joule . . . . . EXD6 . . . . . 407.75
***Speedrite 6000 unit will not work with VPXR**
6000i, 6-joule w/ remote . . . . EXD6R 622.75
12000i, 12-joule . . . . . EXD12. . . . . 779.75
12000i, 12-joule w/ remote . . EXD12R. . . 997.75
18000i, 18-joule . . . . . EXD18. . . . . 879.75
18000i, 18-joule w/ remote . . EXD18R . . 1,099.75

Important Notice

Kencove Farm Fence Supplies will no longer be offering energizer repair services.

* For more details on this closure and where you can have your energizer repaired, call 1-800-KENCOVE

Speedrite Mains Energizers ⚠

These energizers, with advanced electrical engineering, provide exceptional performance for long-term livestock safety and security. Practical design features include large terminals and a highly-visible voltage display. 3-year warranty.

46000W, 46-joule . . . . . EX46 . . . 1,629.75
46000W, 46-joule w/ remote . . . EX46R. . 1,839.75

86000W, 86-joule w/ remote . . . EX86R . . 2,569.75
***The 83-joule energizer requires a 220/240-volt power source.**

Speedrite Remote & Fault Finder ⚠

The Speedrite Fence Remote is a voltage tester, fault finder, and remote control. It provides the convenience of troubleshooting your fence while being able to turn the energizer on and off from anywhere along the fence line. This remote helps you find the location of faults by providing instant feedback on fence voltage and current. Works with Speedrite preprogrammed energizers. 1-year warranty.

Remote with Fault Finder . . . VPXR 232.75

⚠ California residents see page 2 for Proposition 65 Warning

SOLAR & BATTERY ENERGIZERS

Kencove Portable Solar Energizers ⚠

- On/off switch with pulsing power indicator
- Mount to t-posts or wood posts
- Include fence and ground cables
- Low-impedance

3-year warranty includes lightning damage.

Solar Energizer, 0.25-joule . . . . EKS.25 . . . 191.75
Solar Energizer, 0.50-joule . . . . EKS.5H . . . 297.95

Patriot Solar Energizers ⚠

- Solar powered
- Flashing indicator light
- Easy to mount, install
- Rechargeable, internal battery
- Made in New Zealand
- 3-year warranty

Patriot PS5 Solar, 4V . . . . . TT-817369 . . 126.75
Patriot SolarGuard, 6V. . . . . TT-834373 . . 159.75
Patriot SolarGuard, 12V. . . . TT-819953 . . 199.75

Power Wizard Strip Grazer ⚠ Designed and Assembled in the USA

- 0.35-joule output
- Operates from D-cell batteries or external 12-volt battery
- Mounts directly to ground rod, t-post, or hangs from fence wire
- 2-year warranty

Power Wizard Strip Grazer. . . EAK 99.75

Speedrite AN90 Energizer ⚠

- 2 pulse speed options
- 0.12-joule output
- Powered by 4 D-cell batteries or external 12-volt battery
- 3-year warranty

Speedrite AN90 . . . . . .EAN 91.75
Speedrite AN90, with stake . . . . .EANS 111.75

Parmak Magnum Solar Energizer ⚠ Made in the USA

- Voltage meter
- Durable steel case
- Includes battery
- 1-year warranty

The Parmak Magnum Solar Energizer comes complete with a battery and solar panel. The solar panel charges the battery and eliminates the need for recharging. Built-in performance meter.

Parmak 12V, 0.5-joule . . . . . .EMS 329.75
Replacement Battery, 12V . . . . . .MB12 . . . . 99.75
Parmak 6V, 0.25-joule . . . . . .EM6S . . . 229.75
Replacement Battery, 6V . . . . . .MB6 . . . . . 49.95

Speedrite Portable Solar Energizer ⚠

- Low-impedance
- Mounts to t-posts or wood posts
- Includes 12-volt rechargeable battery
- 3-year warranty

Operates up to 3 weeks with no sun.

Speedrite S500, 0.5-Joule . . . . EXS.5 . . . 264.75
Speedrite S1000, 1-Joule. . . . . EXS1 . . . . 369.75

Cyclops Hero Solar Energizer ⚠ Made in the USA

The Cyclops Solar Hero is a solar-powered energizer. With .75 output joules the Solar Hero can power .75 miles of fence.

The Cyclops Solar Hero is an all-in-one, low-impedance, solar energizer with built-in lightning protection. The Solar Hero features an internal battery and a 5-watt solar panel. Cyclops energizers come with a 1-year warranty from the date of purchase.

Hero Solar, 0.75-Joule . . . . . ECS.75 . . . . 329.75

Items with this symbol do not qualify for free shipping.

Solar Dolly ⚠ Made in the USA



This helpful dolly is perfect for portable fences like electric netting. Designed to hold all of your solar-powered electric fence components including energizer, battery, solar panel, and charge controller.

A must-have for hard to power areas. The ideal size and portability of this American-made unit enables fences to be electrified just about anywhere. Includes a compass for proper orientation of your panel. Energizer, solar panel, and voltage controller sold separately.

Solar Dolly . . . . . MSD 179.95

Battery Cable ⚠ Made in the USA

Use the 2 convenient clips and pre-exposed wires to connect your solar charge controller to an energizer battery. Follow the controller manufacturer's instructions for proper installation.

24" Battery Cable. . . . . .MPBC24 . . . . . .5.95
6' Battery Cable . . . . . .MPBC6 . . . . . .14.95

MSC10LVD

MSC10LVDW

Solar Charge Controller ⚠

Regulate the current from the solar panel to prevent the battery from overcharging. Our controllers feature a low-voltage disconnect (LVD) which switches off the supply to the load if the battery voltage falls below the cut-off voltage. The MSC10LVDW is waterproof for excellent performance in any weather. Both controllers work with up to 100-watt panels and include a 1-year manufacturer's warranty.

- LVD will disengage the system if it reaches 11.1 volts and re-engage when the battery is charged to 13.4 volts
- Remember a new battery is not always charged to 13.4 volts
- Use a multi-meter to test battery voltage before installing

10 amp . . . . . .MSC10LVD 19.75
10 amp, waterproof . . . .MSC10LVDW. 25.75
20 amp . . . . . .MSC20LVD 29.75

Portable Solar Kit ⚠

100 watts of power in a rugged, hinged, aluminum frame that folds in half to fit into a handy carrying case. Capable of powering up to a 9-joule energizer, a small water pump, or lighting, this unit comes equipped with a 10-amp solar controller, battery cables, and carrying case. Position the panel due south and the foldable legs will automatically orient the panel at 45°. Battery not included.

1-year manufacturer's warranty on the solar panel and 1-year warranty on the solar controller.

Portable Solar Kit. . . . . MSP100KP 299.95

⚠ California residents see page 2 for Proposition 65 Warning

CHOOSING A SOLAR PANEL

Your solar panel should match the size of your fence. For each joule of output, allow 7 watts of solar panel for high-sunlight areas and 10 watts in low-sunlight areas. Example: 3-joule energizer = 30-watt solar panel.

STEP 1

Calculate what your energizer needs to run for a day (load). This example is for a 3-joule energizer.

How to Calculate the Ah-per-day needed:

Volts x Amps = Watts
12 volts x 0.29 amps = 3.48 watts
Wh = 3.48 W x 24 hours = 83.52Wh

Determine Amperage Hours:

Ah = Wh/V
Ah = 83.52Wh/12V = 6.96Ah per day

STEP 2

Find out how much sunlight you get in your location.

Solar insolation map for peak sunlight hours:

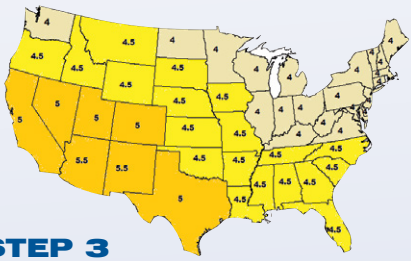

STEP 3

Calculate which solar panel will provide the Ah-per-day you need.
Divide Ah from Step 1 by the number of Peak Sun Hours per day.
6.96Ah/3.68Hr = 1.89A
This means that you need a panel which produces 1.9A.

Determine panel size:

A = Watt/Volt
Watt = Volt x Amp
_____= 12V x 1.9A
= 22.8 watts (always add 20% to account for real world conditions)
= 27.36 watts (round up) = 30-watt panel

Solar Panels ⚠

Improvements in efficiency and lower costs have made powering your fence with solar affordable and easy. Simply match the size of the solar panel with the energizer. Our solar panels have a rugged aluminum frame, polycrystalline panel, and approximately 18" cable. 5-year manufacturer's warranty.

- You need 10 watts for every 1 output joule of your energizer. Up to 20 watts per joule is sometimes used in northeast USA.
- Solar panels should always face south.
- Use a deep-cycle type battery. The best values can be found locally.

Solar Panel, 10-watt . . . . . MSP10P 36.99
Solar Panel, 20-watt . . . . . MSP20P 72.95
Solar Panel, 30-watt . . . . . MSP30P 84.95
Solar Panel, 40-watt . . . . . MSP40P . . . 109.95

MSP10-20MB

MSP10-40MB

Panel Mounting Brackets ⚠ Made in the USA

- Made in the USA of high-grade aluminum and stainless-steel
- Include hardware to mount on wood posts
- Can be mounted to metal pipe or t-posts using U-bolts (not included)
- Pre-drilled to accommodate a charge controller

The 1-piece bracket (MSP10-20MB) is pre-bent to a 30° angle and is designed to accommodate 10-20-watt solar panels. The 2-piece bracket (MSP10-40MB) can be set from a 15° to 90° angle and is designed to hold up to 40-watt solar panels.

Bracket, 10-20W panels . .MSP10-20MB . 24.95
Bracket, 10-40W panels . .MSP10-40MB . .89.75

Fencer's Choice® Swivel Cut-Out Switch ⚠

- Stainless-steel knife and contacts
- Contacts protected from adverse weather
- Spring-tightened

Swivel Cut-Out Switch . . . . . MCP 7.25

Heavy-Duty, Single-Throw Cut-Out Switch ⚠

- 2 sets of stainless contacts
- Stainless-steel knife

Pivot bolt for knife is not an electrical contact, which allows easier movement of the knife.

MCCHD 7.25

Fencer's Choice® Heavy-Duty, Double Cut-Out Switch ⚠

Combines the advantages of the split-bolt tap's easy hook-up with contacts that are independent of the knife pivot. This can easily be changed to a double-throw switch.

Cut-Out Switch . . . . . MCDHD 7.25

FENCE-FLAG® w/ K-CLIP® ⚠

- Increases visibility of line wires
- Flutters with slightest breeze
- Suspended on stainless K-CLIP

FENCE-FLAGS, 12/pk. . . . MFF . . .6.95

K-CLIP® ⚠

- Quick and easy to install
- Stainless-steel spring temper
- Securely hang warning signs

K-CLIPS only, 50/pk . . . . . MFC 8.75

Fencer's Choice® Power Connectors ⚠

Connect power from an existing electric fence to a new fence section, electric twine, or portable electric netting.

2-Clip Jumper, 4' wire, red	MPC	. . . .4.75
2-Clip Jumper, 4' wire, green	MPCG	. . . .4.75
2-Clip Jumper, 4' wire, yellow. . . .	MPCY	. . . .4.95
Clip only, red.	MPCCR	. . .1.85
Triple-Jumper Leads	MPC3	. . . .9.75
Clip w/ 4' Insulated Wire, red	MPCT	. . . .3.95
Clip w/ 4' Insul. Wire, green	MPCTG	. . .3.95
Jumper Lead, 4' wire, black	MPCAB*	. .3.95
Jumper Lead, 4' wire, red.	MPCAR*	. .3.95
Jumper Lead, 4' wire, green.	MPCAG*	. .3.95

**** Does not work with Speedrite energizers.***

Kencove Warning Sign ⚠

- Printed on both sides
- 6 holes for hanging or nailing
- 7¾" x 4¾"

Kencove Warning Sign . . . . . .MFSP. 2.45

Kencove Aluminum Warning Sign ⚠

Unique notching system secures sign onto any fence wire. Printed on both sides. 12" x 4".

Kencove Aluminum Sign. . . . . .MFSK 4.95

Kencove Clip-On Warning Sign ⚠

- Printed on both sides
- 5 holes for nailing
- 2 wire clips
- 9¾" x 4¼"

Kencove Warning Sign . . . . . .MFSD 1.95

⚠ California residents see page 2 for Proposition 65 Warning

Grounding Kits ⚠

- 3 galvanized ground rods (½" x 5' or ⅝" x 6')
- 3 ground rod clamps
- 50' of stainless wire

5' Grounding Kit . . . . . .MGK5 . . . . . .55.95
6' Grounding Kit . . . . . .MGK6 . . . . . .62.95



Ground Rod Clamps ⚠

Brass, ½" . . . . . .MGCB2. . . . . .3.15
Brass, ⅝" . . . . . .MGCB5. . . . . .2.49
Brass, ¾" . . . . . .MGCB3. . . . . .3.95
Universal, ¼"-1¼" . . . . . .MGCU 3.25

Fencer's Choice® Ground Rods ⚠

Hot-dip galvanized ground rods

½" diameter x 3' . . . . . .MG3. . . . . .7.25
½" diameter x 5' . . . . . .MG5. . . . . .13.75
½" diameter x 6' . . . . . .MG6. . . . . .16.25

KIWI® Ground Rods ⚠

Heavy-duty ⅝" hot-dip galvanized ground rods

⅝" diameter x 5' . . . . . .MG5HD 14.75
⅝" diameter x 6' . . . . . .MG6HD 17.75
⅝" diameter x 94" . . . . . .MG8HD 16.25

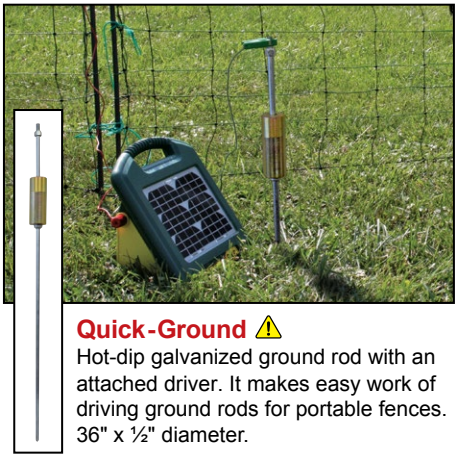

Quick-Ground ⚠

Hot-dip galvanized ground rod with an attached driver. It makes easy work of driving ground rods for portable fences. 36" x ½" diameter.

Quick-Ground, 36" . . . . . MGQ 31.75

Ground Wire ⚠

Copper, 6 gauge. . . . . MGWFT. . . . 0.89/ft
Stainless, 10½ gauge, 50' . . . DSC50. . . . . .24.75

UNDERGROUND WIRE

Ideal as under-gate or lead-out, this UV-stabilized, polyethylene-coated, 12½ gauge wire lasts longer and conducts better than 16 gauge. Rated for 20,000 volts. The use of household electrical wire is not recommended for use with fence chargers due to low voltage ratings.



KIWI® 12½ Gauge, Double-Insulated Wire (0.34" dia) ⚠ Made in the USA

50'. . . . . .GU50 . . . . . .13.25
100'. . . . . .GU100 . . . . . .26.75
100', white . . . . . .GU100W 28.75
250'. . . . . .GU250 . . . . . .64.75
500'. . . . . .GU500 . . . . . .132.75
1,000' . . . . . .GU1000 . . . . . .289.75

KIWI® Insultube ⚠ Made in the USA

Put 12½ gauge wire through the tube to run electric wire under gates. Can be used for insulating jumper wires. 0.16" I.D. and 0.36" O.D.

Not recommended for insulating corner posts. Use wraparounds.

50' coil . . . . . G05 . . . . . .12.25
100' coil . . . . . G10 . . . . . .23.75
250' coil . . . . . G25 . . . . . .57.75
500' coil . . . . . G50 . . . . . .114.75

Items with this symbol do not qualify for free shipping.

FAULT FINDERS & VOLTMETERS

Pakton Fault Finder and Voltmeter ⚠

Features a digital readout display to show electric fence voltage, current, and the direction of the fault. No wires or clips eliminates tangles and risk of shock. Simple, one-touch operation. One-year warranty.

- Saves time by quickly leading you to the fault
- Use with any low-impedance energizer

Fault Finder and Voltmeter . . . . VPK 105.75

Kecove Digital Voltmeter and 12-Volt Battery Tester ⚠

Can test the voltage on your fence or 12-volt battery with ease. Features a ground probe with 4' cord for testing fence. Positive and negative battery tester probes with 2' cords connect easily.

- Measures up to 12,000 volts
- Easy-to-read LCD display
- Includes battery
- One-year warranty

Digital Voltmeter/Battery Tester . . . VSXK . . . 35.75

Kencove 5-Light Tester ⚠

Our 5-Light Tester is easy to use. Check the voltage on your fence line by inserting the pin into ground, then touching the probe to the wire. Voltage level is shown with indicator lights. Measures up to 8,000 volts.

5-Light Tester . . . . . V5L 10.75

Speedrite Fault Finder ⚠

Digital readout displays fence voltage, amperage flow, and even the direction of the current. No wires are needed. It features a large backlit screen, beeper, and memory of last reading. Use only with a low-impedance energizer.

Speedrite Fault Finder . . . . . VPX 108.75

Speedrite Fence Alert™ ⚠

Emits a bright red light as soon as low or intermittent voltage is detected on the fence line. The water-resistant case is designed to withstand extensive periods in the outdoors.

- No ground wires or external power source required
- Works with all pulse energizers
- Clip accommodates 8 to 16 gauge wire

Speedrite Fence Alert. . . . . MFA 28.75

Kencove Wireless 5-Light Tester ⚠

Measures the approximate voltage from any position on the fence line and the output voltage directly from the energizer. Features bright LED lights, and there are no extra wires or ground probes needed. Simply touch the top of the tester to the electrified fence or energizer fence terminal and push the tester button. Measures from 2,000 volts to 10,000 volts.

Wireless LED Tester . . . . . VT5LW 13.95

Strainrite Fence Light ⚠

Gain peace of mind in a flash! Strainrite Fence Light indicates the strength of your electric fence at any given time.

Strainrite Fence Light . . . . . MRFF 25.75

⚠ California residents see page 2 for Proposition 65 Warning

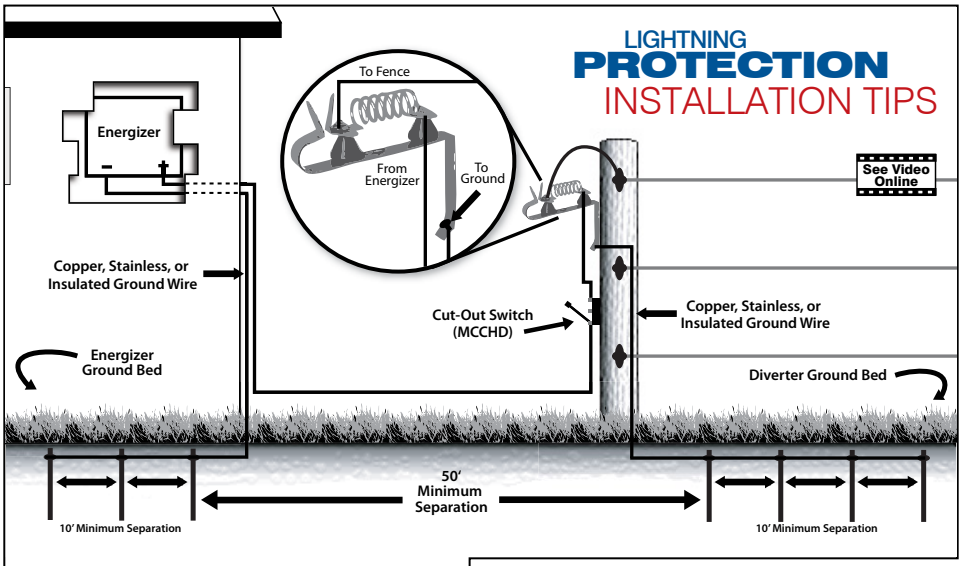

- Install diverter close to energizer (minimum 50' between beds).
- Keep ground bed away from water pipes, especially those going to drinking areas or buildings where the electric charge may affect livestock or people.
- Install ground rods in an area of high moisture.

Pakton Stop-Click Lightning Diverter ⚠

This premium lightning diverter protects your energizer from lightning surges coming from fence. Surges greater than 3,000 amps will damage internal coils and require replacement. It also reduces electrical interference (clicking) caused by your energizer. Individual ground preferable.

Stop-Click Lightning Diverter . . . MSC 94.75

KIWI® Choke Coil and Lightning Diverter Combination ⚠



Combines the two essential components of a lightning diverter. The choke coil is used to slow the surge of electrical energy by inductive forces created in the coil. The pool of energy searching for the ground jumps the gap in the arrestor and finds the fastest route to the ground. The arrestor features an adjustable gap. To use it properly, set the gap to the smallest distance possible without the charger causing an arc in the gap. To install, attach to a post between the fence wire and the cut-out switch.

KIWI® Choke Coil/Diverter . . . . MWLA 8.25

Power-Surge Protector ⚠

Helps protect your energizer from electrical surges or spikes coming from your main power source. Provides up to 1,080 joules of protection. Status indicator lights for easily monitoring.

Power-Surge Protector. . . . MPS 19.95
Fuse, 1 amp . . . . . AGC1 . . . . . 1.25

KIWI® Energy Limiter/ Flood Gate Controller ⚠

Automatically reduces power to the bottom wire when vegetation grows too high.

Flood Gate Controller . . . . . MEL. 54.75

⚠ **Items with this symbol do not qualify for free shipping.**

WOOD POST INSULATORS

KIWI® Double-U Insulators ⚠

Used on end and corner posts. The electrified wires go on the inside of the corner posts. They work best when crimp sleeves are installed in the wire loop to bring the wire together near the insulators. Metal is embedded in the plastic to keep the wire from cutting through.

KIWI® Double-U, 10/pk . . . . . I46 . . . . . 8.25

Reinforced Bull-Nose Insulator ⚠

- Fiberglass reinforced for added strength
- Ideal for any end or corner application
- Can be used with high-tensile wire

Reinforced, white . . . . . I4UW 0.99
Reinforced, black . . . . . I4UB 0.99

Heavy-Duty Lag-Corner Insulator ⚠

Ideal for high-tensile wire, coated wire, or any application where additional strength is required.

- L-shaped, ⅜" diameter, zinc-plated lag screw with nylon lock nut
- UV-stabilized, high-grade plastic

Lag-Corner Insulator, white . . . . . ILCW 2.35
Lag-Corner Insulator, black . . . . . ILC 2.35

KIWI® Wraparound Insulator ⚠ Made in the USA

Wraparounds are an easy and effective way to terminate at end posts and change directions at corners and bends while fully insulating conductive strands.

20", black, 10/pk. . . . . I40 . . . . . 8.75
24", black, 10/pk. . . . . I40-24 . . . . . 9.95
30", black, 10/pk. . . . . I40-30 . . . . . 12.75
100' coil, black . . . . . I40-100 . . . . . 46.75

Strainrite Activator Strap Insulator ⚠

The Activator Strap is a new breed of end post termination that eliminates unnecessary hardware. The Activator Strap is a versatile connection point for multiple gate handles while doubling as a termination insulator.

Activator Strap, 10/pk . . . . . IPSR 39.75

Secure Lag-Screw Insulator ⚠

Eliminates electrical shorts and is fully reinforced with 5/16" diameter, zinc-plated steel. Made with long-lasting, UV-stable, polyamide plastic, and can be quickly installed.

- Eliminates electrical shorts
- Accommodates twine, rope, and wire products

Secure Lag-Screw Insulator . . . . ILCS 2.35

Lag-Corner Insulator ⚠

- Ideal for electric rope and twine
- L-shaped, ¼" diameter lag screw

Lag-Corner, white . . . . . ILCEW 1.15
Lag-Corner, black . . . . . ILCE 1.15

⚠ California residents see page 2 for Proposition 65 Warning

Fencer's Choce® Spiralator

A revolution in tube insulators. Unlike a normal fin-tube, which you must put on before tensioning the wire, the Spiralator is put on after the wire is tensioned. A quick twist of the wrist and it snaps onto the wire. Comes in 4" and 6" lengths, complete with staples, or 500-piece bulk box. Also available in 50' coils (I5S-50), which are excellent when diagonal brace wires are too close to hot wires.

4", 100/pk, w/ staples . . . . . I5S 34.75
6", 50/pk, w/ staples . . . . . I5S-6 . . . . . .32.75
4", 500/pk, w/o staples . . . . I5SBK500 . . . .99.75
50' coil, w/o staples . . . . . I5S-50 . . . . . .29.75

Donut Insulator

A set of donuts bolted between strips can be tied to an anchor in a sharp dip to eliminate a dip post. ***Do not use Porcelain Donut in high-tension applications.***

Porcelain Donut . . . . . IPD 0.49
Plastic Donut, white . . . . . ILDW. 0.79
Plastic Donut, black . . . . . ILD 0.79

Pigtail Insulator

- 10" offset
- Galvanized high-tensile wire
- Long-life, UV-stabilized polymer coating

Pigtail Offset Insulator, 25/pk . . . . I9Z 57.75

WOOD POST INSULATORS

KIWI® 4" Flat-Back Tube Insulator

- High-quality plastic
- Ideal for square posts
- Economical and easy to use

4" Flat-Back, 200/pk . . . . . .I53 . . . . . .15.75
6" Flat-Back, 200/pk . . . . . .I53-6 . . . . . .24.95
8" Flat-Back, 25/pk . . . . . .I53-8 . . . . . .4.25

Fencer's Choce® Heavy-Wall Tube Insulator

- Extra protection from shorts
- Less inline friction
- 0.23" I.D., 0.55" O.D.
- Use 6" lengths for line and bend posts

Heavy-Wall Tube, 24", 10/pk . . I48 . . . . . .9.25
Heavy-Wall Tube, 100'. . . . . I48-100 . . . .46.95
6" Heavy-Wall Tube, 50/pk . . . I48-6PK50. . .10.95

KIWI® Fin-Tube Insulator

Staple anchors into the fins on the tube to prevent sliding. UV-stabilized to resist weathering.

4", 2-flange, 200/pk . . . . . I50. . . . . .14.25

Gooseneck Ring Insulator

Holds an electric wire 7½" away from a wood post. The design allows the weight of the wire to rest on top of the bent rod to give better strength and electrical insulation. Total length: 9¼".

Gooseneck, 10/pk . . . . . IWR6 . . . . . 9.95

WOOD POST INSULATORS



Ring Insulator ⚠

Made with a heavy screw as its base and a continuous, steel-reinforced ring, this insulator has the strength to hold in old locust posts or in the soft wood of old telephone poles.

3", white, 25/pk. . . . . IRI2W 6.75
3", black, 25/pk. . . . . IRI2. . . . . 6.75
6", offset, white . . . . . IRI6W 1.09
6", offset, black . . . . . IRI6. . . . . 1.09

Ring Insulator Installation Tool ⚠

Attach to a low-speed drill to install screw-in insulators in seconds

Cannot be used with IWR6.

Installation Tool . . . . . TIRI 5.25

Strainrite Mega Claw Insulator ⚠

A great choice for wood post applications. Heavy-duty, wide claws will hold material up to 5/16" diameter. With braced webbing and UV-stabilized polymers, these insulators are built to last and come with a 12-year guarantee.

Mega Claw, black, 200/pk. . . . .IMCRB 86.75
Mega Claw, white, 200/pk. . . . .IMCRW . . . 86.75

Speedrite Insulators ⚠

- Large spark flange
- Attach with nails, screws, and staples
- High-quality UV-resistant plastic

For use with wood posts. Does not accommodate coated wire.

Pin-Lock Insulator, black, 25/pk . . . IPL 13.75
Claw Insulator, black, 25/pk. . . . . ICW. . . . 15.75

KIWI® Pin-Lock Insulator ⚠ Made in the USA

- Large spark flange around the base
- High-quality, UV-resistant plastic
- Removable pin
- Versatile pin-lock insulators work with high-tensile, rope, and coated wire

Pin-Lock Insulator, white, 25/pk . . . . I8PW . . . 8.25
Save on 25 packs 7.75
Pin-Lock Insulator, black, 25/pk . . . . I8P. 8.25
Save on 25 packs 7.75

Claw Insulator ⚠ Made in the USA

- UV-stabilized, heavy-duty plastic
- Extremely versatile
- Can be used with high-tensile, coated wire, electric rope, ribbon, or twine

Claw Insulator, white, 25/pk . . . . .ICCW 8.25
Claw Insulator, black, 25/pk . . . . .ICCB. 8.25

Speedrite Claw Insulator (ICW) for use with high-tensile only. Does not accommodate coated wire.

1¾" Stainless-Steel Wood Screws ⚠

Square head wood screws are ideal for attaching insulators to wood posts. The 1,250-piece bucket includes 2 free drive bits (TDBS).

1¾" SS Screws, 50/pk. . . . . .HSS175 . . . . 3.75
1¾" SS Screws, 1,250/bkt. . . . .HSS175B . . 87.75
Square Head Drive Bit, 2/pk . . . TDBS 1.75

⚠ California residents see page 2 for Proposition 65 Warning

2" Backside T-Post Insulator ⚠ Made in the USA

Holds rope, twine, and wire 2" from the post. It slides over the top of standard t-posts for easy 2-pin installation. This insulator is made from heavy-duty, UV-stabilized plastic and features a spark flange to prevent arcing.

2" Backside Insulator, black, 25/pk . . ITB2 . 11.25

Did you know

Poor or broken insulators are often the source of energy leaks. Kencove insulators are UV-stabilized, meaning the sunlight will not deteriorate the plastic causing it to crack or break. Once an insulator cracks or breaks, the energy leaks through making direct contact with the posts. This results in a voltage drop on the fence line.

Speedrite Wood/T-Post Pin-Lock Insulator ⚠

Nail to wood posts or snap onto steel t-posts.

- Self-locking pin
- UV-stabilized plastic

For use with smooth wire only.

Speedrite Pin-Lock, 25/pk . . . . . .IPTL . . .11.95

T-Post Claw Insulator ⚠ Made in the USA

Secures to t-post with wraparound, 3-point contact. Ideal for large diameter products like rope and Hotcote®. Works with most sizes of t-posts including 1.25lb and 1.33lb. Made of high-density polyethylene.

White, 25/pk . . . . . .IRTCW 7.25
Black, 25/pk . . . . . .IRTC. 7.25

Capper Insulator ⚠

Designed to either nail onto the top of wood posts or fit onto steel t-posts. It will hold wire, rope, and up to 1.6" wide ribbon and tape. This insulator also adds safety and visibility.

Capper Insulator, white, 10/pk . . . .ITPCW . . 11.99
Capper Insulator, black, 10/pk. . . .ITPCB. . . 11.99

KIWI® T-Post Pin-Lock Insulator ⚠ Made in the USA

Made with heavy-duty, UV-resistant plastic. This is our most durable t-post insulator. Spark flange prevents arcing. Fits most sizes of t-posts and holds rope, twine, or smooth & coated wire. Easy to install by simply sliding over the top of the t-post and securing with pin.

T-Post Insulator, white, 25/pk . . . . ITDW . . . 6.75
T-Post Insulator, black, 25/pk . . . . ITDB. . . . 6.75

FREE SHIPPING
On Qualified Orders of $99 and More

Pin-Lock Insulator ⚠ Made in the USA

Holds larger diameter fence products such as Hotcote® or electric rope. Simply nail onto wood posts or snap onto t-posts to securely insulate electric wires. UV-stabilized plastic resists weathering.

Pin-Lock Insulator, white, 25/pk. . . . ITEW. . . 6.75
Pin-Lock Insulator, black, 25/pk . . . ITE 6.75

Items with this symbol do not qualify for free shipping.

T-POST INSULATORS

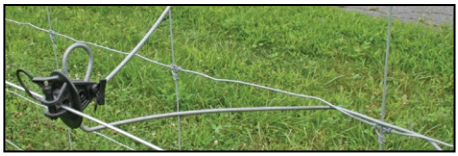

12" Offset Bracket ⚠

- Easy to attach with a screw driver onto 2 separate lines of fence wire
- Great insulation from the bracket wire

Offset Bracket, 25/pk . . . . . I6X. 54.95

Dare Tube Post Insulator ⚠ Made in the USA

Can be used with chain-link, tube gates, corral panels, or up to 2" tubing. Holds twine, wire, and up to ¼" diameter rope. Galvanized hardware included. Fits vertically or horizontally.

Dare Tube Post Insulator, 10/pk . . .IMP35. . 10.75

Strainrite Outrigger Pinlock Insulator ⚠

Easily attaches to and prolongs the life of existing fence and reduces pressure on fences by adding an electrified offset strand.

Outrigger Pinlock, 50/pk . . . . IORBPL. . . . 138.25

Dare Snug T-Post Insulator ⚠ Made in the USA

- Secures with 3-point contact
- Holds wire 1" from post
- UV-resistant polyethylene
- Fits 1.25 lb/ft to 1.31 lb/ft t-posts

Snug T-Post Ins, yellow, 25/pk . . . . IS1. . . . .5.45
Snug T-Post Ins, black, 25/pk . . . . . IS1B . . .5.45

5½" Offset T-Post Insulator ⚠ Made in the USA

- Pin-lock holds rope, twine, or wire
- Fits most sizes of t-posts

Easy to install. Simply slide over t-post and secure with pin.

5½" Offset, white, 10/pk . . . . . IT6W 9.45
5½" Offset, black, 10/pk . . . . . IT6B. 9.45

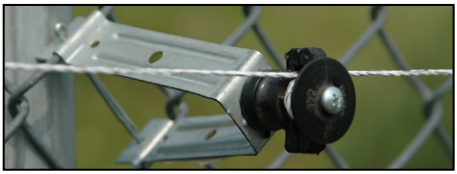

Dare Chain Link T-Post Insulator ⚠ Made in the USA

Supports electrified wire 4½" away from the fence. Can also be used on t-posts.

Chain Link Offset, 10/pk . . .ICLOFFSET 8.25

Rod Post Insulator ⚠ Made in the USA

Economical and convenient to use. If you want to drive a vehicle over a temporary fence, just loosen the plastic screws and slide the insulators and wires to the bottoms of the posts. Accommodates up to ¼" diameter rope and up to ½" fiberglass rod.

Red Snap'r Insulator, yellow, 25/pk . . IRPY . . 2.95

Fiberglass Offset Insulator ⚠ Made in the USA

½" Stainless-Steel Clip . . . . . .F2S. 0.75
Spring clip required to support wire.

⚠ California residents see page 2 for Proposition 65 Warning

NEW Made in the USA LOCK JAWZ

LockJawz EXT 5.0 Extended Insulator ⚠

The LockJawz EXT5.0 is a 5" extended insulator that attaches with two points of contact to existing woven wire or paneling (¼" or less). It allows for the addition of an electrified strand and secures it to the existing fence.

Extended Insulator, 10/pk . . . IEXTLJB . . . 18.75

T-Post Spring Wire Clip ⚠

This T-Post wire clip is made using 12½ gauge high-carbon spring steel with a zinc coating. Install quick and easy, no twisting, no crimping, ***no*** tools required. Fits 1¼" and 1⅜" t-posts, non-electric applications. Made in the USA.

Spring Wire Clip, 50/pk . . . . . FTSWC. 11.25

LOCKJAWZ T-360 T-POST INSULATORS

LockJawz T-360 T-Post Insulator ⚠

The T-360 fits all standard 1¼" and 1⅜" t-posts, manufactured using UV-stabilized, high-density polyethylene to withstand the weather. The intuitive, arc-resistant design is easily attached to a t-post from 6 different positions, 360 degrees. Works with smooth wire, barbed wire, poly wire and poly rope. Made in the USA.

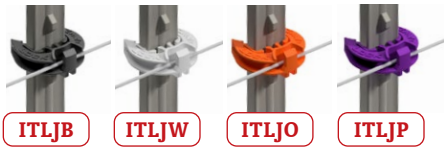

T-Post Insulator, 25/pk, Black . . . .ITLJB . . . 10.75
T-Post Insulator, 25/pk, Orange. . .ITLJO . . . 10.75
T-Post Insulator, 25/pk, Purple . . .ITLJP . . . 10.75
T-Post Insulator, 25/pk, White . . . .ITLJW . . 10.75

LockJawz Heavy-Duty T-360 T-Post Insulator ⚠

The new and improved heavy-duty version of the LockJawz insulator. This version is thicker and wider with increased arc guards to prevent grounding and electrical shorts. Accommodates strands up to ¼" in diameter and features built-in cinch slots for additional attachment security by using a wire-tie or zip-tie. Made in the USA.

HD T-Post Insulator, 20/pk, Black . . . . . ITLJBHD 11.75

LOCKJAWZ CB-360 CORNER BRACE KITS

Wood Post Corner Brace Kit ⚠

- Fits 1¼"-1⅜" T-Posts
- UV-stabilized resins
- Made in the USA

Wood Corner Brace Kit . . . . HLJWCK 29.99

T-Post Corner Brace Kit ⚠

- Fits 1¼"-1⅜" T-Posts
- UV-stabilized resins
- No tools required
- Made in the USA

T-Post Corner Brace Kit . . . . HLJTCK 29.99

⚠ **Items with this symbol do not qualify for free shipping.**



ELECTRIC NETTING

Kencove Electric Netting is proudly manufactured in our Blairsville, PA facility. Its lightweight, portable design allows the fence to be moved and set up repeatedly, making for almost instant pastures and enclosures. And most importantly, an electric net fence protects precious livestock, produce, and even pets from predators and pests.

Positive/Negative Electric Netting

For dry regions, or for ultimate control, we recommend positive/negative netting. In this system, the animal completes the circuit through the net. An animal touching both the positive (orange) and negative (green) lines will receive the full shock from the energizer. This allows optimum performance of the net, regardless of grounding conditions. ***Positive/negative nets are both green and orange.***

SEMI-RIGID VERTICAL STAYS

Provide stability and help prevent drooping between posts, which may cause electrical shorting. This creates an effective and visually appealing fence. Available in 3½" and 7" spacing.

GRADUATED SPACING



Horizontal lines are spaced closer together at the bottom and farther apart at the top providing superior predator control. To prevent electrical shorting during weed growth, the bottom line is non-conductive.

STAINLESS-STEEL CONDUCTORS

Long-lasting, highly conductive 304 stainless-steel ensures years of reliable service. Braided top strand provides unparalleled strength.

STEP-IN POSTS

Built into the netting to provide easy installation. Made with nylon-reinforced plastic. Thirteen posts are spaced every 13½'. No assembly required.

164' NETTING

⚠ Made in the USA

7" Stay Spacing, 164'	Posi/Neg	Orange	White	Green	Price
40" height, 9 lines		NSG			125.25
40" height, 9 lines			NSGW	NSGG	138.25
40" height, 12 lines	NSG12X				139.75
48" height, 14 lines			NP7W	NP7G	165.75
48" height, 14 lines	NP7X				166.25

3½" Stay Spacing, 164'	Posi/Neg	White	Green	Price
28" height, 10 lines		NRCW	NRCG	161.25
28" height, 10 lines	NRX			178.75
40" height, 10 lines		NSPCW	NSPCG	180.25
40" height, 10 lines	NSPCX			157.25
48" height, 14 lines		NPCW	NPCG	205.75
48" height, 14 lines	NPX			208.25

Did you know

kencove.com offers instructional videos on many products, including electric netting.

Replacement Posts ⚠

Step-In Posts with split-top cap to secure netting.

28" Post	NRP	3.49
40" Post	NSGP	3.95
48" Post	NPP	5.95
Replacement Foot Pedal, ½"	NPF	2.15
Replacement Foot Pedal, ⅜"	NPF3	2.15

82' NETTING

Designed with 7 step-in posts, these electric nets can make a 20' by 20' enclosure in minutes. Perfect for small flocks, backyard gardens, and pet containment.

7" Stay Spacing, 82'	Posi/Neg	White	Green	Price
40" height, 9 lines		NSGW2	NSGG2	96.75
40" height, 12 lines	NSG12X2			105.25
48" height, 14 lines		NP7W2	NP7G2	104.25
48" height, 14 lines	NP7X2			120.75

3½" Stay Spacing, 82'	Posi/Neg	White	Green	Price
28" height, 10 lines		NRCW2	NRCG2	108.25
28" height, 10 lines	NRX2			107.25
40" height, 10 lines		NSPCW2	NSPCG2	125.25
40" height, 10 lines	NSPCX2			114.75
48" height, 14 lines		NPCW2	NPCG2	131.75
48" height, 14 lines	NPX2			134.25

50' NETTING

3½" Stay Spacing, 50'	Posi/Neg	White	Green	Price
40" height, 12 lines	NSG12X50			87.25

FREE SHIPPING
On Qualified Orders of $99 and More

A low-impedance energizer is required to electrify the netting. We recommend a minimum of 0.25 output joules per net. This is a minimum recommendation. Additional power will supply a more memorable experience for the would-be predator. Always keep the fence electrified if it is erected, as animals may damage the electric wires. A ground rod is vital for proper operation. The Quick-Ground (MGQ) with built-in driver is ideal for use with portable battery energizers. To connect the energizer to the netting, you may need jumper leads (MPC). For uneven terrain, additional posts or fiberglass rods can be installed. See page 23 for additional fence energizers. A repair kit is included.

Easy to set up and move

Electric Netting can be installed or moved in less than 10 minutes with no elaborate list of materials or special tools needed. Each net comes with step-in posts built into the netting for quick and easy installation.

TAPERED, CCA-TREATED SOUTHERN YELLOW PINE

Size	Code	
4-5" x 6½', 60/bundle	P4X6.5TCP	Call for Updated Pricing and Availability
4-5" x 7', 60/bundle	P4X7TCP	Call for Updated Pricing and Availability
4-5" x 8', 60/bundle	P4X8TCP	Call for Updated Pricing and Availability
4-5" x 10', 50/bundle	P4X10TCP	Call for Updated Pricing and Availability
4-5" x 12', 50/bundle	P4X12TCP	Call for Updated Pricing and Availability
5-6" x 8', 45/bundle	P5X8TCP	Call for Updated Pricing and Availability
5-6" x 10', 35/bundle	P5X10TCP	Call for Updated Pricing and Availability
5-6" x 12', 30/bundle	P5X12TCP	Call for Updated Pricing and Availability
6-7" x 8', 30/bundle	P6X8TCP	Call for Updated Pricing and Availability
6-7" x 9', 30/bundle	P6X9TCP	Call for Updated Pricing and Availability

Posts treated with ACQ or equivalent available upon request. Bundle quantities subject to change.
Non-tapered posts are also available. Please call for details.

Made in the USA

GALVANIZED & PAINTED

T-POSTS

Galvanized Steel T-Posts

- Hot-dip galvanized
- Studded
- Bottom plate ensures driving stability and post alignment

6'	PT6P	*
7'	PT7P	*
8'	PT8P	*
10'	PT10P	*
12'	PT12P	*

**** Call for Updated Pricing and Availability***

SAFE-FENCE T-Post Sleeves

Used to make t-posts safer, more visible, and better looking. Complete the white-rail look for a fraction of the cost of vinyl with these attractive, easy-to-install, 2" x 2" x 5' sleeves.

5' T-Post Sleeve, white . . . . . JR1755 . . . 14.75

Safe-T-Post Caps

Made from durable, molded vinyl material to protect animals from sharp edges of steel fence posts. Attractive, bright white color enhances fence visibility. Tapered shape installs easily, yet grips tightly to the post.

Safe-T-Post Caps, white, 25/pk . . . PTC 9.75

T-Post Puller

This puller utilizes the leverage of its design to easily pull T-posts. Simply lift the handle to the upright position and engage the post. Then lift the post out of the ground with a downward push. Full steel composition ensures strength.

T-Post Puller . . . . . TTP. 39.95

T-Post Clips

Galvanized and ideal for securely attaching wire to metal t-posts.

T-Post Clips, 50/pk. . . . . .FTC 9.75
T-Post Clips, 1,000/pk . . . . .FTCK 139.75

T-Post Clamp Mount

This mounting bracket is ideal for attaching energizers and products with a keyhole hanging design to t-posts.

T-Post Clamp Mount . . . . . .HTPA 1.95

WEDGE-LOC™

Wedge-Loc Bracing System

Designed to quickly erect end and corner assemblies. Fits all steel t-posts. Solid, rust-free aluminum.

Universal Collar . . . . . .HWC 4.50
Heavy Wedge to Lock Collars . . .HWW 4.50
60-Degree Socket . . . . . .HW6. . . . . .4.50
90-Degree Socket . . . . . .HW9. . . . . .4.50
Gate Hinge. . . . . .HWG 31.75
2x4/2x6 Holder. . . . . .HW2H* . .33.75
Plywood Holder . . . . . .HWPH* . .31.25
Universal Brackets. . . . . .HWUB* . .33.75
Diagonal Brace Set . . . . . .HWDB . . . 17.75
Diagonal Corner Brace Set . . . . .HWCS . . .28.25
Horizontal Brace Set . . . . . .HWHB . . . 17.25

Collar and wedges included.

Diagonal Brace - HWDB



2 collars (HWC)
2 wedges (HWW)
2 60° sockets (HW6)

Diagonal Corner - HWCS



3 collars (HWC)
3 wedges (HWW)
4 60° sockets (HW6)

Gate Hinge Set - HWG



2 hinges to install
1 gate

Horizontal Brace - HWHB



2 collars (HWC)
2 wedges (HWW)
2 90° sockets (HW9)

⚠ California residents see page 2 for Proposition 65 Warning

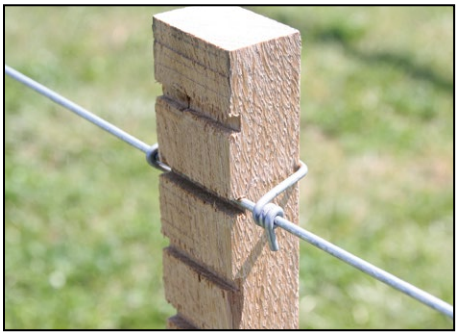

KIWI® Multi-Groove Droppers™

Used to prevent horizontal wire separation. Save money on wood posts by using 2 droppers every 15' with 45' post spacing. Made of white oak and cut every inch, these droppers can be used for almost any fence configuration.

48" White Oak Dropper . . . . . PMO 4.69
Save on bundle of 25 . . . . . .4.59 each

Galvanized Dropper Clips

Used to secure the wire to the dropper.

Dropper Clips, 100/pk . . . . . .FC1 . . . . . 14.75
Dropper Clips, 1,000/pk. . . . . .FC1K 136.75

Insulator Clips

- Use with ⅛" rope, coated wire, or twine
- UV-stabilized clips
- Easy installation
- Fifty ¾" screws included

Insulator Clip, black, 25/pk. . . . . IRCB 7.75
Insulator Clip, white, 25/pk. . . . . IRCW 5.75

Post Tamper

Makes a difficult job a little easier. Designed with a 65" galvanized pipe handle and a cast iron ramming head, it is ideal for compacting stone and soil around posts. Weighs 8½ lbs.

Post Tamper. . . . . TAMP 42.95

KIWI® Poly-Dropper Clips

100/pk. . . . . FCPK. 7.95
1,000/pk . . . . . FCPKK 74.75

Dynamic Diagonal Brace

Bracing is made easier with Kencove's floating design, the Dynamic Diagonal Brace. The major advantage of a floating brace is that it only requires digging or pounding one post. The anchor post is the only permanently fixed component, everything else is simply set into place allowing flexibility for changing fence conditions.

The Dynamic Diagonal Brace works by directing the force on the anchor post into the ground via the floating foot and back through the brace cable to the buried end of the anchor post.

- Made up of 4 basic components
- Assembles in minutes after the anchor post is in place
- Build it on any terrain using a Line Boss or wood post
- Use it at corners and ends of multi-strand high-tensile fences
- Easier to build, nearly as strong as more complex H-braces

Dynamic Diagonal Brace . . . . . HDD 45.99
Brace Accessories Kit . . . . . HDDA 48.75

MANUAL POST DRIVERS

Heavy-Duty T-Post Pounder ⚠

Provides an easy way to set steel t-posts and ground rods in virtually any type of soil. The large handles allow for comfortable hand placement. Using your up and down momentum, the heavy-duty t-post pounder drives posts with maximum impact.

T-Post Pounder . . . . . TPR. 28.75

T-Post Puller ⚠

This puller utilizes the leverage of its design to easily pull T-posts. Simply lift the handle to the upright position and engage the post. Then lift the post out of the ground with a downward push. Full steel composition ensures strength.

T-Post Puller . . . . . TTP. 39.95

FARMHAND 2-STROKE POST DRIVER

NEW

FENCER'S CHOICE

Fencer's Choice® Farmhand 2-Stroke Postdriver ⚠

The Farmhand is the perfect driver for all your fence repair and maintenance chores around the farm, ranch, and garden. This handheld driver is light-weight and powered by a 1.2 hp 2-stroke engine. The barrel accommodates T-Posts, ground rods, and other post materials up to 2.67" diameter. Two-way dampening springs reduce vibration and operator fatigue during operation.

Farmhand Driver . . . . TDG55 . . . . . 415.75

Top handle for easy portablity
Two-way dampening springs for reduced vibration
Barrel accomodates post materials up to 2.67" diameter

⚠ California residents see page 2 for Proposition 65 Warning

TITAN
POST DRIVERS

These powerful, 100% self-contained gas powered post drivers are built for all day use. No hoses or compressor needed. All drivers come with tool kit and a protective storage case.

PGD1032

PGD1032H

PGD2875

PGD3875

Farm & Ranch Post Drivers ⚠

Titan gas powered post drivers reduce time and energy required when driving t-posts. The 4 stroke engine with recoil pull start is simple to operate and maintain for that occasional fencing project. Integrated dampening springs, trigger style throttle/stop switch provide operator comfort. Visit kencove.com for complete list of reducer collars.

3" OD Barrel, 32lbs NEW	PGD1032	679.00
3" OD Barrel, Honda NEW	PGD1032H	949.00
3¼" OD Barrel, 45lbs.	PGD2875	489.75
4" OD Barrel, 50lbs	PGD3875	849.00

Titan Accessories ⚠

PGD2875 Accessories

1" Sleeve, 2875	YPGD2875-50-1	15.00
1.8" Sleeve, 2875	YPGD2875-50-1.8	15.00
2" Sleeve, 2875	YPGD2875-50-2	15.00
3" Sleeve, 2875	YPGD2875-50-3	15.00
75 Series Lube	PGD75LUBE	15.00
PGD2875 Case	PGD2875CC	172.00

PGD3875 Accessories

1" Sleeve, 3875	YPGD3875-41-1	17.00
2" Sleeve, 3875	YPGD3875-41-2	17.00
3" Sleeve, 3875	YPGD3875-41-3	17.00
4" Sleeve, 3875	YPGD3875-41-4	17.00
75 Series Lube	PGD75LUBE	15.00
PGD3875 Case	PGD3875CC	189.00

BRYCE SUMA POST DRIVERS

The Bryce Suma HD2 driver was born from thoughts of a hardy fence builder in the extreme hill conditions of Scotland. This contractor grade driver with 4" rock spike is built to conquer the toughest conditions. The hydraulic tilt provides 15 degrees front/back and side/side with 14" of right side slide from center with ease. Drive posts up to 11' tall and 12" diameter with confidence because the 882 lb hammer delivers 125,000 pounds of impact.

- 125,000 lbs of impact
- Contractor-grade performance
- Versatile mounting options
- Hydraulic tilt controls
- Low-maintenance rope system

Bryce Suma Post Driver

Bryce Suma HD2. . . . . PK30R. 14,795.00

WATCH THE VIDEO

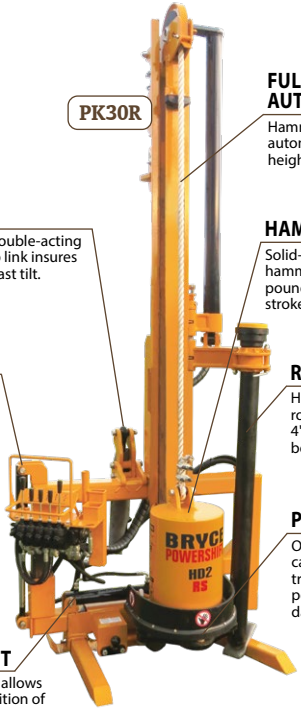
PK30R
FULLY AUTOMATIC MAST
Hammer stroke is fully automatic. Mast hammer height is fully adjustable.
TOP LINK
Two-stage, double-acting hydraulic top link insures maximum mast tilt.
HAMMER
Solid-steel, free-falling hammer provides 125,000 pounds of impact at full stroke.
SIDE TILT
Smooth and precise control of side to side tilt.
ROCK SPIKE
Helps to drive posts in rocky or hard ground. 4" diameter spike can be drive 4' deep.
POST CAP
One-piece forged, carbon steel, heat treated and tempered post cap reduces damage to post.
SIDE SHIFT
14" side shift allows for quick position of the driver.

	PK30R
Post Height	12'
Post Diameter	12"
Impact	125,000 lbs
Hydraulic Recommendation	9 GPM @ 2,000 PSI
Tilt Side/Side	15°
Tilt Front/Back	15°
Side Shift	14"
Hammer Weight	882 lbs
Weight	2,300 lbs

⚠ California residents see page 2 for Proposition 65 Warning

Kencove Nitro

Designed for durability, safety, and ease of operation, the Kencove Nitro surprises even the experts. The Nitro works by hydraulically compressing nitrogen gas, transferring this energy directly to the hammer head, a revolutionary technology in the fence industry. The safest driver on the market, all controls are handled from the cab of a skid steer. With only 2" of stroke, this unit drives posts rapidly with hydraulic down-pressure and 500-800 beats per minute, reducing damage to posts. Using only 1 grease fitting and minimal moving parts, these drivers will provide years of low-cost operation. Available in 2 models for skid steer and 2 models for excavator. Kencove offers a 1-year warranty on the Nitro drivers.
Warranty excludes chain, hooks, and head.

	Post Diameter	Hydraulic Reccommendation	Weight
PDN750	8"	10 GPM @ 1,600 PSI	1,200 lbs
PDN1000	8"	15 GPM @ 1,800 PSI	2,000 lbs
PDN750X	8"	10 GPM @ 1,600 PSI	900 lbs
PDN1000X	8"	15 GPM @ 1,800 PSI	1,100 lbs

Unit and extra storage tank not filled with nitrogen.

- Attaches to most skid loaders with the universal quick-attach plate
- Low center of gravity allows for ease of use, storage, and transport
- 10' chain for plumb bob and pulling posts
- Nitrogen tank and gauge for pressurizing and testing the system

Nitro Post Drivers, Complete

750, Skid Steer . . . . PDN750. . . . . 8,175.00
1000X, Excavator. . . PDN1000X . . 6,995.00

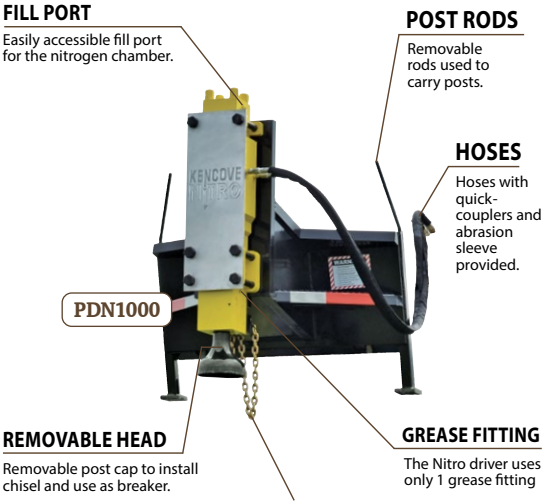
FILL PORT
Easily accessible fill port for the nitrogen chamber.
POST RODS
Removable rods used to carry posts.
HOSES
Hoses with quick-couplers and abrasion sleeve provided.
PDN1000
REMOVABLE HEAD
Removable post cap to install chisel and use as breaker.
GREASE FITTING
The Nitro driver uses only 1 grease fitting
CHAIN ACCESSORY
10' of 5/16" chain to use as a plumb bob or to pull posts. Comes with standard hook and slip hook.

See Video Online

Nitro Excavator Unit

Mounting bracket must be customized for your excavator model. Call for details.
Chain not included.

PDN750X
Designed for 4-7 ton machines.

PDN1000X
Designed for 6-9 ton machines.

Items with this symbol do not qualify for free shipping.

KENCOVE POST DRIVER

Kencove Post Drivers

Fast and powerful. With only 6 moving parts, they are built for durability and easy maintenance. All models take just a few minutes to mount or detach. Some assembly required.

Kencove Post Drivers, Complete ⚠

PD80, manual . . . . . PD80 . . . . . 3,999.00*
PD100, manual . . . . . PD100 . . . . 4,499.00*
PD80, skid steer. . . . . PD80SS. . . 4,425.00*
PD100, skid steer. . . . . PD100SS. . 4,525.00*
PD80, hydraulic . . . . . PD80H. . . . 4,999.00*
PD100, hydraulic . . . . . PD100H. . . 5,499.00*
PD80, hyd, skid steer . . PD80HSS . .5,075.00*
PD100, hyd, skid steer. . PD100HSS .5,975.00*

** Delivered Price*

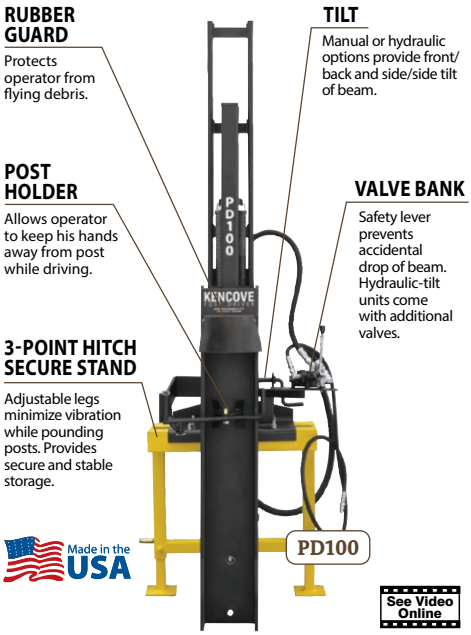
RUBBER GUARD
Protects operator from flying debris.
TILT
Manual or hydraulic options provide front/back and side/side tilt of beam.
POST HOLDER
Allows operator to keep his hands away from post while driving.
VALVE BANK
Safety lever prevents accidental drop of beam. Hydraulic-tilt units come with additional valves.
3-POINT HITCH SECURE STAND
Adjustable legs minimize vibration while pounding posts. Provides secure and stable storage.
Made in the USA
PD100
See Video Online

	PD80/PD80H	PD100/PD100H
Post Height	10'	10'
Post Diameter	7⅛"	8¾"
Impact	30,000 lbs	71,500 lbs
Tilt Side/Side	15°	15°
Tilt Front/Back	15°	15°
Rear Mount	Yes	Yes
Nyrim Blocks	4	4
Weight	486 lbs	694 lbs

- Up to 100,000 lbs of impact
- Manual or hydraulic tilt
- 15° of front-to-back and side-to-side tilt
- Drives posts up to 10' tall

Driver Springs (ends included) ⚠

HD8,80/HPD-16. . . . . PD8S. . . .46.75
HD10,100/HPD-20 . . . . PD10S. . .79.75
HD-12/HPD-24. . . . . PD12S. . 134.75
KIWI® Post Driver . . . . PDKS . . 89.95

Spring Ends (each) ⚠

HD-8/HPD-16. . . . . PD8E. . . . 2.35
HD-10/HPD-20. . . . . PD10E. . . 4.45
HD-12/HPD-24, top . . . PD12TE. .17.95
HD-12/HPD-24, bottom PD12BE .17.95

⚠ California residents see page 2 for Proposition 65 Warning

- 120,000 lbs of impact
- Commercial-grade performance
- Versatile mounting options
- 50° side-to-side tilt

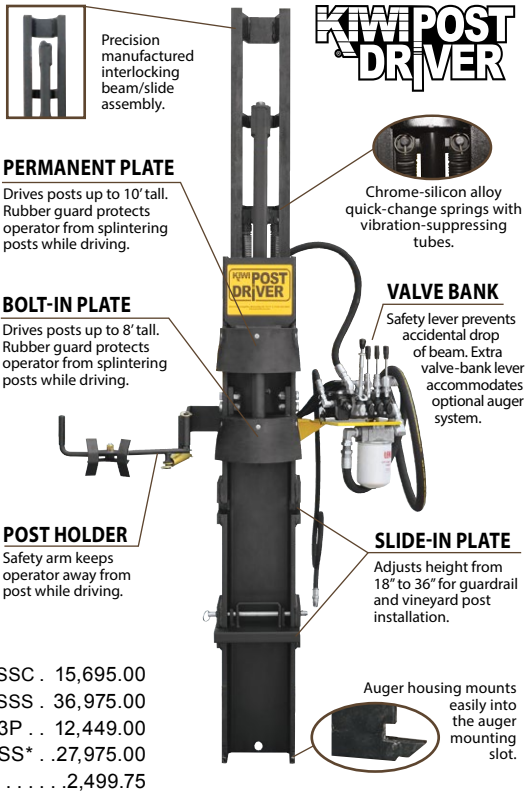
KIWI POST DRIVER
Precision manufactured interlocking beam/slide assembly.
PERMANENT PLATE
Drives posts up to 10' tall. Rubber guard protects operator from splintering posts while driving.
BOLT-IN PLATE
Drives posts up to 8' tall. Rubber guard protects operator from splintering posts while driving.
POST HOLDER
Safety arm keeps operator away from post while driving.
Chrome-silicon alloy quick-change springs with vibration-suppressing tubes.
VALVE BANK
Safety lever prevents accidental drop of beam. Extra valve-bank lever accommodates optional auger system.
SLIDE-IN PLATE
Adjusts height from 18" to 36" for guardrail and vineyard post installation.
Auger housing mounts easily into the auger mounting slot.

KIWI® Post Drivers

Skid Steer, Self-Contained	KPDSSSC	15,695.00
Skid Steer, Self-Contained, Side-Slide	KPDSSSS	36,975.00
Standard Tractor Post Driver	KPDT3P	12,449.00
Tractor, Self-Contained, Side-Slide	KPDTSS*	27,975.00
KIWI® Auger	KPDA	2,499.75
4" Auger Flight	KPD4A	479.75
5½" Auger Flight	KPD5A	559.75
4½" Standard Head, 4 teeth	KPD5TH4	299.95
6" Standard Head, 6 teeth	KPD5TH6	319.95
4½" Blue Demon Head, 5 teeth	KPDBDH4	379.75
6" Blue Demon Head, 7 teeth	KPDBDH6	549.75

Some assembly required. Optional Tall Beam available. Call for details.

**Also available with PTO option.*

	Skid Steer	Side-Slide Tractor/Skid Steer	Tractor
Post Height	10' *	10'	10'
Post Diameter	8¾"	8¾"	8¾"
Impact	120,000 lbs	120,000 lbs	120,000 lbs
Hydraulic Recommendation	15 GPM @ 1,500 PSI	15 GPM @ 1,500 PSI	15 GPM @ 1,500 PSI
Tilt Side/Side	50°	50°	50°
Tilt Front/Back	Controlled by Skid Steer	50°	50°
Side Slide	No	48"	No
Weight	1,600 lbs	2,650 lbs	1,200 lbs

Driver specifications are for standard beam.
**Max Post Height listed is for standard beam, 12' post height with tall beam.*

Down-Pressure Auger

The KIWI® Down-Pressure Auger eliminates the need to manually position a heavy auger assembly into the KIWI® post driver.

DP Auger . . . . KPDAP . . 4,995.95

Items with this symbol do not qualify for free shipping.

- Comes with: tool box, nitrogen charge kit and filled nitrogen bottle
- All Montana post drivers come with 1 year warranty
- 7" chain pull included in all skid steer models

Montana Drivers, Complete

750, Skid Steer	PDM750F	6,800.00
1000, Skid Steer	PDM1000F	9,100.00
1500, Skid Steer	PDM1500F	11,500.00
750, Excavator	PDM750EXF	6,800.00
1000, Excavator	PDM1000EXF	8,000.00
1500, Excavator	PDM1500EXF	11,000.00
Auger System	PDMAUG-4-C	3,400.00
Rock Spike	PDMRS	549.75
Tilt, Skid Steer	PDMTILT	2,750.00
350E, T-Rex	PDMTREX	3,400.00

Montana Post Driver

Montana Hydraulic Post Drivers provide innovation and ease when installing posts. These drivers are a serious productivity tool built on hydraulic concrete breaker technology, enabling you to install fence posts even in hard and rocky ground. Attaching one of these post drivers to a skid loader can be done in less than a minute. Choosing a Montana Post Driver will give you ease-of-use, longevity, and optimum efficiency.

	Post Diameter	Hydraulic Reccommendation	Machine Weight	Weight
PDMTREX	4⅜"	5-10 GPM @1,300 PSI	N/A	320 lbs
PDM750F	7"	11-18 GPM @2,000 PSI	N/A	1,380 lbs
PDM1000F	8"	13-24 GPM @2,200 PSI	N/A	2,000 lbs
PDM1500F	9"	16-27 GPM @2,300 PSI	N/A	2,350 lbs
PDM750EXF	7"	11-18 GPM @2,000 PSI	4-7 ton excavator	800 lbs
PDM1000EXF	8"	13-24 GPM @2,200 PSI	6-9 ton excavator	825 lbs
PDM1500EXF	9"	16-27 GPM @2,300 PSI	7-14 ton excavator	1,310 lbs

Unit and extra storage tank are filled with nitrogen.

FILL PORT
Easily accessible fill port for the nitrogen chamber.

POST RODS
Removable rods used to carry posts.

HOSES
Hoses with quick-couplers and abrasion sleeve provided.

REMOVABLE HEAD
Removable post cap to install chisel and use as breaker.

GREASE FITTING
This driver uses only 1 grease fitting

CHAIN ACCESSORY
7' of 5/16" chain to use as a plumb bob or to pull posts. Comes with standard hook and slip hook.

⚠ California residents see page 2 for Proposition 65 Warning

Vector Post Drivers

Mini-Excavator Post Driver . . . . . PVME 3,195.00
Skid Steer Mounting Plate . . . . . PVSMP . . . 2,895.95

VECTOR POWERDRIVE

	Model 3	Mini Excavator	Utility Model
Hammer Weight	840 lbs	440 lbs	530 lbs
Impact at full stroke	125,000 lbs	55,000 lbs	90,000 lbs
Tilt front/back	15°	90°/50°	15°
Tilt side/side	15°	NA	20°/60°
Side shift	14"	No	24"
Hydraulic Recommendations	14 GPM @ 2,000 PSI	14 GPM @ 2,000 PSI	8 GPM @ 2,000 PSI
Rock spike	Yes	No	No
Adjustable mast	Hydraulic	NA	No
Post Height	11'	16' *	9'
Post Diameter	12"	8"	8"
Weight	2,620 lbs	902 lbs	2,090 lbs

Rock Spike and Tall Beam will add additional weight to the accommodating driver.
**Max post height for Mini-Excavator Mount is determined by excavator model.*
***Max post height listed is for standard beam, 14' post height with tall beam.*

- Up to 130,000 lbs impact
- Contractor grade performance
- Versatile mounting options
- Hydraulic tilt controls
- Low-maintenance rope system

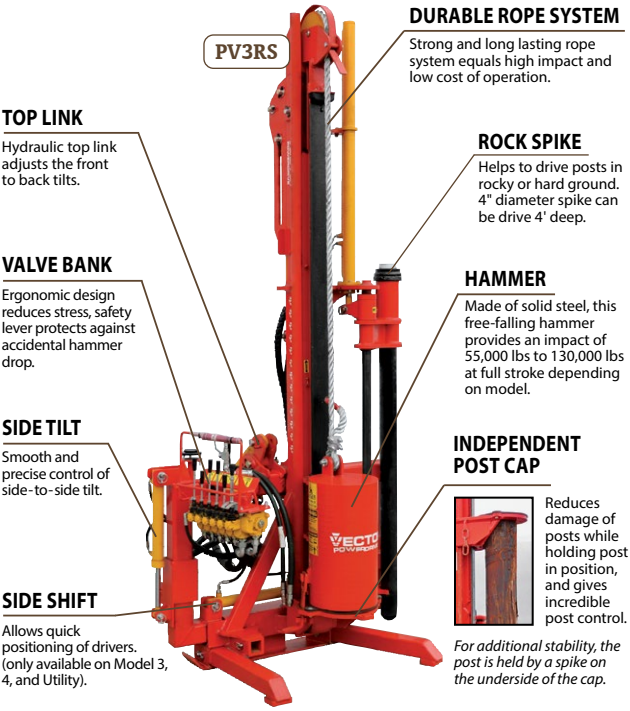
PV3RS
DURABLE ROPE SYSTEM
Strong and long lasting rope system equals high impact and low cost of operation.
TOP LINK
Hydraulic top link adjusts the front to back tilts.
ROCK SPIKE
Helps to drive posts in rocky or hard ground. 4" diameter spike can be drive 4' deep.
VALVE BANK
Ergonomic design reduces stress, safety lever protects against accidental hammer drop.
HAMMER
Made of solid steel, this free-falling hammer provides an impact of 55,000 lbs to 130,000 lbs at full stroke depending on model.
SIDE TILT
Smooth and precise control of side-to-side tilt.
INDEPENDENT POST CAP
Reduces damage of posts while holding post in position, and gives incredible post control.
SIDE SHIFT
Allows quick positioning of drivers. (only available on Model 3, 4, and Utility).

For additional stability, the post is held by a spike on the underside of the cap.

Mini Excavator Driver

PVME Mini-Excavator Driver offers a 440 lb solid steel hammer providing up to 55,000 lbs of impact on a durable rope system. Extreme versatility and reach.

Items with this symbol do not qualify for free shipping.

KIWI® Sure-Latch Gate Latches

- Simple to install
- 1-handed operation
- Allows gate to open either direction
- Junior Latch fits 1¼"-1½" tube gates
- 2-Way Latch fits 1¼", 1⅝", and 2" tube gates

KIWI® Junior Gate Latch . . . . . GLJR 27.75
KIWI® 2-Way Gate Latch. . . . . GLL. 31.25

Universal Gate Latch

- Can be padlocked
- Pre-loaded spring design assures secure fastening
- Attaches easily to tube and mesh gates up to 1⅝"

Universal Gate Latch . . . . . GLW 19.75

KIWI® One-Way Latch

- Prevents gate end from sagging or swinging
- Can be padlocked
- 1-handed operation
- Fits 1¼", 1⅝", and 2" tube gates

KIWI® One-Way Latch . . . . . GL1 . . . . . 27.75

Chain Gate Hook

- Chain latch with secure, stainless-steel spring latch
- Hot-dip galvanized hook, chain, and quick link
- Includes two hot-dip galvanized 3" staples

Chain Gate Hook . . . . . GNZLU 9.75

Bolt-On Hinge Clamps

- Galvanized
- Fit ¾" hinge bolt pins

For 1½" Tube Gates. . . . . GH15 . . . . . 7.75
For 2" Tube Gates . . . . . GH2 . . . . . 8.75

KIWI® Gate Wheel

Helps take the work out of opening and closing heavy gates. The end post is not stressed with having to support the weight of the gate. Bolts onto 1¼", 1⅝", and 2" tube gates.

KIWI® Gate Wheel . . . . . GW2 . . . . . 28.75

KIWI® Gate Anchor

- Holds gate open in any position while you drive, walk, or run livestock through
- Prevents gate end from sagging or swinging
- Use horizontally as a slide latch
- Fits 1¼", 1⅝", and 2" tube gates

KIWI® Gate Anchor . . . . . GLA 27.75

6" Gate Lag Screw

- Hot-dip galvanized
- ¾" diameter lag and hinge pin

HDG Gate Lag Screw . . . . . GHL34 . . . . 6.25

12" Gate-Hinge Bolt

¾" diameter bolt and hinge pin, with 2 nuts and washers to allow easy adjustment of the gate.

12" Gate-Hinge Bolt. . . . . GHB. 9.25



Locking Gate-Hinge Bolts

- Secure bolt to post to prevent rotating hinge
- Ideal for long or heavy gates
- Include 2 nuts and washers

¾" x 12" . . . . . .GHBX. 12.75
⅝" x 12" . . . . . .GHBX5. . . . . 11.50

Ship Auger Drill Bits

These bits are designed to quickly clear shavings from the hole. Use the ⅜" diameter for brace pins. Use the ¾" diameter for mounting gate-hinge bolts. Save time, effort, and money by getting 1 of each diameter.

⅜" x 13" . . . . . TDB3813 . . . . . 11.75
¾" x 13" . . . . . TDB3413 . . . . . 14.75

2" Tube Gates, 50" Height

- Hot-dip galvanized after fabrication
- Welded chain slot-type catch
- Includes two 12"x ¾" gate-hinge bolts and two hinge clamps. A chain (not included) can easily be used to hold gate open or closed.

4'	GR4	*
6'	GR6	*
8'	GR8	*
10'	GR10	*
12'	GR12	*
14'	GR14	*
16'	GR16	*
18'	GR18	*

Mesh-Wire Gates

- Hot-dip galvanized after fabrication
- 2" x 4" spacing of welded wire
- 50" height
- Ideal for horse and sheep fence
- Includes two 12" x ¾" gate-hinge bolts and two hinge clamps

4'	GRW4	*
6'	GRW6	*
8'	GRW8	*
10'	GRW10	*
12'	GRW12	*
14'	GRW14	*
16'	GRW16	*
18'	GRW18	*

Unless specified, all gates are manufactured 6" shorter to accommodate hardware.

1⅝" Tube Gates

- Hot-dip galvanized after fabrication
- 6-rail, 50" height
- Plastic plugs in the vertical tubes
- Includes two 12" x ¾" gate-hinge bolts and two hinge clamps

4'	GRL4	*
6'	GRL6	*
8'	GRL8	*
10'	GRL10	*
12'	GRL12	*
14'	GRL14	*
16'	GRL16	*
18'	GRL18	*

8' Deer Gates

- Hot-dip galvanized after fabrication
- 4" x 4", 6 gauge welded mesh panels
- Saddle notched for superior strength
- Includes three 12" x ¾" gate-hinge bolts and three hinge clamps

4'	GDG4	*
6'	GDG6	*
8'	GDG8	*
10'	GDG10	*
12'	GDG12	*
14'	GDG14	*
16'	GDG16	*

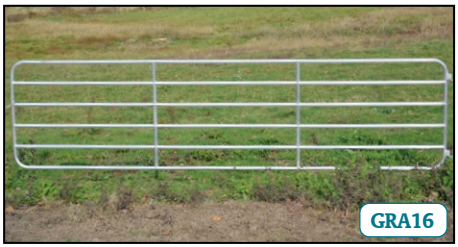

Aluminum Tube Gates

Our aluminum gates have a 1¼" square tube rotated so that it appears diamond shaped. A total of 48" tall with 6 bars evenly spaced 7½" apart. V-notched welds for superlor strength. Two attached hinge brackets, and two HDG 12" x ¾" gate-hinge bolts included. Lightweight, easy-swinging, and incredibly strong gates.

4'	GRA4	*
6'	GRA6	*
8'	GRA8	*
10'	GRA10	*
12'	GRA12	*
14'	GRA14	*
16'	GRA16	*
18'	GRA18	*

Kencove's spring gates are Class 3 galvanized for long life. Each type includes a handle, insulators, and hookup system.

White Spring Gates

With electrically-conductive powder coating.

Up to 14'	GSCW	11.75
Up to 24'	GSLW	13.75
14' Replacement Spring	GSCWS	8.75
24' Replacement Spring	GSLWS	9.75

Galvanized Spring Gates

Include a large diameter galvanized spring.

Up to 14', for wood posts	GSC	9.75
Up to 24', for wood posts	GSL	11.75
Up to 14', for t-posts	GST	9.75
Up to 24', for t-posts	GSTL	11.75
14' Replacement Spring	GSCS	6.75
24' Replacement Spring	GSLS	7.75

Stainless-Steel Spring Gates

Include a rust-proof stainless-steel spring.

Up to 24'	GSSL	17.75
24' Replacement Spring	GSSLS	11.75

Electric Bungy Gate Kit

- Stays off the ground while gate is open
- Elastic cord stretches up to 20'
- Safer and more visible than spring gates

Electric Bungy Gate Kit	GSR	14.95

Electric Bungy Gates

The bungy cord is white with red stripes and incorporates 6 SS wires. Because this product stretches, you only need to buy 75% of the length of your gate. Approximately ⅛" diameter.

Bungy Rope, per ft	GBFT	0.45
Bungy Rope, 330'	GB330	119.75
Wire Splice Clamp, 3/pk	CWBT	4.75
Pin-Lock Insulator, 25/pk	I8PW	8.25

Drive-Thru Electric Gates

Spring loaded and adjustable.

13'-19'	GDTS	249.75
18'-24'	GDTL	269.75
Replacement FG Rods	GDTXR	7.95
Replacement Streamers	GDTXS	34.95

(include hoses)

Strainrite Gudgeon Gate Hole Guide

Hang a gate perfectly every time with the Strainrite Gudgeon Gate Hole Guide. This tool kit allows you to dry fit your gate ***and*** drill your pilot holes while the gate is held in position. Perfect for novices and contractors. No more crooked gates! Made in New Zealand.

Gate Hole Guide	GRHG	259.75

⚠ California residents see page 2 for Proposition 65 Warning

O'Briens Gate Handle ⚠

- Galvanized expansion spring
- More tolerance for gate post movement

O'Briens Gate Handle, yellow . . GNC 7.85
O'Briens Gate Handle, black . . . GNCBL 7.85

Polycarbonate Gate Handle ⚠

An internal expansion spring provides excellent holding strength without stressing the insulating plastic. Durable, high-quality polycarbonate.

Polycarbonate Gate Handle . . . . . GPC . . . 3.95

Heavy-Duty Gate Handle ⚠

Use with Double-Loop Handle Hook (GHUD or JTR).

Heavy-Duty Gate Handle . . . . GHD. 5.25

Non-Conductive Gate Handle ⚠

Use with electric twine or ribbon. Connect to a grounded or hot wire and electrify after the portable fence is built.

Non-Conductive Handle . . . . . GPL 1.05

Speedrite ZAMMR Handle ⚠

Multi-purpose handle features a live-wire hook and an insulated hook. Versatile design allows you to connect temporary fence wire, tape, or bungy without needing to change handles.

Speedrite ZAMMR Handle . . . . .GPZ 4.25

Double-Loop Handle Hook ⚠

Designed for use where t-posts terminate rope or tape fence. One loop holds the fence while the other holds the gate handle.

Double-Loop Hookup, wood . . . . . GHUD . . 1.75
Double-Loop Hookup, t-post, 2/pk . JTR 3.50

Economy Plastic Handle ⚠

Economy Handle, black . . . . . GPE 2.05
Economy Handle, white . . . . . GPEW 2.05

Stainless-Steel Gate Handle ⚠

2 internal tension rods add extra strength to this stainless-steel handle.

Stainless-Steel Gate Handle . . . GPCS 5.95

Rubber Gate Handle ⚠

- Soft rubber casing
- Heavy-stamped, steel-plated hook
- Stretches to 3½"

Rubber Gate Handle . . . . . .GRB 2.25

Stainless-Steel Gate Handle ⚠

This handle has an internal galvanized tension spring. Allows for movement with gate posts. Spring stretches 2½". Total length of 9½".

Spring Gate Handle, white. . . . . GCCW 2.45
Spring Gate Handle, black. . . . . GCCB 2.45
Spring Gate Handle, yellow . . . . GCCY 2.45

3-Hole Handle Hookup Set ⚠

Connect your wire to the galvanized plate and still have room for 2 gate handles.

Galvanized Handle Hookup Set . .GHU 2.50
Handle Hookup for T-Posts . . . . . .GHTU 2.55
3-Hole Handle Hookup Set . . . . . .GHU3 . . . .2.75
Stainless Handle Hookup . . . . . .GHU3S. . . 3.75

Megaflow Trough Valves

- Mounting: side or bottom
- Pressure range: 5-150 PSI
- Max flow: 55 GPM (¾")
- Max flow: 90 GPM (1")

Megaflow Valve, ¾", Long-Tail. . .VJV. 56.75
Megaflow Valve, 1", Long-Tail . . VJV1LT . . . 56.75
Megaflow/Topaz Service Kit . . . .VJM 16.75

Tranzformer Valve

Unleashes the potential of your water supply by transforming a common valve into a full-flow valve in seconds. Adapts to your hose quickly and easily.

Tranzformer Valve . . . . . .VJF 45.95

Tank Mount Adapter

Use to mount a float valve in a tank with a garden hose connection. ¾" pipe thread to ¾" hose thread.

- Max pressure: 150 PSI
- Tough enough to be tightened with pliers
- Easy to install and tighten

Tank Mount Adapter. . . . . VCTMA 23.75

Protect-A-Mount

- Use with ¾" Topaz or Rojo valves
- Quickly mounts valve on tank
- Provides protection from animals
- Fits most style tanks

Protect-A-Mount . . . . . .VJPM 69.75

Frost Pro Kit for Jobe Topaz Valve ⚠ NEW

Allows continuous flow through supply line and valve to minimize freezing in cold weather. Only compatible with Topaz and Vortex valves. The Topaz extension arm can be lowered to counter-act the continuous trickle and reduce the chance of overflow.

Frost Pro Kit . . . . . VJTFP. 17.95

Jobe™ valves

Rojo Float Valve

- Mounting: side, bottom, or top
- Pressure range: 0-150 PSI
- Max flow: 4½ GPM

Rojo Float Valve. . . . . .VJR. 33.75
Service Kit . . . . . .VJRM 13.95

Rojo High-Flow Valve

- Mounting: side, bottom, or top
- Pressure range: 0-75 PSI
- Max flow: 6 GPM

Rojo High-Flow Valve . . . . . .VJRHF 36.95
Service Kit . . . . . .VJRHM. 11.75

Topaz Trough Valves



- Mounting: side, bottom, or top
- Pressure range: 5-100 PSI
- Max flow: 90 GPM

Jobe Topaz Valve, ¾" . . . . . .VJT. 82.95
Jobe Topaz Valve, 1" . . . . . .VJT1. . . . . 84.95
Jobe Topaz Valve, 1¼" . . . . . .VJT1.25 . . 86.95
Frost-Pro for VJT . . . . . .VJTFP . . . 17.95
HD ¾" Thread to ¾" Hose Adapter VCHAHD . . 7.95
Megaflow/Topaz Service Kit . . . .VJM 16.75

Plasson Quick-Coupler Valves ⚠

- One-handed operation
- For use in above ground or buried water systems

1" Female Coupler/Valve . . . . . .VC1 . . . .17.95
¾" Female Coupler/Valve . . . . . .VC34 . . .16.75
¾" Riser, required male part . . . . .VCR 6.75

⚠ California residents see page 2 for Proposition 65 Warning

Plasson Coupler Valves & Adaptors

Plasson water valves provide strong, leak-proof connections for PE pipe systems. Made from durable polypropylene with NBR seals, these compression-style fittings are built to handle pressure and ensure reliable water flow. Ideal for straight runs, branching, or quick coupler connections, they offer dependable performance and easy installation in a variety of settings.

¾" 90° TEE Coupler Valve	VCT34	14.75
1" 90° TEE Coupler Valve	VCT1	17.75
¾" x ¾" Straight Coupler Valve	VCS34	5.95
1" x 1" Straight Coupler Valve	VCS1	9.75
¾" Female Adaptor for ¾" Quick Coupler Valve (VC34)	VC34FA	5.75
1" Female Adaptor for 1" Quick Coupler Valve (VC1)	VC1FA	6.95

Behlen Country Rigid Poly Stock Tanks

Behlen Rigid Poly Stock Tanks are structural foam tanks with seamless, one-piece construction. They feature a reinforced top rim and bottom to withstand rough use from large livestock. These tanks are stackable for easy transport and storage. Comes with a 2-year manufacturer's warranty. Made in the USA.

60 Gallon Stock Tank	BCST60	98.75
100 Gallon Stock Tank	BCST100	114.75
150 Gallon Stock Tank	BCST150	181.75
300 Gallon Stock Tank	BCST300	289.75

Tru-Test Waterers

These premium livestock watering solutions are designed for durability, efficiency, and year-round performance with freeze-resistant insulation. Each equipped with a Jobe valve, they deliver superior water pressure and automatically replenish their supply. The WaterWells have a low-profile design that makes them ideal for cattle and other species, while the WaterPro is the perfect option for taller animals. Made in the USA.

WaterPro 2, 7 Gallon Waterer	TT-831832	599.75
WaterWell 2, 31 Gallon Waterer	TT-831831	839.75
WaterWell 4, 60 Gallon Waterer	TT-831830	1,194.75



Stainless-Steel Rod Clip ⚠ Made in the USA

⅜", 50/pk	F3SPK50	25.75
⅜", 100/pk	F3SPK100	49.75
½", each	F2S	0.75
½", 50/pk	F2SPK50	19.75
⅝", each	F5S	0.75
⅝", 50/pk	F5SPK50	14.95
⅔", 50/pk	F23SPK50	34.75
⅞", 50/pk	F7SPK50	11.75

Nylon Drive Caps ⚠

Help prevent splintering the ends of fiberglass rods when driving into the ground. The cap is also useful when pushing rods into the ground with your hands.

For ⅜" rod	F3N	9.95
For ½" rod	F2N	13.95

⅜" Steel Spring Clip ⚠ Made in the USA

Light galvanized, 50/pk	F3CPK50	12.75
Light galvanized, 100/pk	F3CPK100	22.75

Cotter Pins ⚠ Made in the USA

14 gauge, 5½", 100/pk	FCPCH	10.75
12½ gauge, 5½", 100/pk	FCPCR	12.75



FiberRod Fiberglass Posts ⚠

FiberRod posts, also known as "sucker rods," are bare fiberglass rods that make great, economical fence posts. These posts are available in 1" and 1¼" diameter and provide superior strength and integrity than smaller diameter fiberglass posts. FiberRods are self-insulated and require no insulators, simply drill holes and use cotter pins to secure electrified strands. Now available in precut lengths!

1" FiberRod, not drilled, per foot	F1R	1.95
1" FiberRod, not drilled, 5' length	F1R5	5.25
1" FiberRod, not drilled, 6, length	F1R6	6.25
1¼" FiberRod, not drilled, per foot	F1Q	2.25
1¼" FiberRod, not drilled, 5' length	F1Q5	6.75
1¼" FiberRod, not drilled, 6' length	F1Q6	7.75

⚠ California residents see page 2 for Proposition 65 Warning

SunGuard® Fiberglass Posts

Sunguard Fiberglass Posts have a protective coating to prevent yellowing and splintering. These posts are self-insulating, eliminating the need to replace damaged insulators and track down shorts at the fence post. They are lightweight yet durable and flex upon impact making them an ideal solution for rotational grazing.

⅜" SunGuard® Posts ⚠ Made in the USA

4'	F38-4SG	1.85
Save on 60		1.75
5'	F38-5SG	2.35
Save on 60		2.25
6'	F38-6SG	2.85
Save on 60		2.75

½" SunGuard® Posts ⚠ Made in the USA

4'	F12-4SG	3.75
Save on 60		3.45
4', drilled every 2"	F12-4D	4.15
Save on 60		3.85
5'	F12-5SG	3.69
Save on 60		4.15
6'	F12-6SG	5.15
Save on 60		4.85

⅔" SunGuard® Posts ⚠ Made in the USA

5'	F23-5SG	7.95
Save on 20		7.65
6',	F23-6SG	9.25
Save on 20		8.95
5', drilled every 2"	F23-5D	8.25
Save on 20		7.95
6', drilled every 2"	F23-6D	9.65
Save on 20		9.35
7', drilled every 2"	F23-7D	10.95
Save on 20		10.65
8', drilled every 2"	F23-8D	12.75
Save on 20		12.45

⅞" SunGuard® Posts ⚠ Made in the USA

5', drilled every 2"	F78-5D	11.75
Save on 20		11.45
6', drilled every 2"	F78-6D	13.75
Save on 20		13.45

⅜" Colored Fiberglass Rods ⚠

These highly visible rods can be used for portable grazing in the winter or as line markers for parking lots. UV-stabilized for weather resistance.

4', pink	F38-4P	1.65
5', pink	F38-5P	1.99
6', pink	F38-6P	2.25
4', yellow	F38-4Y	1.65
5', yellow	F38-5Y	1.95
6', yellow	F38-6Y	2.25

Items with this symbol do not qualify for free shipping.

O'Briens Treadaline Post ⚠

- High-strength, H-profile post
- 8 positions for polywire
- 4 positions for 1½" polytape
- Long, galvanized stake embedded above the foot peg for added strength
- Premium UV-stabilized polymers
- 43" overall length
- 3½" spike

Available in white, yellow, or blue.

Treadaline, white . . . . RRTW 6.45
Treadaline, white, 50/pk . . RRTWPK50 . . 259.75
Treadaline, yellow . . . RRTY 6.45
Treadaline, yellow, 50/pk . RRTYPK50 . . . 259.75
Treadaline, blue . . . . RRTBU 6.45
Treadaline, blue, 50/pk . . RRTBUPK50 . 259.75

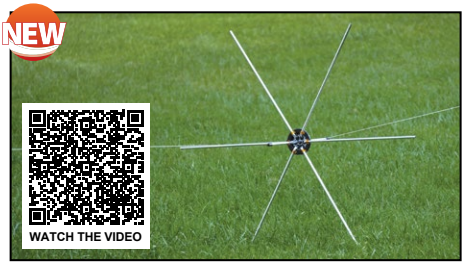

Gallagher Tumblewheel ⚠

The Tumblewheel rolls with you for quick and easy paddock moves, taking the place of step-in posts. Unique design ensures the two legs contacting the ground are neutralized while all others remain electrified.

Gallagher Tumblewheel . . . . . RGTW 99.75

Stirrup Posts ⚠

The RPPLS is our tallest step-in post at 62" total length. The top clip holds the fence 54" above the ground. Features 5 clips for wide polytape and 9 clips for rope, wire, and narrow polytape. Each has a 7" metal spike with 2 stabilizing ground spurs on the step bottom.

62" Stirrup Post, white . . RPPLS 11.75
Save on box of 20 . . . . . 10.75 each

Pigtail Step-In Post ⚠ Made in the USA

- Holds twine, tape, rope, or ribbon
- Class 3 galvanized steel shaft
- Durable, crimped foot pedal
- UV-stabilized plastic
- Insulator cap seals out water
- Total length: 40", 34½" above ground

Pigtail Step-In, white . . . . . RPTW 5.25
Save on box of 50 . . . . . 4.65 each

Patriot Heavy-Duty Tread-In, 49" ⚠

This heavy-duty plastic Step-in Post has an "H" profile that provides great rigidity. Integrated 8" solid steel spike ensures it can penetrate hard soils with ease. The specially molded foot and beveled base helps secure the post. It provides 8 clip positions that can handle twine, braid, tape (up to 1½"), or rope. The overall length is 49" including spike with 39" above ground. UV-Stabilized for long life. Box of 50 posts.

Step-In Post, white, 50/pk. . . TT-820013. . 218.75

Strainrite Three-Hole Reel Mounting Post ⚠

The Strainrite Three-Hole Reel Mounting Post is the ideal grazing tool when multiple strands are required. Simply remove handles from reels and bolt them directly to the mounting post, step the foot into the ground, and chain it to an anchor point. Reels not included.

Reel Mounting Post. . . . . RRMPR 52.75

Strainrite Reel Holder ⚠

Easily anchor reels to T-posts! Slide the holder onto the post and lock it in place. The reel hook then slides into the receiver and is secured with the locking tab.

Steel Post Reel Holder . . . . . RRHR 19.95

⚠ California residents see page 2 for Proposition 65 Warning

Electric Twine - 6 SS Conductors ⚠

White, Speedrite, 660' . . . . . R2W 20.75
White, Fencer's Choice®, 656' . . . . . R2GW . . .14.75
White, Speedrite, 1,650' . . . . . R5W 41.75
White, Fencer's Choice®, 1,640' . . . . R5GW . . .26.75

Electric Twine - 9 SS Conductors ⚠

White, Speedrite, 1,320' . . . . . R49W . . . 61.75
Black, Fencer's Choice®, 1,320' . . . . R49B 29.75
White, Fencer's Choice®, 1,320' . . . . R49GW . .29.75
Orange, Fencer's Choice®, 1,320' . . . R49GO . .29.75

Stainless-Steel Mini-Spring ⚠

Used to tension twine, ribbon, 19 gauge wire, or aluminum wire. Works like the larger springs for high-tensile wire, but designed for low-tension, light, temporary, or permanent fences.
Total length: 7½".

Stainless Mini-Spring. . . . . HMSS 4.50

Stainless-Steel Splice Buckle ⚠

Use with electric tape or ribbon up to 1" wide.

Splice Buckle . . . . . RSB 0.75

Fencer's Choice® Braided Electric Twine ⚠

The preferred choice by many professional graziers today. If you are using electric twine for interior fences and moving them often, you will appreciate the ease in which this product winds onto a reel. Braided twine has a higher breaking strength than regular twisted twine. The interlocking nature of braiding also helps to maintain conductivity by reenergizing broken conductors. Choose from either 9 stainless-steel conductors (RBT49SSW) or the super-conductive mixed metal with 6 stainless-steel and 3 tinned-copper conductors (RBT46S3CW or RBT86S3CW).

White, 9SS, 1,320' . . . . . RBT49SSW . . . 41.75
White, 6SS & 3CU, 1,320' . RBT46S3CW . . 49.75
White, 6SS & 3CU, 2,640' . RBT86S3CW . . 91.75

½" Electric Ribbon ⚠ Made in the USA

Electric ribbon is ideal for portable or temporary fence. Six stainless-steel conductors and UV-stabilized polyethylene provide long life and durability. It is important to use a low-impedance fence energizer with this type of fence material. All energizers sold by Kencove are low-impedance.

White, 1,320', 6 SS. . . . . .RW4G. 43.75
White, 656', 6 SS . . . . . .RWRG 21.75

Twist-Tight Tensioner ⚠

Excellent for taking up slack on light-gauge wire, twine, and ribbon fences without cutting the fence. It is easy to readjust tension. Made of durable plastic.

Twist-Tight Tensioner, 6/pk . . . . . RTT 3.95

Strainrite Blackhawk Reel ⚠

The Blackhawk features a 3:1 ratio for speed and efficiency. Made with durable, UV-resistant materials tough enough for life on your farm or ranch. One unique feature of this reel is the reel stabilizer which allows you to lock the reel in place on an existing fence line or high tensile perimeter. Holds 1,640' of twine or 656' of ½" tape.

BlackHawk 3:1 Reel . . . . . RRGR 65.25

Mini-Reel ⚠

Uses a lynch pin that allows the spool to be replaced with no tools required. The low cost and compact size make this reel ideal for trail rides, gardens, and paddock divisions. Holds up to 350' of electric ribbon or 820' of electric twine.

Mini-Reel . . . . . RMININ 14.95
Replacement Spool . . . . . RMINIBN 5.95
Mini-Reel w/ 660' Polywire . . . RM2PW 26.99

Twine/Tape Guides ⚠

A steel guide can replace the stock, plastic guide and quickly bolts to the reel frame. Fits O'Briens (RRS and RRSGO), Blackhawk (RRGR), and similar reels with 6" wide bobbins and metal frames.

RRS, RRSG, RRSGO, RRGR Guide . . RRWG . . . 7.25
RRX/RRXG Guide . . . . . RRWGX . . 7.25
Plastic Replacement Guide . . . . . RRSGG . . 7.25

O'Briens Classic Reel ⚠

O'Briens Classic reels are available in 1:1 and 3:1 gearing ratios. Classic reels hold up to 660' of ribbon or 1,640' of twine and feature an easy-grip PVC handle, twine guide, and built-in hook. These reels are designed to hang directly on a perimeter fence and come with a non-conductive gate handle.

O'Briens Classic 1:1 Reel . . . RRS 70.75
O'Briens Classic 3:1 Reel . . . RRSGO 74.25

O'Briens Mega-Reel ⚠

Extra-large reel with standard 1:1 gearing, holds 460' of tape, 1,312' of ribbon, or up to 2,625' of electric twine. This reel has a galvanized crank handle mounted on nylon bushings to reduce wear. The 1-piece molded spool makes this reel durable.

O'Briens 1:1 Mega-Reel . . . . . RRX. 82.25
O'Briens 3:1 Mega-Reel . . . . . RRXG 86.25

O'Briens Replacement Bobbins ⚠

O'Briens Classic Reel Bobbin . . RRSOB . . . 26.75
O'Briens Mega-Reel Bobbin . . . RRXOB . . . 33.75

Economy Reel ⚠

Low-cost reel that has about the same capacity (1,650' of twine) as the RRSG and RRS.

Design features include easy bobbin replacement, rugged handle hook, and replaceable nylon bushings for smooth winding. Not the reel for the demanding grazier.

Economy Reel . . . . . RRB 22.75

⚠ California residents see page 2 for Proposition 65 Warning

KIWITECH
INTERNATIONAL LIMITED

NEW

The Kiwitech product line offers the most versatility and customization of any grazing system on the market. With modular and interchangeable parts, you can build geared winders, carry packs, posts, and braces to meet your specific livestock needs.

Kiwitech Carry Packs ⚠

With a Carry Pack you can set up and tear down paddocks, deploy and collect posts, and pay out and rewind twine all with the same efficient pack. This kit requires assembly and includes a gearbox assembly, chuck, guide, crank handle, pedestal, rack, and shoulder strap. Components can be upgraded or replaced at any time.

Single Carry Pack . . . . . KT-PACC1 . . . . . 239.75
Double Carry Pack. . . . . KT-PACC2. . . . . 324.75
Triple Carry Pack . . . . . KT-PACC3. . . . . 349.75

Kiwitech Winders ⚠

Modular, geared reel with a 4:1 gear ratio, for more efficiency than the typical 3:1 geared reel. This kit requires assembly and includes a gearbox assembly, chuck, guide, crank handle, and carrying handle. Components can be upgraded or replaced at any time.

Single Winder. . . . . KT-WIND1HD 126.75
Double Winder . . . . . KT-WIND2 . . . . . 174.75

Kiwitech Tools & Acessories ⚠

General Kiwitech tools and accessories.

Single Wedge Applicator . . . . KT-APWS. . . 32.75
Double Wedge Applicator . . . KT-APWD. . . . 7.25

Kiwitech Water Troughs ⚠

Portable and compact water troughs for pressurized systems for small and large herds.

Micro-Trough . . . . . .KT-MICHILLEND 59.75
Drag Trough, 100L. . . . . KT-R100 . . . . . 399.75

⚠ **Items with this symbol do not qualify for free shipping.**

KIWITECH CONTINUED

Chucks ⚠

The chuck slides over the spindle of the gearbox and holds your spool of twine on Kiwitech Winders and Carry Packs. Adjustable drag control makes for tangle-free rewinding.

Single Chuck	KT-CHK1	18.75
Double Chuck	KT-CHK2	49.75
Triple Chuck	KT-CHK3	58.75

Twine Guides ⚠

Guides mount to the front of the gearbox to guide twine and prevent tangles while paying out or winding up twine with Winders or Carry Packs.

Single Guide	KT-GU1	13.75
Double Guide	KT-GU2IN	56.75
Triple Guide	KT-GU3IN	61.95

Winder & Pack Accessories ⚠

Accessories for use with Kiwitech Winders and Carry Packs. Spools available both empty and pre-loaded with quality Kiwitech polywire.

Post Rack	KT-RK	121.75
Carry Handle	KT-CHASHD	23.75
Snap-In Handle	KT-HDSNAP	5.75
Gearbox	KT-GXSET	51.75
Gearbox Crank Handle	KT-CRNK	16.75
Spool	KT-SPLBARE	27.75
Spool, 6SS Polywire, 656'	KT-SPL200	52.75
Spool, 6SS Polywire, 1,312'	KT-SPL400	76.75
Polywire, 6SS, 1,312'	KT-PWR400	49.75

Post Accessories ⚠

Modular accessories used to set up line posts, corners, and gate openings.

HD Strainer Handle	KT-HDSTRN	10.25
Release Hook	KT-RELHK	4.25
Pedal w/ Short Pin	KT-PDSH	2.39
Pedal w/ Long Pin	KT-PDLG	3.75
⅜" Single Wedge, 50/pk	KT-WD3/8-50	16.25
⅜" Dbl Wedge, Clip, 50/pk	KT-WCLPD3/8-50	41.75
10mm Dbl Wedge, Clip, 50/pk	KT-WCLPD10-50	36.25

⚠ California residents see page 2 for Proposition 65 Warning

Deer Netting - Exclusion Fence

- 2" x 2" openings
- UV-resistant polypropylene
- Virtually invisible among vegetation

Our Deer Net is an excellent choice for keeping deer and other unwanted animals out of yards, gardens, and orchards. In many cases, layering this physical barrier with an electrical deterrent will significantly increase effectiveness. Much lighter and easier to install than woven wire, this netting can be installed on wood posts, fiberglass rods, or t-posts.

Tenax Plastic Deer Netting

4' x 165'	DN4165	76.25
4' x 330'	DN4330	142.25
6' x 165'	DN6165	114.25
6' x 330'	DN6330	227.25
8' x 165'	DN8165	137.25
8' x 330'	DN8330	274.25

Due to size and weight restrictions, 8' Deer Netting must be shipped by truck. It cannot be delivered by FedEx.

Hog Rings ⚠

The Hog Ring gun uses collated strips of 50 heavy-galvanized steel hog rings. This self-feeding tool fits comfortably in your hand and is easy to load and operate, even in tight spaces. This is a very helpful tool for any farm, ranch, or homestead.

Economy Hog Ring Gun, 11/16"	THGC	31.75
11/16", 16 ga C-rings, 2,500/pk	CHRC	11.95

Monofilament ⚠

Monofilament is an alternative to wire that is ideal for trellis systems. This material is strong, easy to work with, and compatible with Gripple hardware.

10 ga, 2,448' Roll	DNC10S	91.75
12½ ga, 5,770' Roll	DNC12.5S	149.95

Ground Staples ⚠

Effective in preventing unwanted animals from crawling under the fence. Monofilament wire may be used for support or reinforcement.

6" Ground Staples, 250/pk	DGS	16.75
6" Ground Staples, 1,000/pk	DGSK	56.75
8" Nylon Cable Ties, 100/pk	DNCT8	3.95

GET GREAT DEALS
ON Z-1
EAR TAGS!

⚠ **Items with this symbol do not qualify for free shipping.**

INSTALLING ROPE FENCE

1. INSTALL FENCE POSTS

After careful consideration and planning, start by installing end and corner posts. They should be a minimum 5" diameter and set 3' to 4' in the ground. These posts can be either concreted (allow concrete to cure before tensioning) or driven into the ground. Round posts are stronger and less likely to warp than square posts.

2. CORNER INSULATORS

Attach lag screws (ILCW) to end posts, and use Corner Collar™ Insulators (ICPW) on corner posts. Attach and pay out one strand of rope (RO4) as a guide. You can use this guide for placement of line posts, which are typically spaced 10' to 15' apart.

The number of strands and spacing you use depends on your livestock and conditions. The most common rope fence Kencove sells is 4 strands. The rope can be run as one continuous length or cut and spliced at every end.

3. LINE POST INSULATORS

Using 20", 10", 10", 10" spacing from the ground up creates a 50" high fence. Attaching insulators to the line posts is part science, part art. After marking each post, but before permanently attaching insulators, step back and adjust out peaks or valleys. This will enhance the smooth flow of your rope fence. Pull all strands tight and secure with a Rope Clamp (CWBT). Final tensioning can be done with an inline tensioner (SSDR).

4. ELECTRIFY THE FENCE

Install a low-impedance energizer. To ensure continuity of the electric pulse, individual ropes must be connected. Leftover rope can be used, or a Kencove Rope-to-Rope Electric Jumper (CRR) will ensure good continuity.

ANIMAL SAFETY

The safety of your animals is dependent on electrification of this fence. Be sure to use a low-impedance energizer. Have the energizer working before animals are put into the pasture. If possible, introduce the animals to the perimeter of their new home before turning them loose.

⚠ California residents see page 2 for Proposition 65 Warning

Two-Bolt Rope Clamp ⚠

A versatile connector that is strong enough to be used as a splicer where an opening is occasionally needed, like at a utility right-of-way. The wires can be placed parallel in the clamp to allow quick, low-tension joints for flood areas or safety. Powder-coated steel. Total length: 2¼".

Two-Bolt Clamp, 3/pk. . . . . CWBT 4.75
Lag-Screw Insulator. . . . . ILCW 2.35
Secure Lag-Screw Insulator . . . . ILCS 2.35

Fencer's Choice® Braided Electric Rope ⚠

Fencer's Choice® Braided Electric Rope is easy to install, highly visible, and very strong. Made with UV-stabilized polyester and stainless- steel conductors, the interlocking design maintains conductivity by reenergizing broken conductors. This high-strength, long-lasting braid is ⅓" diameter and comes on a 1,320' easy-payout spool.

9SS, 1,742 lb break strength . . RB49SS . 149.75

Fencer's Choice® Electric Rope, 656' ⚠

Fencer's Choice® Electric Rope is made with UV-stabilized polyethylene to resist weathering. 6 stainless-steel conductors provide high conductivity, durability, and won't turn green. Electric Rope creates a highly visible electric fence that is much more visible than wire. It does not require braced end posts, and it is easy to hand knot. Because round rope doesn't wind-whip as much as electric ribbon, post spacing can be up to 30' apart. The high breaking strength allows it to handle abuse. Rope also works well for making electric gates.

¼" dia., 525 lb break strength . . . . RO4. . . 48.75

EZ-Daisy Tightener ⚠

Tighten slack in your rope fence with this low-tension strainer. The white, powder-coated finish provides high visibility and weather resistance.

EZ-Daisy Tightener . . . . . .SSDR. 3.65
EZ-Daisy Handle . . . . . .TFD 7.45

Material List

Fence Energizer	Page 24-27	Rope Fence	Page 69
Ground System	Page 31	Gate(s)	Page 54-57
Underground Wire	Page 31	Cut-Out Switch	Page 30
Corner/End Post	Page 42	Electric Fence Sign	Page 30
Wood Post Line Insulators	Page 35	Electrical Connectors	Page 30
Lag-Screw Insulators	Page 34	Inline Splicer	Page 70
Corner Collar™ Insulators	Page 70, 72	Inline Tightener	Page 69
Portable Fence Post	Page 60-62	Rope Clamp	Page 69

⚠ Items with this symbol do not qualify for free shipping.

Electric Bungy Gate ⚠

- Safer and more visible than spring gates
- Elastic cord stretches up to 20'

Bungy Gate . . . . . GSR 14.95

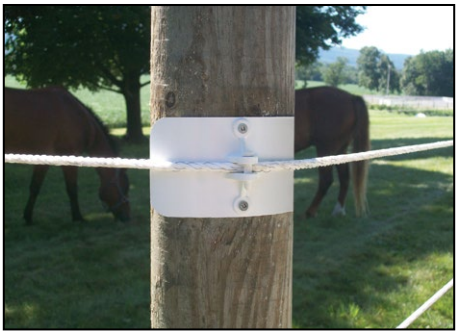

Fencer's Choice® Corner Collar™ ⚠

Fits perfectly onto any corner wood post to make insulating around corners a breeze. Made from durable, UV-resistant plastic, the Collar holds most sizes of fence wire, including large diameter rope and Hotcote®.

Corner Collar, white, 10/pk, ... ICPW 9.95
Corner Collar, black, 10/pk . . . . . ICPB 9.95

Tape Gate Kit ⚠

Heavy-duty gate handle with insulators and handle hookup. Use with 1.57" electric tape (sold separately).

Tape Gate Kit, white. . . . . GTK 6.50
160' Electric Tape, white . . . . . GTTW 22.50
Tape Gate Buckle . . . . . GTB 1.95

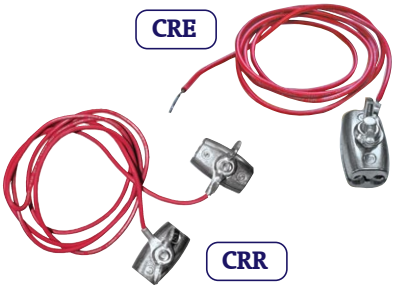

Fencer's Choice® Splice Buckle ⚠

- For terminating or splicing
- Installs quickly and easily

Splice Buckle, 1¼". . . . . .CRC 1.75

Electric Rope Connectors ⚠

Rope-to-Rope Connector . . . . . CRR 5.25
Rope-to-Energizer Connector. . . . CRE. 3.95

Speedrite X-Braid ⚠

Speedrite Electric Braid is made with 4 stainless-steel conductors plus 4 tinned-copper conductors to provide maximum strength and conductivity. This heavy-duty braid is designed for long lengths of highly visible and safe fence.

X-Braid, 660', white/red . . . . . RB2. . . . . 124.75

Designed For Long Lengths of Semi-Permanent Fence

⚠ California residents see page 2 for Proposition 65 Warning

Fencer's Choice® Electric Tape ⚠ Made in the USA

- Highly visible, 1.57" wide
- Safe & effective for horses
- 13 stainless-steel conductors
- UV-stabilized polyethylene

656' per roll, white . . . . . JGW. 49.75
656' per roll, black . . . . . JGB 49.75

Electric Tape Fence Accessories ⚠

Clamp Tightener, white . . . . . JEEW . . 2.25
Clamp Tightener, black . . . . . JEEB . . . 2.25
Flip-Top Insulator, white, 25/pk . . . . . J16W . . . 8.95
Flip-Top Insulator, black, 25/pk . . . . . J16. . . . . 8.95
Tape-to-Tape Connector, SS, each . . . . . CTT 4.95
Tape-to-Energizer Connector, SS, each . . . . . CTE 4.95

Poplar Board Fence ⚠

Ideal if you want a rustic wood fence look. Easy to install and repair. Life expectancy is not as long as other fence types such as wire or Horserail®. Using an offset electric wire to prevent cribbing may extend the life. Treated with ACQ or equivalent.

1" x 6" x 16' . . . . . PB16 . . . . . 17.75
Save on bundle of 105 . . . . . 16.75
Save on 4 bundles 16.25
Save on 12 bundles 15.75

Items with this symbol do not qualify for free shipping.

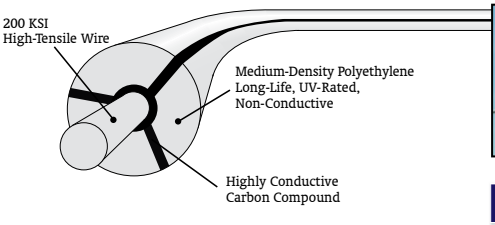

HOTCOTE®

Coated electric wire

Hotcote® ⚠ Made in the USA

A coated fence wire similar to Kencote but with the addition of 3 black carbon strips extending to the surface to carry an electrical charge. Although most animals will test any type of fence, this system has a combination of visibility and electric to ensure the safest containment possible. The polyethylene coating prevents bare wire from injuring animals. Recommended post spacing is 16 feet.

20-Year Limited Factory Warranty

1,320' coil, white	WSWH	233.95
Save on 5 rolls		229.95
1,320' coil, brown	WSWBR	248.95
Save on 5 rolls		244.95
1,320' coil, black	WSWBL	248.95
Save on 5 rolls		244.95

Available colors (color may vary slightly):

White (H) Brown (BR) Black (BL)

KENCOTE™

The most visible coated wire available

- 200 KSI, 12½ gauge, high-tensile wire core
- UV-resistant, polyethylene-coated wire
- Molecularly bonded

Kencote™ ⚠ Made in the USA

An attractive, affordable fence system requiring very little maintenance. It can handle animal impact and harsh weather conditions without permanent elongation. Our coated wire fence is manufactured with high-tensile wire molecularly bonded to UV-resistant polyethylene. This creates a durable physical barrier with just enough give and more than enough strength to provide optimum safety for horses. Recommended post spacing is 16 feet. ***This wire is not electrifiable.***

30-Year Limited Factory Warranty

1,320' coil, white	WTW	211.95
Save on 5 rolls		207.95
1,320' coil, brown	WTBR	226.95
Save on 5 rolls		222.95
1,320' coil, black	WTBL	226.95
Save on 5 rolls		222.95

Wide Staples ⚠

Wide, 2" staples, 46/lb	HB2W	3.99/lb

ELECTRIC INSULATORS ⚠

4" Hotcote Insulator, 100/pk.	I4H4*	9.25
Hotcote Tubing, 100'	I4H*	15.95
Pin-Lock Insulator, white, 25/pk.	I8PW	8.25
Pin-Lock Insulator, black, 25/pk	I8P	8.25
Claw Insulator, white, 25/pk.	ICCW	8.25
Claw Insulator, black, 25/pk.	ICCB	8.25
5½" Offset Insulator, white, 10/pk	IT6W	9.45
5½" Offset Insulator, black, 10/pk	IT6B	9.45

* Indicates White (W), Brown (BR), Black (BL)

Fencer's Choice® Corner Collar™ ⚠ Made in the USA

Fits perfectly onto any corner wood post to make insulating around corners a breeze. Made from durable, UV-resistant plastic, the collar holds most sizes of fence wire including large diameter rope and Hotcote.

Corner Collar, white, 10/pk,	ICPW	9.95
Corner Collar, black, 10/pk	ICPB	9.95

Hotcote®, HotTop®, and Horserail® are registered trademarks of John Wall, Inc.

⚠ California residents see page 2 for Proposition 65 Warning

Wire Tensioner

- Specifically designed for coated wire
- Galvanization/powder coating resists rust
- Use to tension Hotcote or Kencote

Coated Tensioner, white . . . . SCWTW 11.75
Coated Tensioner, brown. . . . SCWTBR . . . 11.75
Coated Tensioner, black . . . . SCWTB. 11.75

2" Spooler Handle Set

Includes handle, 2 customized ratchets, and spooler pin. Designed to fit coated wire tensioner (SCWTW, SCWTBR, SCWTB).

2" Spooler Handle Set . . . . . THS2 . . . . . 99.75

KIWI® Strainer with Quick-End

- Eliminates need for crimp sleeves
- Use with 12½ gauge wire
- Reduces stripping of coated wire

KIWI® Strainer with Quick-End . . . SASQ. . . . 6.15

Hotcote® Insulated Buckles

Straight Buckle: terminating on square posts or intersecting buildings.

45 Degree: terminating on round posts.

Hot dip galvanized and powder coated.

Straight Buckle, black . . . . . SCABL 5.95
Straight Buckle, brown. . . . . SCABR. 5.95
Straight Buckle, white . . . . . SCAW. 5.95
45 Degree Buckle, black . . . . SCA45BL 5.95
45 Degree Buckle, brown . . . SCA45BR. . . . 5.95
45 Degree Buckle, white . . . . SCA45W 5.95

Safety-Loop Wire Connector

The fastest, easiest way to terminate coated wire. The amount of coated wire required to strip is greatly reduced. Simply feed the wire through the Safety-Loop, wrap around post, and insert into the spring-loaded end. Use to terminate Kencote or to build safe brace units.

Safety-Loop, white. . . . . CWTW. 3.55
Safety-Loop, brown . . . . . CWTBR 3.55
Safety-Loop, black. . . . . CWTBL 3.55

Safe-T-Brace Cable Kit, 10'

This kit is made from pre-straightened high tensile wire and has a curved radius on the pre-bend. Twisted for superior strength, this kit has 4-times the corrosion protection as Class 3 galvanized coating. It saves time, lasts a long time, and has no entapments or pinch points.

Brace Kit. . . . . HQSTB 21.75

Material List

Hotcote (1 coil per 1,320' of perimeter) x (# of lines)	Page 72
Kencote (1 coil per 1,320' of perimeter) x (# of lines)	Page 72
Crimp Sleeves, 12½ ga, 100/pk	Page 20
KIWI® Strainer with Quick-End	Page 73
Barbed Staples, Wide, 2"	Page 16
Claw Insulators (1 per corner) x (# of lines of Hotcote)	Page 36
Corner Collars (1 per corner) x (# of lines of Hotcote)	Page 72
SS Screws, 1¾", 1,250-pc bucket (2 per insulator)	Page 36
Safety-Loop Connectors	Page 73
Quick-Brace, 12'	Page 17
Hotcote Tubing, 100' (1 coil for every 10 braces)	Page 72

Items with this symbol do not qualify for free shipping.

HotTop® Plus

Made with the same flexible polyethylene and high-tensile wire as Horserail but with the added benefit of electrification. The signature spark of HotTop Plus is made possible by strips of highly conductive carbon running along the top and bottom wires. When partnered with a high-quality, low-impedance energizer, it creates an electrified physical and psychological barrier. Self-preservation is an important feature of HotTop Plus. The electrification discourages horses from cribbing or reach-through behaviors, minimizing the abuse the fence will take, and thus extending its life. While Horserail is designed to safely resist impact, the zap of HotTop Plus provides an additional incentive for horses to stay off the fence to significantly reduce the chance of any injury or fence damage. UV-resistant polyethylene resists weathering. Available in 4¼" and 5¼".

10-Year Limited Factory Warranty

4¼" HotTop Plus, 660'	WRH4*	599.75
Save on 12 rolls		579.95
5¼" HotTop Plus, 660'	WRH5*	664.75
Save on 10 rolls		644.75
4¼" Insulated Line Bracket	WRHBL4*	3.95
5¼" Insulated Line Bracket	WRHBL5*	4.25
4¼" Insulated Pre-Bent Buckle	WRHEB4*	12.95
5¼" Insulated Pre-Bent Buckle	WRHEB5*	13.95
4¼" T-Buckle	WRHTA4*	21.75
5¼" T-Buckle	WRHTA5*	23.25
4¼" 90-Degree Bracket	WRHB94*	12.75
5¼" 90-Degree Bracket	WRHB95*	14.75

* Indicates White (W), Brown (BR), Black (BL)

Ponyrail

PonyRail is an attractive and eye-catching 1" wide rail. Made with 14 gauge high-tensile core and high-quality polyethylene coating, it is designed to keep costs down while maintaining appearance, safety, and extra-long life. 12-year limited manufacturer's replacement warranty.

1" Ponyrail, 750'	WR4*	125.00
Shorts	WR4*FT	0.10/ft

* Indicates White (W), Brown (BR), Black (BL)

Donalds-Style Strainer	SDS	4.25

Items with this symbol do not qualify for free shipping.



Hotcote®, HotTop®, and Horserail® are registered trademarks of John Wall, Inc.

California residents see page 2 for Proposition 65 Warning

30-Year Limited Factory Warranty

Horserail®

Made with UV-stabilized, premium-grade polyethylene on prestraightened high-tensile galvanized wire. Has a long life, and requires little maintenance. The 4" rail has 12½ gauge, 180 KSI wire molded into the top and bottom, while the 5" and 6" rail has 3 wires: top, bottom, and center. Rail and accessories available in white, brown, and black.

6" Horserail®

6" Horserail, 660', white. . . . .WSR6W 721.75
6" Horserail, 660', brown . . . .WSR6BR . . . 721.75
6" Horserail, 660', black. . . . .WSR6BL . . . 721.75

5" Horserail®

5" Horserail, 330', white. . . . .WSR5W3. . . . 332.75
5" Horserail, 330', brown . . . WSR5BR3 . . . 332.75
5" Horserail, 330', black. . . . WSR5BL3 . . . 299.75
5" Horserail, 660', white. . . . .WSR5W. 622.75
5" Horserail, 660', brown . . . WSR5BR 622.75
5" Horserail, 660', black. . . . WSR5BL 560.75

4" Horserail®

4" Horserail, 330', white. . . . .WSR4W3. . . . 224.75
4" Horserail, 330', brown . . . WSR4BR3 . . . 249.75
4" Horserail, 330', black. . . . WSR4BL3 . . . 249.75
4" Horserail, 660', white. . . . .WSR4W. 405.75
4" Horserail, 660', brown . . . WSR4BR 449.75
4" Horserail, 660', black. . . . WSR4BL 449.75

Bent Buckles

4" . . . . . .WEB4*. 11.25
5" . . . . . .WEB5*. 11.75
6" . . . . . .WEB6*. 12.25

Flat Brackets

4" . . . . . .WSBL4*. 3.95
5" . . . . . .WSBL5*. 4.25
6" . . . . . .WSBL6*. 3.95

Splice Buckle

4" . . . . . .WSB4*. . . . 11.75
5" . . . . . .WSB5*. . . . 12.75
6" . . . . . .WSB6*. . . . 12.25

Flat Buckles

4" . . . . . .WEBF4*. 13.25
5" . . . . . .WEBF5*. 13.75
6" . . . . . .WEBF6*. 14.25

Inside 90° Brackets

4" . . . . . .WSB94* . . . 8.25
5" . . . . . .WSB95* . . . 9.25
6" . . . . . .WSB96* . . . 9.95

Split Spooler

4" . . . . . .WSSS4* . . 16.75
5" . . . . . .WSSS5* . . 18.25
6" . . . . . .WSSS6* . . 19.25

T-Buckles

4" . . . . . .WST4* 11.25
5" . . . . . .WST5* 12.95

Bend Tools

4" . . . . . WBT4 . . . . 14.75
5" . . . . . WBT5 . . . . 15.75
6" . . . . . WBT6 . . . . 16.75

Spooler Handle

includes handle, 2 customized ratchets, and spooler pin.

Handle Set . . . THS*. . . . 99.75
* Indicates size: (2", 4", 5", 6")

*** Indicates color:**

White (W) Brown (BR) Black (BL)

Horserail® & HotTop® Plus Hardware

½" x 5" Galv. Lag Screw . . . WEBB5. . . 0.99
⅜" x 4" Galv. Lag Screw . . . WEBBS. . . 0.65
1¾" SS Screws, 50/pk. . . . . HSS175 . . 3.75
2" Bracket Screw, 500/pk . . HSJWBK* 49.75

Items with this symbol do not qualify for free shipping.

INSTALLING HIGH-TENSILE FENCE

Whether it's the boundary that makes a good neighbor, a subdivision to control livestock and protect crops, or to safeguard against predators, any farmer knows the value of a good fence. High-tensile fence is an effective, reliable, low-cost solution. Compared to non-electric fences, you'll enjoy savings by using wide post spacings (20' to 50') and lighter end bracing. Six high-tensile wires are not easy to get through, are almost impossible for animals to break, and often last up to 40 years.

Before you begin, check local laws and regulations pertaining to fencing, and locate potential hazards such as underground utility lines and overhead electric wires. Make sure the fence path is clear of brush and debris.

WATCH OUR VIDEO SERIES:
HOW TO BUILD
HIGH-TENSILE FENCE

1. CALCULATE LENGTH

In planning a new fence, the first step is to find the length. An easy and economical way to measure footage is to step off a known distance (such as the length of a barn) and calculate the length of your average step. You can save time and get a more accurate measurement by using a measuring wheel.

Draw a rough map of the fence showing lengths, gates, ends, corners, and other special terrain considerations you may have. This is an excellent visual aid and will go a long way toward keeping you organized.

Refer to the acreage chart (page 78) for approximate perimeter footage compared to acreage. Use this chart for educated guessing only. It is always best to measure the fence line distance as accurately as possible in order to purchase the correct amount of materials.

Remember, when the fence around a square pasture is doubled in length, there is four times as much land inside. An easy way to remember the square footage in an acre is to remember there are 640 acres in a square mile (5,280' x 5,280' divided by 640 acres = 43,560 sq ft/acre). The materials list for our 15 acre, 3,280' perimeter example fences have supplies for 3 corners and 2 ends. With more than ½ mile of fence, there are 2 sets of inline wire tighteners for each strand.

2. INSTALL END/CORNER POSTS

The first posts to install are the 5" to 6" diameter (measured at the small end) corner and end posts. It is best to lean the posts 2" to 4" away from the pull of the wire. This will help prevent uplift in the future. Lifting is the most common problem of end and corner posts.

The end and corner posts need to be placed below the frost line, at least 3' into the ground. The lower third of the hole should be concreted, if hand set, to keep the post from lifting out of the hole.

The biggest labor-saving tool is a hydraulic post driver. Posts are set very quickly and tightly. Tractor-mounted drivers start at about $2,500. If you have a lot of fence to build, it will pay for itself in labor savings alone. Kencove rents post drivers to local customers, but you may have a neighbor willing to rent one to you. Some contractors are willing to just drive the posts.

3. INSTALL GUIDE WIRE

Installing the guide wire is next. This will be the lowest strand of fence wire and serves as a guide for setting line posts. If you need to carry the coil of high-tensile wire any distance, set the wire flat on the ground and step into the center hole. The coil feels much lighter when you have 2 hands holding it and the weight is centered on your feet. Place the coil on the spinning jenny and pull out the starting end of 12½ gauge wire. Snap locking pliers onto the end of the wire and walk along the fence line, being careful to pull at a steady pace and gradually slow down to stop. You can pull around several corners without tying off. Do your termination by crimping with two C23 sleeves or one C2L sleeve. This will maintain the full strength of the wire and also makes a neater connection. We do not recommend hand-tied knots as they are difficult and up to a third of the breaking strength of the wire can be lost.

Go back to the end post near the spinning jenny. Pull the slack out of the wire and cut it so you have enough to tie the line off at that end post. Attach it using crimp sleeves. When you cut high-tensile wire, push the cut ends of wire into the ground to keep the wire from recoiling. Move to the frictional center of the line.

Pull on the wire to remove slack. Cut the wire, then thread 2 crimp sleeves onto 1 wire end. Put the wire through the hole in the strainer's strap, bend it around, insert the end through the other holes in the crimp sleeves, and crimp them. A slight bend in the wire will facilitate insertion into the crimp sleeve. The other wire end goes into the hole on the strainer's spool. Don't crimp the wire into the hole of the spool or put the wire too far through the hole (¼" out of the other side is enough). Using your strainer handle, tighten the wire by turning the spool (try not to leave so much slack that the spool is too full). This is your guide wire for setting the other posts, so try to make sure it is straight.

4. INSTALL LINE POSTS

Mark desired post spacing on the ground 20' to 50' apart. Install remaining line posts about ½" away from the guide wire. Normally these posts should be positioned so the animals push the wire toward the posts. The wire should be on the inside of the fence, closest to the animals. The only exceptions are on the corners, where the wires should be on the outside of the posts.

5. BUILD BRACES

First, mark wire spacing on the vertical brace and end or corner posts. Halfway between the top and second wire marks, drill a ⅜" hole 2" deep into the end post. Insert the 5" brace pin where the horizontal post will be. Drill a 2" deep hole into one end of the horizontal rail. Next, drill a hole through the second vertical brace post for a 10" brace pin.

Put the horizontal post onto the stub of the 5" pin. The 10" pin is then driven through the second post into the other end of horizontal rail. Leave a 2" stub for the second rail on a double brace assembly. The 10" pin stub can also be used to catch the 2 or 3 loops of the diagonal brace wire.

Drive a staple for the brace wire 2" above the ground on the outside of the end post. Leave ½" sticking out. Attach the wire to an inline strainer and make 2 complete diagonal loops around the brace posts. These loops should cross each other in a figure-8 shape. The staple should be holding the wire at the base of the end post. The inch-long stub of ⅜" x 10" brace pin should be holding the brace wire up to the height of the brace rail on the second post. Cut the wire and take up the slack with the inline wire tightener. As an alternative, you could also use a Quick-Brace.

6. INSTALL REMAINING WIRES

Begin pulling the second fence wire out, stopping along the way to install the brace wires for any corners and at the other end assembly. At the far end post, install a wraparound insulator before tying off. This wire will be tied off in the same manner as the guide wire (first wire). Remember, this wire will have wraparounds on the corner posts and tube insulators on the line posts. Count the posts. Keep track of how many are on each side of each corner. This will be important when threading the tube insulators (1 for each line post) and wraparounds (1 for each corner post) onto your wire. You could also use the Spiralator insulator, which can be installed after the wire is tensioned.

Cut the wire at the spinning jenny end post and thread the proper number of 4" tube insulators and wraparounds onto the wire in the order they will be used. This was figured when counting posts between corners. Include a few extra tubes in case they are needed at the brace wire on the end assemblies. They can be used to insulate your fence wire where it might touch any brace wires. Staple the bottom 2 wires to the posts. The staples should be placed over the tubes with the flat side against the post and the fins facing you. Drive the staples until they compress the fins slightly, but not so tight that they pinch the wire.

It is best to put staples horizontally above and below the wraparound insulator rather than straddling it. Finish installing wires, insulators, and inline wire tighteners.

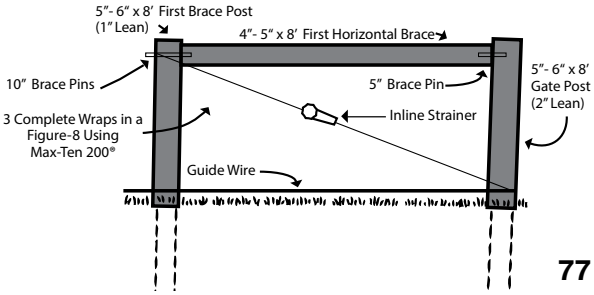

Wraparounds and tube insulators are only needed on the wires you will electrify. It is common to put a tension indicator spring onto one or more of the wires at the inline wire tighteners. 250 pounds is the recommended tension on non-electric-style fences. The first notch on the heavy-duty tension spring tug indicates about 150 pounds of tension. Tighten the wire until the end of the spring exposes 2 notches which equals about 250 pounds of tension.

If you know of a weak area in the fence, only tighten the wires enough to keep them from sagging. When you can't tighten to the full 250 pounds of tension, it becomes more important to keep the fence electrified. Wide line post spacing also requires electric to be on more frequently.

This gives you a brief overview of a basic 6-wire fence. Of course, these instructions can be adapted to fences of varying numbers of wire. If you want to use more than 6 wires, you should build double end and corner braces. Suggestions regarding installation or maintenance are only a phone call away.

Use the acreage chart below for approximate perimeter footage compared to acreage. It is always best to measure the fence line distance as accurately as possible in order to purchase the correct amount of materials.

Acreage Chart						
Acres	**2.5**	**5**	**10**	**20**	**40**	**80**
Feet	1,320	1,867	2,640	3,733	5,280	7,467
(square pasture)						
Feet	1,400	1,980	2,800	3,960	5,600	7,920
(pasture 2-times as long as it is wide)						
Feet	1,650	2,333	3,300	4,667	6,600	9,333
(pasture is 4-times as long as it is wide)						
Feet	2,100	2,970	4,200	5,940	8,400	11,880
(pasture is 8-times as long as it is wide)						
Feet	2,805	3,967	5,610	7,933	11,220	15,867
(pasture is 16-times as long as it is wide)						

HELPFUL FENCE TOOLS

Material List

Spinning Jenny to Dispense Wire	Page 12
Strainer Handle for Wire Tighteners	Page 15
4-Slot Crimp Tool	Page 21
Chain Grab to Tension Wire	Page 23
Wire Cutters	Page 22
Wire Twist Tool	Page 11
Drill Bit for Brace Pins	Page 17

12½ Gauge High-Tensile Wire	Page 4-5
Wire Tighteners	Page 14-15
Crimp Sleeves	Page 20
Tension Springs	Page 13
Corner Insulators	Page 34
4" Tube Insulators	Page 35
1¾" Staples	Page 16
5" Brace Pins	Page 17
12" Brace Pins	Page 17

The number of posts and gates needed will vary based on conditions of your terrain and your preferences. Recommended post spacing is 25' depending on conditions.

⚠ California residents see page 2 for Proposition 65 Warning

Material List

Energizer	Pages 24-27
Ground Rods	Page 31
Ground Rod Clamps	Page 31
Ground Wire	Page 31
Power-Surge Protector	Page 33
Electric Fence Warning Sign	Page 30
Lightning Choke Coil/Diverter	Page 33
Split-Bolt Line Taps	Page 19
Cut-Out Switches	Page 30
Voltage Tester	Page 32
Underground Cable	Page 31

ADD ELECTRICITY

There are many advantages to electrifying your high-tensile fence. The life of the fence will be extended because it reduces the pressure from livestock and requires less material maintenance over time. An electric fence is a psychological barrier rather than a physical one, so the animal must be trained to respect the fence. The electric package below is for areas with access to electric. For remote areas, a battery-operated or solar energizer is needed.

EC8

MWLA

VPK

GU100

INSTRUCTIONAL MATERIALS

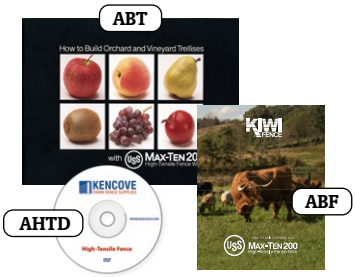

Books & Videos ⚠

Need detailed information on how to build high-tensile fence, woven wire fence, or vineyard trellises? Our books and videos will guide you step-by-step through the process. How to Build Orchard and Vineyard Trellises is 47 pages of detailed instructions on using Max-Ten High-Tensile Wire for a strong, long-lasting support system.

High-Tensile Installation DVD . . . . . AHTD . . . Free
Woven Wire Installation DVD . . . . . ATD . . . . . Free
Post Driver DVD. . . . . APDD . . . Free
Max-Ten How to Build Trellises Book . . . ABT 6.00
Max-Ten High-Tensile Book. . . . . ABF 20.00

KIWI® Fence School

Taught by experienced professionals in the industry, the school offers the latest installation techniques and building options with 2 days of hands-on and classroom training. Topics include high-tensile wire, woven wire, horse fencing, and more. The school is usually held twice a year (Spring and Fall).
Call for more details.

NOTES

INTRODUCING
THE KENCOVE REWARDS PROGRAM

We know farming is more than a job - it's a way of life. That’s why we’re proud to give back to the folks who keep our industry thriving. With our rewards program, you’ll earn points every time you shop with us. The more you do, the more points you unlock to save on future orders. Whether you're a fence contractor, a hobby farmer, or one of our dealers, we’re here to support your success. Visit us online or call your favorite product specialist to sign up today and start reaping the rewards!

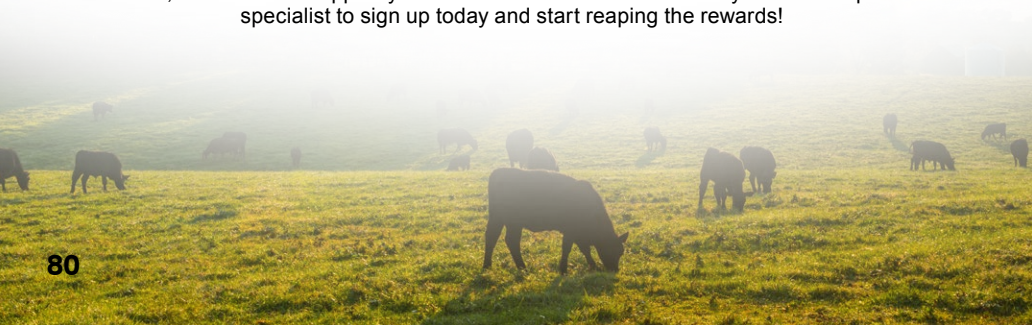

INDEX

Anchors, 20
Barbed Wire, 5
Battens/Droppers, 45
Battery Energizers, 27
Behlen Country, 59
Bending Tool, 11
Brace Pins, 17
Bracing, 17, 39, 44, 45
Brackets, 17, 29
Braid, 63, 69, 70
Bryce Suma Post Drivers, 48
Buckles, 70-75
Bungy Rope, 56
Cable Cutters, 22
Chain Grabs, 23
Chargers, 24-27
Clips, 44, 45
Coated Wire, 72
Connectors, 18-20
Cotter Pins, 60
Coupler Valves, 59
Crimp Sleeves, 20
Crimp Tools, 21
Cut-Out Switches, 30
Cyclops, 24
Deer Fence, 10, 67
Deer Gates, 55
DEWALT Staple Gun, 16
Dolly, 28
Drill Bits, 17, 54
Drive Caps, 60
Drivers, 46-53
Drivers, T-Post, 46-47
Droppers, 45
Earth Anchors, 20
Electric Braid, 63, 69, 70
Electric Fence, 24-41
Electric Rope/Tape, 69-71
Electric Netting, 40-41
Energizers, 24-27
Energy Limiter, 33
Farmhand Driver, 46
Fence Monitors, 32
Fence Signs, 30
Fence Testers, 32
Fencer's Choice®, 11, 12, 17, 19, 30, 31, 46, 63, 69, 70, 71, 72
Fiberglass Posts, 60-61
FiberRod, 60
Fixed-Knot, 6-7, 10
Gallagher Tumblewheel, 62
Gate Handles, 57
Gates, Tube, 55-56
Gates, Spring-Tape, 56
Gripple, 18
Ground Rods, 31
Gudgeon Gate Hole Guide, 56
Guy Wire, 20
High-Tensile (Book), 79
High-Tensile Wire, 4-5
Hinge-Joint, 7
Hog Ring Guns, 67
HorseRail®, 74-75
HotCote®, 72
HotTop® Plus, 74
Hydraulic Post Drivers, 48-53
Inline Tighteners, 14-15
Insulators, 34-39
Insultube, 31
Jennies, Spinning, 12
Jobe Valves, 58
Kencote™, 72
Kencove Post Drivers, 50
Kiwitech, 65-66
KIWI®, 6, 12, 13, 14, 15, 16, 17, 19, 20, 21, 31, 33, 34, 35, 36, 37, 45, 51, 54, 73, 79
KIWI® Post Drivers, 51
KIWI® Woven Wire, 6
Knipex, 22
Latches, Gate, 54
Lead-Out Wire, 31
Lightning Protection, 33
LockJawz, 39
Max-Ten Wire, 4-5
Measuring Wheel, 12
Megaflow Valves, 58
Milwaukee Fencing Stapler, 16
Monofilament, 10, 67
Montana Post Driver, 52
Netting, Electric, 40-41
Nitro Post Drivers, 49
O'Briens, 62, 64
Offsets, 38
Patriot, 24, 27
Pigtail Step-In Posts, 62
Plasson Couplers, 58-59
Pliers, 22
Polytape, 71
Polywire/Polytwine, 63, 66
Ponyrail, 74
Poplar Board, 71
Portable Fence, 40-41
Portable Posts, 60-62
Post Drivers, 46-53
Posts, Fiberglass, 60-61
Posts, Step-In, 62
Posts, Wood, 42
Powered Crimper, 21
ProCrimp, 21
Puller, Post, 44, 46
Quick-Ends, 19
Quick-Splices, 19
Quick-Brace, 17
Rail, 70, 74-75
Reels, 64, 65
Reel Holder, 62
Reel Mounting Post, 62
Ribbon, 63
Rod Posts, 60-61
Rope, 69-70
Rotational Grazing, 58-66
Screw-In Insulators, 36
Screws, 36
Signs, 30
Sheep Fence, 8, 40-41
Sleeves, Crimp, 20
Solar Chargers, 27
Solar Panels, 28-29
Solar Dolly, 28
Speedrite, 26, 27, 32, 63, 70
Spinning Jennies, 12
Splicers, 19, 63
Split Bolts, 19
Spring Gates, 56
Springs, 13, 63
Staples, 16
Staple Guns, 16
Staple Puller, 22
Step-In Posts, 62
Strainers, 14-15
Strainrite, 15, 21, 22, 34, 36, 38, 56, 63
Stock Tanks, 59
Stretcher Clamps, 11
Strip Grazer, 27
Sucker Rod, 60
Swagers, 21
Tamper, 45
Tape Gates, 70
Tape Fence, 71
Tension Springs, 13, 63
Tension Tools, 11, 13, 15, 18, 19
Testers, 32
Tighteners, 14-15
Tightlock, 6-7, 10
Titan Post Drivers, 47
Tools, Woven Wire, 11, 23
Tornado Wire, 9
Torque Tools, 18
T-Posts, 43
T-Post Driver, 46-47
T-Post Puller, 44, 46
Trellis (Book), 79
Tru-Test Waterers, 59
Tube Insulators, 35
Tumblewheel, 62
Twine, 63, 66
Twist Tool, Wire, 11
Underground Wire, 31
Valves, 58-59
Vector Post Drivers, 53
Videos, 79
Voltmeters, 32
Warning Signs, 30
Water Troughs, 59
Water Valves, 58-59
Wedge-Loc, 44
Wire, Barbed, 5
Wire, Coated, 72
Wire, Ground, 31
Wire, Guy, 20
Wire, High-Tensile, 4-5
Wire, Lead-Out, 31
Wire, Underground, 31
Wire Cutters, 22
Wire Dispensers, 12
Wire Tighteners, 14-15
Wire Twist Tool, 11
Wood Posts, 42
Woven Wire, 6-10

DELIVERY TIME

Our commitment to the agricultural community has made us one of the nation's leading distributors of farm fence supplies. With shipping warehouses in Blairsville, PA, Caldwell, ID, Earl Park, IN, and Peculiar, MO, we can assure product availability and quick shipment of orders.

From Blairsville, PA

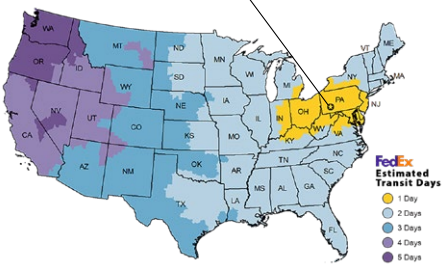

From Caldwell, ID

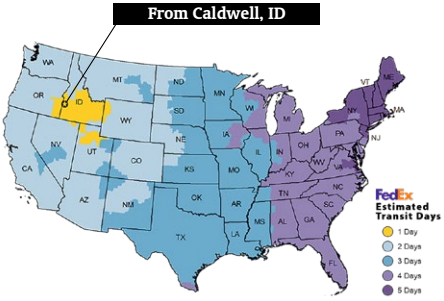

From Earl Park, IN

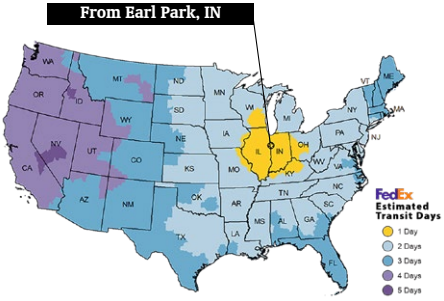

From Peculiar, MO

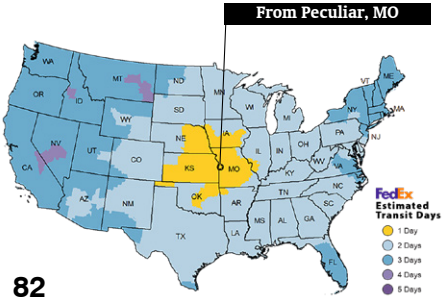

Shipping Policy

Free shipping on orders of $99.00 or more with no oversize or heavy items (indicated with). Free shipping applies to the Contiguous US only. Any orders shipping to AK, HI, Canada, or Mexico that are free shipping qualified are eligible for up to a 20% shipping discount. Kencove pays the shipping portion of your order which qualifies for free shipping. If a truck shipment is lower cost and you can unload the truck, we pay the portion of the truck shipment cost that is free shipping qualified. $45.00 pallet fee may apply for oversize items such as deer net, woven wire, and t-posts.

Items marked with do not qualify for free shipping (these are usually large or heavy products).

Shipping carrier and charges are based on order weight, size, and destination. We work with dozens of shipping carriers to find the best rates. For freight or flatbed shipments, the customer is responsible for off-loading and signing for goods on arrival. Carefully inspect your order upon receipt and notify the carrier of damaged or missing packages. This information must be documented on the bill of lading. Shortages or errors must be reported to Kencove within 48 hours. FedEx fees, such as address corrections and Saturday delivery, are charged as published by the shipping carrier. For international shipments, the customer is responsible for all customs in the form of duties and taxes associated with the shipment. Freight quotes do not include this cost.

Payment Policy

1. MasterCard/Visa/Discover Card
2. Prepayment (check/money order) received prior to shipping:
   - *Call for quote, including applicable shipping charges*
   - *Make check payable to: Kencove Farm Fence, Inc*
   - *$30.00 Returned Check Fee*

Tax Policy

Sales tax is charged in AL, AR, AZ, CA, CO, CT, FL, GA, HI, IA, ID, IL, IN, KS, KY, LA, MA, MD, ME, MI, MN, MO, NC, ND, NE, NJ, NV, NY, OH, OK, PA, SC, SD, TN, TX, UT, VA, VT, WA, WI, WV, and WY. *Signed forms are needed to show tax exempt status.*

To file for tax exempt status, complete the applicable form available in the footer of our website and email to ar@kencove.com. ***Tax forms must be submitted prior to the processing of order for elgibility.***

Returns

Contact us for a return merchandise authorization (RMA) number. All returns must be made within 30 days of receipt to be eligible for a refund. Return must be postmarked within 15 days. ***All returned items*** are subject to a minimum restocking fee of 20%.

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

Order Form

2025

Name: _____ Customer #: _____

Shipping Address: _____

City: _____ State: _____ Zip: _____

Phone: _____ Email: _____

Quantity	Item Code	Description	Price Each	Price Total

Thank you for your order!

Mail to Kencove Farm Fence, 344 Kendall Rd, Blairsville, PA 15717.
Fax to 888-908-5353 or Email to sales@kencove.com.
Order online at www.kencove.com or call 1-800-KENCOVE.

☐ Allow Backorders

Shipping:	
Sales Tax:	
Order Total:	

Terms: AL, AR, AZ, CA, CO, CT, FL, GA, HI, IA, ID, IL, IN, KS, KY, LA, MA, MD, ME, MI, MN, MO, NC, ND, NE, NJ, NV, NY, OH, OK, PA, SC, SD, TN, TX, UT, VA, VT, WA, WI, WV, and WY residents add state sales tax. Shipping: Free shipping on orders of $99.00 or more with no FOB (heavy or oversize) items within Contiguous US only. Any orders shipping to AK, HI, Canada, or Mexico that are free shipping qualified are eligible for up to a 20% shipping discount. Orders under $150.00 with no FOB items = $15.00 shipping (applies only to mail-in orders accompanied by this order form). $25.00 fee for Canadian checks under $300.00. $30.00 returned check fee. Prices subject to change without notice. Customer pays all shipping charges on FOB ( ) items. See additional terms on page 2.

Payment Method (see payment terms, page 82):

☐ Money Order/Cashiers Check

☐ Personal Check Check #: _____ Amount: _____

☐ Visa/Mastercard/Discover

Cardholder Name: _____ Credit Card #: _____

CCV # (last 3 digits on back of card): _____ Expiration Date: _____

Signature: _____ Date: _____

KENCOVE
FARM FENCE SUPPLIES

344 Kendall Road, Blairsville, PA 15717

NEWLY-EXPANDED WEST COAST COVERAGE

NOW OPEN IN
CALDWELL, ID